

BUTTE-SILVER BOW MS4 2022 ANNUAL REPORT



The City and County of

Butte-Silver Bow Montana

Prepared for:

Butte-Silver Bow Metro
800 Centennial Road
Butte, MT 59701

Butte-Silver Bow Public Works
126 W. Granite St.
Butte, MT 59701

Submitted by:

Water & Environmental Technologies
480 East Park Street
Butte, MT 59701
406 782 5220

FORM
MS4-AR

Annual Report Form
Storm Water Discharges Associated with MS4s
MTR040000

This annual report form is to be completed by each permittee authorized under the General Permit for Storm Water Discharges Associated with Small Municipal Separate Storm Water Sewer Systems (MS4s). The completed form must be electronically submitted to DEQ by March 1st of each year starting March 1st, 2023.

Reporting Year: ☒ 2023 ☐ 2024 ☐ 2025 ☐ 2026 (reporting period is for the preceding calendar year, Jan 1st - Dec 31st)

MS4 Information

Permit Number M T R 0 4 0 0 0 6
Small MS4 Name Butte-Silver Bow (BSB)
Contact Person, (name, title) Mark Neary, BSB Public Works Director
Mailing Address 126 West Granite
City, State, and Zip Code Butte, MT, 59701
Phone Number, Email Address 406-497-6519, mneary@bsb.mt.gov

Authorized as a Co-permittee? ☒ Yes: Montana Department of Transportation - Butte Division ☐ No

(If, yes provide Co-permittee MS4 name in the blank provided. Each co-permittee must submit a separate complete annual report form.)

Is the MS4 sharing responsibility? If yes, attach written acceptance and explanation of shared obligation(s). ☐ Yes ☒ No

Attach an organizational chart identifying the primary SWMP coordinator, positions responsible for implementing requirements of the permit, and contact information for each individual. ☒ Attached ☐ Not Attached **Appendix A**

Minimum Control Measure 1 & 2

Link to storm water website <https://bsbstormwater.org/>

List of four key target audiences:	Associated Pollutants:	Outreach strategy:
<u>Youth, RV owners, Gardeners</u>	<u>Nutrients, Trash/Debris, Sediment</u>	<u>Community Artwork/Public Events/Social Media</u>
<u>Smokers, Drivers, Pet & Home Owners</u>	<u>Nutrients, Trash/Debris, Sediment</u>	<u>Radio/TV advertisements/Education Brochures</u>
<u>Gas Stations</u>	<u>Hydrocarbons, Trash/Debris, Sediment</u>	<u>Education Brochures/Radio/TV</u>
<u>Smaller Construction Companies</u>	<u>Trash/Debris, Hydrocarbons, Sediment</u>	<u>Class work/Training</u>

Attach documentation of participation and/or feedback of key target audiences. ☒ Attached ☐ Not Attached

See CFWEP Reports Appendix B for summary of MCM 1&2 and documentation of participation/feedback.

Minimum Control Measure 3 (attach the following in the order listed)

List of potential non-storm water discharges identified as significant contributors of pollutants (i.e. illicit discharges), associated pollutants, and any local controls or conditions placed on these discharges. ☒ Attached ☐ Not Attached **Appendix C**

Have there been updates to the MS4's storm sewer maps? ☒ Yes ☐ No, the map(s) were last updated: _____

If yes, submit the maps using one of the following options:

☐ Electronic GIS shapefiles emailed to DEQMPDESDataManagement@mt.gov

☒ Attached Hard copy **Appendix D**

☒ Link to online map: https://bsbstormwater.org/wp-content/uploads/2023/02/APP_E-outfall-maps.pdf

**BSB Maintains GIS Maps
of the SW Infrastructure**

Summary of investigations and corrective actions taken over the past year per the Illicit Discharge and Corrective Action Plan. ☒ Attached ☐ Not Attached

Number of outfalls inspected during dry weather: 26 of 72 (total number of outfalls)

Number of high priority outfalls inspected: 4 of 4 (total number of high priority outfalls)

Attach a summary of any resulting actions taken from screening results. ☒ Attached ☐ Not Applicable **Appendix E**

Year 2023 only, unless updates were made:

A copy or link to the adopted ordinance, policy, procedure, and/ or regulatory mechanism prohibiting illicit discharges.

☐ Attached or ☒ Link https://bsbstormwater.org/wp-content/uploads/2018/11/BSB_ERP_May-2018.pdf

Minimum Control Measure 4 (attach the following in the order listed)

List of construction sites/projects inspected over the last year and any resulting actions. ☒ Attached ☐ Not Attached

Year 2023 only, unless updates were made:

A copy of the construction storm water management plan review checklist. ☒ Attached ☐ Not Attached

A copy of the construction site inspection form or checklist. ☒ Attached ☐ Not Attached

A copy or link to the adopted ordinance, policy, procedure, and/or regulatory mechanism requiring construction storm water controls. ☒ Attached or ☐ Link <https://bsbstormwater.org/construction/>

**Appendix F
includes list and
forms for MCM
4 requirements**

Minimum Control Measure 5 (attach the following in the order listed)

Inventory of regulated projects using offsite treatment for post-construction runoff. ☐ Attached ☒ Not Applicable

Number of high priority post-construction storm water management controls inspected: 0

Attach a summary of any resulting actions taken from inspections. ☐ Attached ☒ Not Applicable

Year 2023 only, unless updates were made:

A copy of the post-construction storm water management plan review checklist. ☒ Attached ☐ Not Attached

A copy of the post-construction site inspection form or checklist. ☒ Attached ☐ Not Attached

A copy or link to the adopted ordinance, policy, procedure, and/or regulatory mechanism requiring post-construction storm water controls. ☒ Attached or ☒ Link <https://bsbstormwater.org/construction/>

Appendix G

Year 2025 only: Submit a plan to modify relevant codes, ordinances, policies, and/or programs to implement LID/green infrastructure concepts. ☐ Attached ☐ Not Attached

Minimum Control Measure 6 (attach the following in the order listed)

Number of SOPs evaluated: 24 of 24 (total number of SOPs for permittee facilities/activities)

Summary of SOP updates made in the last year. ☒ Attached ☐ Not Applicable **Appendix H**

Records of completed trainings in conformance with section II.B. of the General Permit. ☒ Attached ☐ Not Attached

Appendix I

Year 2023 only, unless updates were made:

Appendix J

Inventory of permittee facilities/activities with potential to contribute contaminants. ☒ Attached ☐ Not Attached

Summary of inspection procedures for facilities and their structural storm water controls. ☒ Attached ☐ Not Attached

Storm Water Management Plan (SWMP)

In the last year, were any public comments received on the SWMP? ☐ Yes ☒ No

If yes, attach a summary of comments received. ☐ Attached ☒ Not Applicable

In the last year, have additional SWMP updates been made other than those listed above? ☒ Yes ☐ No

If yes, attach a summary including the date and description of updates and rationale for decision making.

☒ Attached ☐ Not Applicable <https://bsbstormwater.org/management/>

Appendix K

Monitoring and Reporting (attach the following in the order listed)

☒ I verify all outfall monitoring has been performed and recorded in conformance with section II.C. and II.D. of the General Permit. (If not able to dependably obtain two samples a year at each monitoring location, attach a summary of rationale. Contact DEQ regarding requests for a change in monitoring locations.)

Appendix L includes rationale for not obtaining two samples in 2023.

Attach a summary of implemented BMPs used to target and reduce discharges to impaired waterbodies and a schedule for the following year's BMP implementation. ☒ Attached ☐ Not Applicable

Appendix M

Year 2023 only, unless updates were made: Attach an inventory of outfalls discharging to impaired waterbodies including associated pollutants. ☒ Attached ☐ Not Applicable

Appendix N includes all monitoring and reporting summary/inventories

MS4s with an approved TMDL:

Year 2023 only: Submit a TMDL-related sampling plan for DEQ review. ☒ Attached ☐ Not Applicable

Appendix O

Years 2024, 2025, and 2026: In the last year, were any public comments received on the sampling plan? ☐ Yes ☐ No

If yes, attach a summary of comments received and any resulting actions/modifications. ☐ Attached ☒ Not Applicable

Certification*

All Permittees Must Complete the Following Certification:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. [75-5-633, MCA].

Name (Type or Print)

Title (Type or Print)

Phone Number

Signature


Date Signed

* This Annual Report Form must be completed, signed, and certified as follows:

- For a corporation, by a principal officer of at least the level of vice president;
- For a partnership or sole proprietorship, by a general partner or the proprietor, respectively; or
- For a municipality, state, federal, or other public facility, by either a principal executive officer or ranking elected official.

Appendix A
Butte Silver Bow
Stormwater Management Program
Organization Chart

Butte-Silver Bow MS4 Stormwater Control Measure Responsibility Organizational Chart

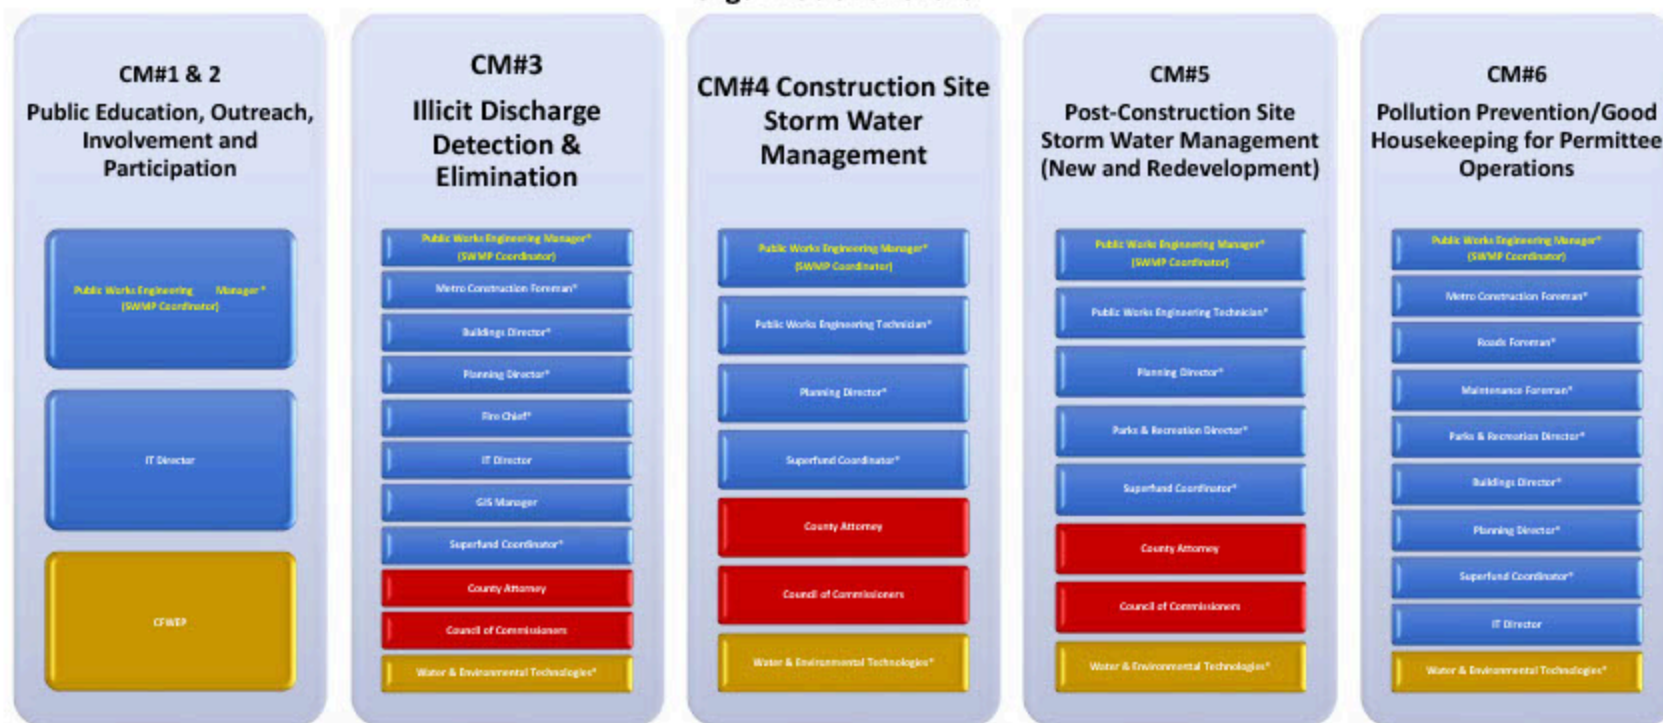

Legend:



* SWMP Team Member



**City of Butte Municipal Separate Storm Sewer System (MS4)
Storm Water Management Team (SWMT) Members Contact Information**

NAME	ORGANIZATION	Phone #	Email
JP Gallagher	BSB Chief Executive	406-497-6200	jgallagher@bsb.mt.gov
Mark Neary	BSB PW Director	406-497-6519	mneary@bsb.mt.gov
Kyle West	BSB PW Engineering	406-497-6532	kwest@bsb.mt.gov
Dylan Pipinich	BSB Planning Director	406-497-6256	dpipinich@bsb.mt.gov
Zane Gleason	Project Manager/Compliance Specialist	406-497-6518	zdgleason@bsb.mt.gov
John Sullivan	BSB Gov't Buildings Director	406-497-6573	jsullivan@bsb.mt.gov
Bob Lazzari	BSB P & R Director	406-497-6571	blazzari@bsb.mt.gov
Pete Schonsberg	BSB P & R Park Superintendent	406-497-6571	pschonsberg@bsb.mt.gov
Eric Hassler	BSB Reclamation & Environmental Services Director	406-497-5042	ehassler@bsb.mt.gov
Jim Dennehy	BSB Water Treatment Superintendent	406-723-9429	idennehy@bsb.mt.gov
Tom Loggins	BSB Roads	406-497-6567	tloggins@bsb.mt.gov
Bill Andrene	BSB Metro Sewer	406-497-6553	wandrene@bsb.mt.gov
Justin Thatcher	BSB Metro Maintenance	406-431-2011	jthatcher@bsb.mt.gov
Rayelynn Brandl	CFWEP	406-496-4898	rbrandl@mtech.edu
Josh Vincent	WET	406-723-1534	jvincent@waterenvtech.com
Stephen Coe	WET	406-299-9858	scoe@waterenvtech.com

Appendix B
CFWEP Public Outreach Summary

2022 BUTTE-SILVER BOW STORM WATER EDUCATION REPORT TO DEQ: CFWEP DELIVERABLES



Clark Fork Watershed
Education Program

Report provided by:
Melissa Wanamaker
Director Community Engagement & Development
(406) 496-4790, mwanamaker@mtech.edu

Executive Summary



Clark Fork Watershed
Education Program

The Clark Fork Watershed Education Program (CFWEP) is responsible for the public education and outreach and public participation aspects of the MS4 permit through contract to Butte-Silver Bow County. CFWEP met or exceeded all contract deliverables during the 2022 calendar year.

The following pages give detailed descriptions of the outreach strategies, the audiences served, and the numbers of persons engaged in each project. In 2022, CFWEP focused efforts to increasing community engagement and developing two new television and five new radio ads. Radio ads were completed fourth quarter 2022 and started airing in the first quarter of 2023 and will continue through the 2023 permit year. Television ads are due to begin in Spring of 2023. The program also re-invigorated community clean up days, building upon the adaptations that were developed during COVID to include ten schools in Butte. CFWEP also added additional community activities to the month of service and clean-up that was started in 2019, expanding beyond just clean-ups to include the additional education and outreach via gardening and art. These Earth Month activities were well-received by the community and partners have requested to participate in 2023.

Targeted business campaigns to be delivered in 2023 include gas stations and small contractors. The education for gas stations is focused on spill prevention and clean-up strategies. The small contractor education will focus on permit compliance and provide a listening session between contractors and Butte-Silver Bow to address concerns and difficulties with the permit process. These sessions will likely inform the SWMP as well.

In 2022, we were able to do direct Stormwater education outreach to 1062 students and an additional 649 community members.



1. MCMs 1 and 2: Public Education, Outreach, Involvement and Participation
 - a. Develop and continue to utilize the permittee's storm water website for public involvement:
 - i. Review and Update website: Done.
 - ii. Provide opportunity for public comments: Done through website.
 - b. Determine key target audiences most appropriate for storm water education and outreach. Team determined:
 - Community Focus:
 - youth;
 - gardeners;
 - home owners;
 - pet owners;
 - RV users;
 - smokers;
 - drivers.
 - Business focus:
 - Gas Stations;
 - and Smaller Construction Companies.



Clark Fork Watershed
Education Program

c. Identify and develop outreach formats, distribution channels and messages for each key target audience and behavior.

Passive strategies:

- Advertisements on KBOW/KOPR/KBMF. DJs on KBMF incorporated stormwater messaging in all shows during Earth Month.
- Minimal television advertising because of the decision to freshen the messages. A small campaign was run on NBC from May-July with old messaging.
- Stormwater Education brochures and flyers at all events
- Community Artwork: Earth Month First Friday Art Exhibit, Clark Chateau Young Creators and Chalk Art
- Social Media: Facebook and Instagram Stormwater Campaigns

Active Strategies: Exceeded required four.

- Clean Up Days/Events: CUBS Week Student Cleanups, City Employees Clean Up, Montana Tech Student and Employee Clean Up. Exceeded 650 participants.
- Participation in Community Events Mayor's Kickoff, First Friday Art Walk, Earth-Air-Water Community Education, Indoor Arbor Day, Community Garden Clean Up & Family Day, East Middle School Open House. Outreach touched 485 people.
- Public Tours: six tours with 164 people
- Student Outreach/Class Work: Incorporated stormwater messaging in all field trips and trained three new employees and five volunteers to ensure messaging continues. Spent Stormwater focused curriculum time with 24 students at Kennedy Elementary brainstorming radio PSA's and playing Stormwater games after their CUBS Week clean up efforts.



d. Distribute and/or perform outreach to target audiences and track performance/public involvement:

i. Implement outreach

ii. Document participation

- CUBS Week Clean Up Days with elementary, middle school, high school students and Montana Tech: 502
- BSB Student Education/Outreach with Stormwater messaging: 604
- Community Event: 445 in person
- Broadcast reach: Winter messaging on KBOW/KOPR and KQRV. 97 ads on 3 stations plus radio remote and psa's during CUBS Week.
- Social media analytics 11,254 and 54 shares

Reach	Likes and reactions	Link clicks	Comments	Shares
11254	434	203	25	54

Community Stormwater Education

Stormwater Education

Safe stormwater stewardship is the single greatest thing an individual can do to help protect the watershed. We embedded safe stormwater tips in every activity associated with Earth Month. Curriculum was supported by social media posts, our PSA contest, conversations with students during their clean up days, radio support by KBMF and Butte Broadcasting, and our team from Montana Movie Factory.



SPRING STORMWATER TIPS

WHAT IS STORMWATER?

Stormwater is water from rain or snow that runs over land, streets, parking lots, and rooftops. This water picks up trash, chemicals, and other pollutants as it flows into surface water like creeks and streams. The water in our storm drains is not treated before it empties into our streams, making it important to have only rain down the drain!



Reduce Litter

Consider taking a walk to enjoy the spring weather and pick up trash around your neighborhood to help cut down on the amount of litter in our streets, storm drains, and waterways. Don't be a litterbug!



Pick Up Pet Waste

When walking your furry friend, always pick up waste. Harmful bacteria from pet waste washes to our streams along with increased nitrate, which results in less oxygen for our fish.



RV Waste

Only dispose of RV waste at properly designated dump stations that safely store the waste. Never empty RV waste into storm drains, which empty untreated into our local streams.



Yard Clippings

Bag and collect all yard clippings or compost them appropriately. Yard clippings can clog storm drains and the excess nutrients they contain can impact the health of our streams.



Car Wash

Use a local car wash (which is already equipped to deal with stormwater) or wash cars on your lawn to keep potentially harmful chemicals from washing into our storm drains.



Don't Dump!

Never pour anything down storm drains, which empty into our streams. Instead of dumping, take your waste to the local landfill. They accept antifreeze, vehicle batteries, metals, oil, and yard waste.



Lawn Chemicals

Research risks of chemicals that you apply to your lawn to learn about potential. Avoid applying chemicals before rain to reduce the amount of chemicals that runoff your lawn.

cfwep.org/earthmonth





Clark Fork Watershed
Education Program

Community Earth Month

April 22 - May 22

Celebrating springtime
through stewardship &
community service.

*Dare to be a force of
nature!*



MONTANATECH



Clean-Up
Days



Stormwater
Education



Landscape &
Gardening



Community
Art

Learn more & get involved at cfwep.org/earthmonth

Sponsors



Butte-Silver Bow

STORMWATER



Made possible by:



Partners



Earth Month Committee & Partners



Earth Month Sponsors, Partners and In-kind Donors

SPONSORS:



PARTNERS:



IN-KIND DONORS:



Calendar

Kickoff

Both Montana Tech and the City volunteered to host kick off celebration clean up days in honor of Earth Month

Clean Up Days

CUBS Days remains the heart of Earth Month. Twenty one teachers from 10 schools participated with over 500 student participants. We have interest in our final two Butte Schools for 2023. In addition, we were able to support (with other funds) Anaconda clean up day with all of their students and 5 rural schools that launched an Earth Month Initiative.

Stormwater & Community Education


We've launched our community stormwater tips on social media and with DJ help from KBMF. In addition, we collected ideas from the schoolchildren for our year-round professional, paid psa's.

Sustainable Landscape & Gardening

Partnering with the Library, NCAT and the BSB City Arborist helped us bring in elements beyond our skillset that will help protect the watershed and increase community stewardship.

Arts

ARTS puts the STEAM in STEM. We are grateful to partners who helped us launch community arts & education elements.



COMMUNITY EARTH MONTH

Join CFWEP in celebrating springtime through stewardship and community service!

Upcoming Events		Ways to Get Involved	
April 22	Mayor's Proclamation & BSB Public Employee Clean Up Day		
April 22 - May 22	Earth Month Community Art Challenge	Clean-Up Days	Landscape & Gardening
April 22 - May 22	Safe Stormwater PSA Competition		
April 30	Planting Native Species with MTech's Dr. Robert Pal	Stormwater Education	Community Art
May 6	Carpenter's Union Hall Earth Month Exhibit First Friday Art Walk (FREE Chalk from CFWEP!)		
May 7	Park Street Community Garden Clean Up Day		
May 9-13	CFWEP Clean Up Butte with Students (CUBS) Week		



Scan here!

Learn more and get involved at:
cfwep.org/EarthMonth

Made possible by:



Dare to be a force of nature!



KICKOFF

Chief Executive Proclamation

Chief Executive JP Gallagher caught the spirit of Earth Month. He kicked it off on Earth Day with a proclamation and a significant clean up effort by city workers.

City Workers Community Clean Up Day

Over 100 city workers came out in inclement weather to launch Earth Month with a city worker clean up of parks and trails.

Montana Tech Clean Up Day

The Associated Students of Montana Tech and Student Affairs office combined forces to bring back an old M Day tradition of cleaning up campus and the adjoining areas on Earth Day Eve.



Clean Up Days

CUBS Week: May 9-25, 2022

Active BSB Schools:



Montana Tech, Whittier Elementary, West Elementary, Emerson Elementary, Kennedy Elementary, Margaret Leary Elementary, Butte Central High School, Webster Butte High Career Center, East Middle School and Silver Bow Montessori participated. The Key Club at Butte High (via Cathy Tutty) has volunteered for 2023 and we've planted seeds with the 6th grade teachers at Hillcrest which will grow CUBS to every school in Butte. SARTA funding helped us fund pizza parties in celebration of their stewardship.

Rural Schools:

With matching funding from NRD we were able to extend some Earth Month clean up days and education activities to interested teachers in Anaconda, Gold Creek, Ovando, Deer Lodge, Lincoln and Potomac.

Other Clean Up Days:

We co-launched Earth month with the Chamber of Commerce Beautify Butte as their access to bags, recognized historical role, convenient location and parking was a more suitable fit for community members who wanted to do their own clean up. In addition we supported the Library Saturday Clean Up Crews, the Park Street Community Garden Clean Up Day and Friend of Thompson Park clean up (which was postponed due to inclement weather).

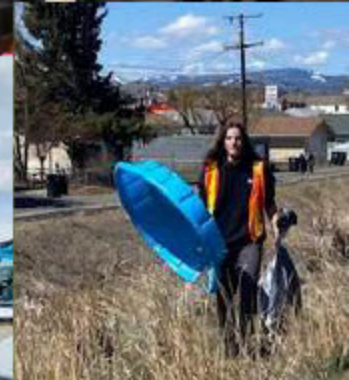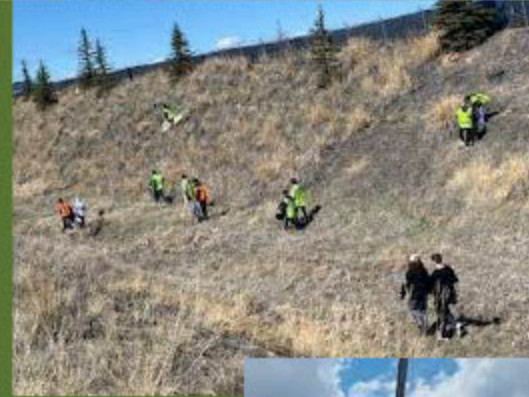



Interactive light up map of Butte was a cool tool but even our most committed partners had trouble reporting results. Due to low engagement for two years in a row, we don't intend to make it interactive in 2023.

SUSTAINABLE LANDSCAPE & GARDENING

NEW TOPIC FOR EARTH MONTH


THIS WAS A NEW ADDITION TO EARTH MONTH AND ONE OF THE MOST VALUABLE TOWARDS OUR NEW PARTNERSHIP GOALS. WE WERE ABLE TO PARTNER WITH NCAT, WHO LAUNCHED THEIR SUSTAINABLE GARDENING SERIES INSIDE EARTH MONTH. NCAT HAD A RECORD NUMBER OF PARTICIPANTS AT 35. WE ALSO PARTNERED WITH CITY ARBORIST AND WERE ABLE TO SUPPORT THEIR INDOOR ARBOR DAY ACTIVITIES. THE OTHER PARTNERS INCLUDED THE LIBRARY AND COMMUNITY GARDEN.



EARTH MONTH ART

ART

PUTTING THE STEAM IN STEM ALSO PUT SOME EXTRA FUN IN EARTH MONTH. GRATEFUL TO OUR PARTNERS AT CLARK CHATEAU YOUNG CREATORS GROUP, FIRST FRIDAY ART WALK, KBMF BUTTE AMERICA FOUNDATION AND CARPENTERS UNION HALL FOR THEIR EFFORTS ON BEHALF OF EARTH MONTH ART. WE ALSO DISTRIBUTED 200 SETS OF EARTH MONTH CHALK ART KITS TO ARTISTS OF ALL AGES AS AN INCENTIVE TO GET INVOLVED.

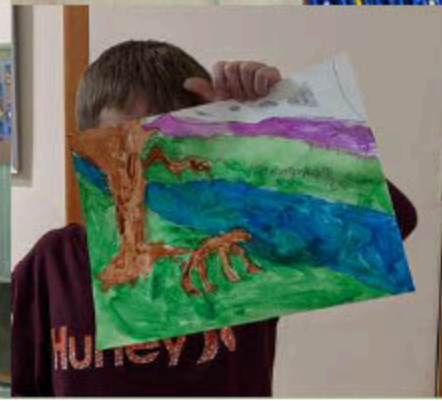

COMMUNITY EDUCATION

SPECIAL THANKS TO COMMITTEE MEMBERS WHO POINTED OUT THAT WE NEEDED A STRONG BASIC COMMUNITY EDUCATION OPPORTUNITY AND INSPIRED EARTH, AIR, WATER. DANIEL HOGAN AT KBMF MODERATED IT AND AIRED IT MULTIPLE TIMES. WE WILL ACQUIRE A COPY AND MAKE IT PUBLICLY AVAILBLE FROM OUR WEBSITE. THANKS TO DR. ROBERT PAL FROM MONTANA TECH, MARK MARIANO (THE BIRD GUY AT THE PIT) AND RAYELYNN BRANDL FOR TAKING COMMUNITY QUESTIONS AND DELIVERING A GREAT SUPERFUND 101.



KBMF & CLARK FORK WATERSHED
EDUCATION PROGRAM PROUDLY PRESENT

EARTH. AIR. WATER

COMMUNITY DIALOGUE ROUNDTABLE
IN A RECOVERING SUPERFUND

FEATURING:

DR. ROBERT PAL, ASSOCIATE PROFESSOR, MONTANA TECHNOLOGICAL UNIVERSITY &
DIRECTOR OF RESTORATION (EARTH)

MARK MARIANO, THE "BIRD GUY" AT THE BERKELEY PIT (AIR)


RAYELYNN BRANDL, EXECUTIVE DIRECTOR, CFWEP (WATER)

MODERATED BY: DANIEL HOGAN, GENERAL MANAGER, KBMF

6PM | MONDAY, MAY 9 2022

CARPENTER'S UNION HALL
156 WEST GRANITE, FIRST FLOOR

COMMUNITY EARTH MONTH 2022
[CFWEP.ORG/EARTHMONTH](https://cfwep.org/earthmonth)

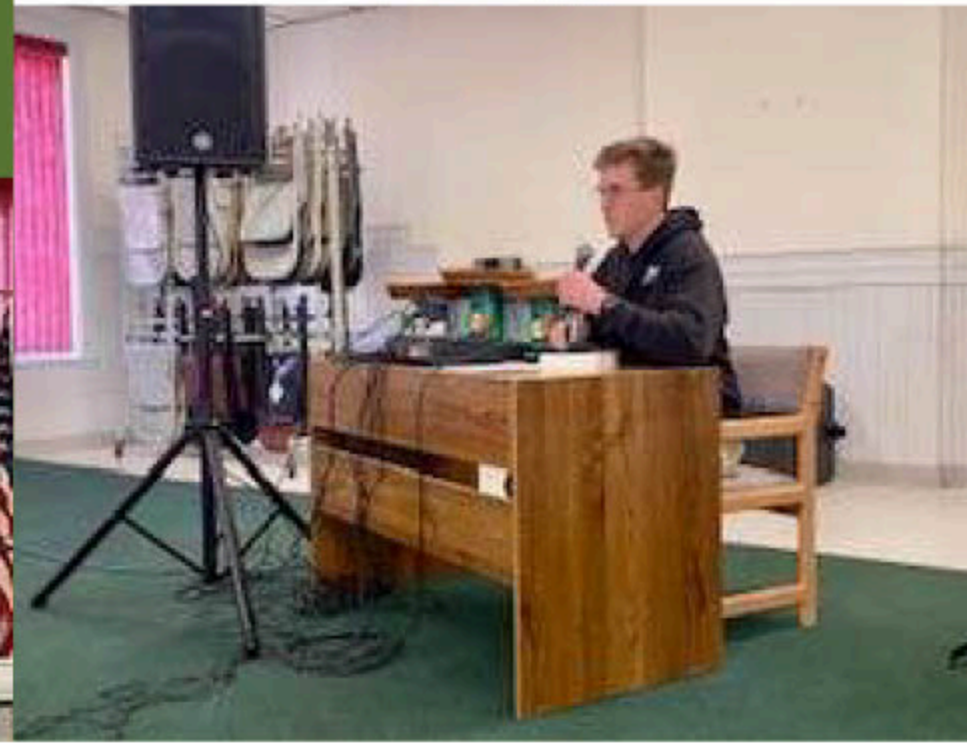

BUSINESS EDUCATION

GAS STATION STORMWATER TIPS

Water that runs over surfaces picks up pollution and carries it to local waterways. You can help protect our creeks and streams by ensuring surfaces are free from contaminants and knowing what to do if a spill occurs.

BEST PRACTICES

- Never leave vehicles unattended while fueling.
- Properly maintain fuel dispensing equipment and pumps.
- Emergency shut off button should be in plain view and clearly marked in red letters.
- Clearly label all equipment, pumps, valves and drains.
- Use secondary containment when transferring fuel from a tanker truck to onsite fuel tanks.
- Cover storm drains in the vicinity during fuel transfers.
- Inspect hoses and pumps and clean leaks and drips daily.

SPILL RESPONSE

- 1. Control**
Never leave vehicles unattended while fueling.
- 2. Contain**
Never leave vehicles unattended while fueling.
- 3. Clean Up**
Never leave vehicles unattended while fueling.
- 4. Communicate**
Never leave vehicles unattended while fueling.

BROUGHT TO YOU BY:



Draft Poster Ideas:



STORMWATER POLLUTION PREVENTION IDEAS FOR GAS STATIONS

Gas stations and other fueling operations, including truck stops, fleet yards, airports and construction sites, serve to refuel motor vehicles, equipment or small containers with petroleum products. Spills and leaks can occur during fueling and contaminate stormwater runoff, surface water and groundwater with toxic hydrocarbons, oil, grease, heavy metals and other chemicals used as fuel additives.

Best Practices to protect our creeks:

1. Encourage patrons to never leave vehicles unattended while fueling;
2. Post signs reminding users not to top off gas tanks;
3. Ensure Emergency Shut Off button is in plain view and clearly marked in red letters;
4. Minimize water use in spill clean up by using dry clean up methods like sweeping litter and debris and using rags and absorbents for leaks and spills;
5. Remove used absorbents promptly and dispose of properly;
6. Ensure all equipment, pumps, valves and drains are clearly labeled;
7. Use secondary containment when transferring fuel from a tanker truck to onsite fuel tanks;
8. Cover storm drain in the vicinity during the transfer;
9. Review and understand spill response plan; and
10. Practice regular good housekeeping practices inspecting hoses and pumps and cleaning leaks and drips daily.

We take spill response very seriously. If a spill is significant enough to escape property, report immediately .

Spill Contact:

Contact name and number



Clark Fork Watershed
Education Program

Butte Silver Bow
STORMWATER

Our business education focus is based on current events and concerns in our community. In 2021, a significant gas station spill impacted Silver Bow Creek. The team decided a simple poster aimed at gas station attendees would be a valuable outreach. We are also planning an educational outreach towards smaller construction companies to help them efficiently navigate the stormwater permit requirements. This training is based on concerns expressed at a recent planning meeting.

ADVERTISING

Radio partners

Butte Broadcasting conducted a live remote during CUBS week interviewing students, teachers and adult volunteers on the air. They also shared community education on stormwater practices and gave us some psa time.

KBMF DJ's volunteered to read stormwater practices on the air during Earth Month and joined as a partner to promote all the Earth Month events to the community.

Social media

Our communications coordinator did an outstanding job creating a comprehensive social media campaign on Facebook and Instagram highlighting the opportunities available. Campaign detailed in attachment 1.

The Montana Tech communications department helped us send out media advisories and psa's for a variety of Earth Month events and activities. In 2023, we will be able to further strengthen promotions both paid and unpaid. Francene Archibald from NBC has offered to advise and help secure additional media support of the events.



TV Public Service Announcements

The team decided to refresh the television and radio outreach commercials using a child with a fishing pole watching adults make poor stormwater decisions and encouraging better choices. The young man was recruited through our fly fishing and conservation camp. The television commercials were filmed Fall 2022 and are in production for planned launch of Spring 2023.



Radio Public Service Announcements

The team decided to refresh the radio outreach commercials. We have two new Winter Stormwater education public service announcements running this winter and five ready to drop during Earth Month with Spring and Summer messaging.

Many of the ideas for public education were generated while talking to kids during the 2022 spring clean up effort.

Topics:

Storing Snow

Using Ice Melt



Bag your Clippings

Washing Car

RV Dumping

Cigarette Butts

What is Stormwater?

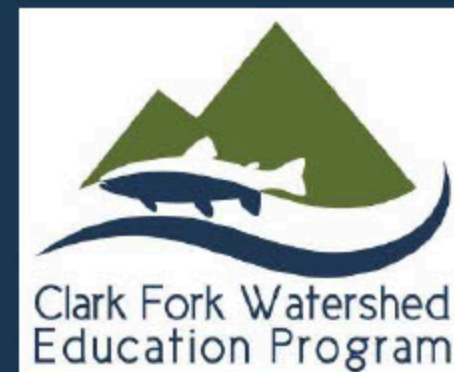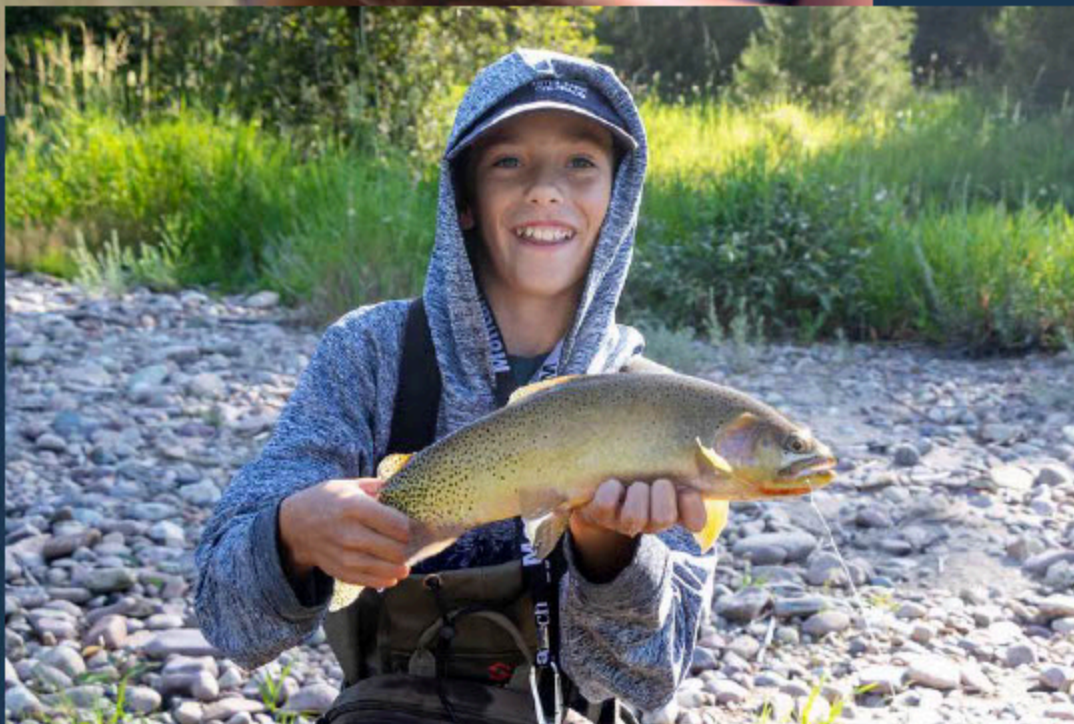

Email
MWANAMAKER@MTECH.EDU

Website
CFWEP.ORG

Phone number
(406) 496-4790

Appendix C

Non – Stormwater Discharge/Flow Assessment

MS4 General Permit Part II.A.3.a.i
2022 annual assessment of non-storm water discharge or flows

Significant contributors of pollutants are as follows:

1. Water line flushing/fire hydrant flushing

Why:

Water line flushing and fire hydrant flushing are municipal operations which discharge chlorinated water onto streets and have the potential to mix with oil & grease, sediment, debris, and other pollutants. These non-storm water discharges have the potential to reach area surface waters via municipal storm water system and are allowable if all conditions are met.

Associated pollutants may include:

- Total Suspended Solids (TSS)
- Oil & Grease
- Metals
- Chlorine
- Debris

Education:

- Train BSB field personnel on SOPs, BMP selection, installation, and maintenance

Local controls:

- SOP#18 – Hydrant Flushing
- SOP#20 – Water Main Breaks and Repairs
- Coordination with BSB Road Dept to ensure street sweeping is conducted prior to water line/fire hydrant flushing
- Installation of BMP (i.e., street sweeping, inlet protection) prior to performs routine street sweeping prior to water line/fire hydrant flushing
- Use of chlorine diffusing device and tablets while water line/fire hydrant flushing is conducted
- Re-evaluate annually

2. Street cleaning/flushing

Why:

Street cleaning/flushing are municipal operations which discharge chlorinated water onto streets and have the potential to mix with oil & grease, sediment, debris, and other pollutants. These non-storm water discharges have the potential to reach area surface waters via municipal storm water system and are allowable if all conditions are met.

Associated pollutants may include:

- Total Suspended Solids (TSS)
- Oil & Grease
- Metals
- Chlorine
- Debris

Education:

- Train BSB field personnel on SOPs, BMP selection, installation, and maintenance

Local controls or conditions:

- Coordination with BSB Road Dept to ensure street sweeping is conducted prior to street flushing
- Installation of BMP (i.e., street sweeping, inlet protection) prior to performs routine street sweeping prior to street flushing
- Re-evaluate annually

3. Discharges or flows from firefighting activities**Why:**

Fighting fires is a municipal operation which discharges chlorinated water onto streets and have the potential to mix with oil & grease, sediment, debris, and other pollutants. These non-storm water discharges have the potential to reach area surface waters via municipal storm water system and are allowable if all conditions are met.

Associated pollutants may include:

- Total Suspended Solids (TSS)
- Oil & Grease
- Metals
- Chlorine
- Debris

Education:

- Train fire personnel on SOPs

Local controls or conditions:

- SOP#18 – Hydrant Flushing
- BSB Road Dept conducts routine street sweeping
- Re-evaluate annually

4. Landscape irrigation/lawn watering**Why:**

Excessive landscape irrigation/lawn water if it reaches a street has the potential to mix with oil & grease, sediment, debris, and other pollutants. Landscape irrigation/lawn

water that doesn't infiltrate into the soil may discharge along curb/gutter and reach area surface waters via municipal storm water system and are allowable if all conditions are met.

Associated pollutants may include:

- TSS
- Oil & Grease
- Metals
- Chlorine
- Debris

Education:

- Train public on resource benefits of limiting landscape irrigation/lawn watering
- CFWEP educate students on water conservation

Local controls or conditions:

- BSBPW provides water meters to the public to promote water conservation
- BSBPW limits watering days to every-other (June-October)
- Re-evaluate annually

5. Uncontaminated ground water infiltration/inflow

Why:

Uncontaminated ground water infiltration/inflow may be considered an allowable non-storm water discharge if all conditions are met.

Associated pollutants may include:

- Nutrients: Phosphorus, Nitrogen
- Metals

Education:

- Train BSB field personnel on smoke testing

Local controls or conditions:

- Smoke testing and infiltration/inflow (I/I) identification projects are ongoing and will guide capital improvements to the collection system over the next 30 years
- CCTV inspection if I/I suspected
- Re-evaluate annually

6. Springs

Why:

Spring water may be considered an allowable non-storm water discharge.

Associated pollutants may include:

- Metals

Education:

- Train BSB field personnel recognizing signs of flow from spring
- Train BSB field personnel on BMP selection, installation, and maintenance

Local controls or conditions:

- Re-evaluate annually

7. Flows from riparian habitats and wetlands

Why:

Flows from riparian habitats and wetlands may be considered an allowable non-storm water discharge.

Associated pollutants include:

- Nutrients: Phosphorus, Nitrogen
- Metals

Education:

- Train BSB field personnel recognizing signs of flow from riparian habitats and wetlands

Local controls or conditions:

- Culvert placement to direct wetland waters
- Monitoring by agencies (Superfund, etc.)
- Re-evaluate annually

MS4 General Permit Part II. A.3.b.i.**2021 annual assessment of occasional incidental non-storm water discharges or flows**

Occasional incidental non-storm water discharges that will not be addressed as illicit discharges are as follows:

Charity Car Washes**Why:**

Charity car washes produce soapy-water that have the potential to mix with oil & grease associated with the vehicle. These non-storm water discharges have the potential to reach area surface waters via municipal storm water system.

Associated pollutants include:

- Total Suspended Solids (TSS)
- Oil & Grease
- Metals
- Chlorine


Education:

- Notify public on conditions associated with charity car washes

Conditions:

- Contact Butte-Silver Bow Parks and Recreation department (Bob Lazzari, 406-533-8227) prior to organizing a charity car wash
- Locate on infiltrative surface, rather than on asphalt
- Locate a minimum of 300-ft from area surface waters (Silver Bow Creek, Blacktail Creek, Sand Creek, Basin Creek, & Grove Gulch Creek)
- BSBPW department will provide BMPs (i.e., inlet protection devices) at no charge

Appendix D
Outfall Maps

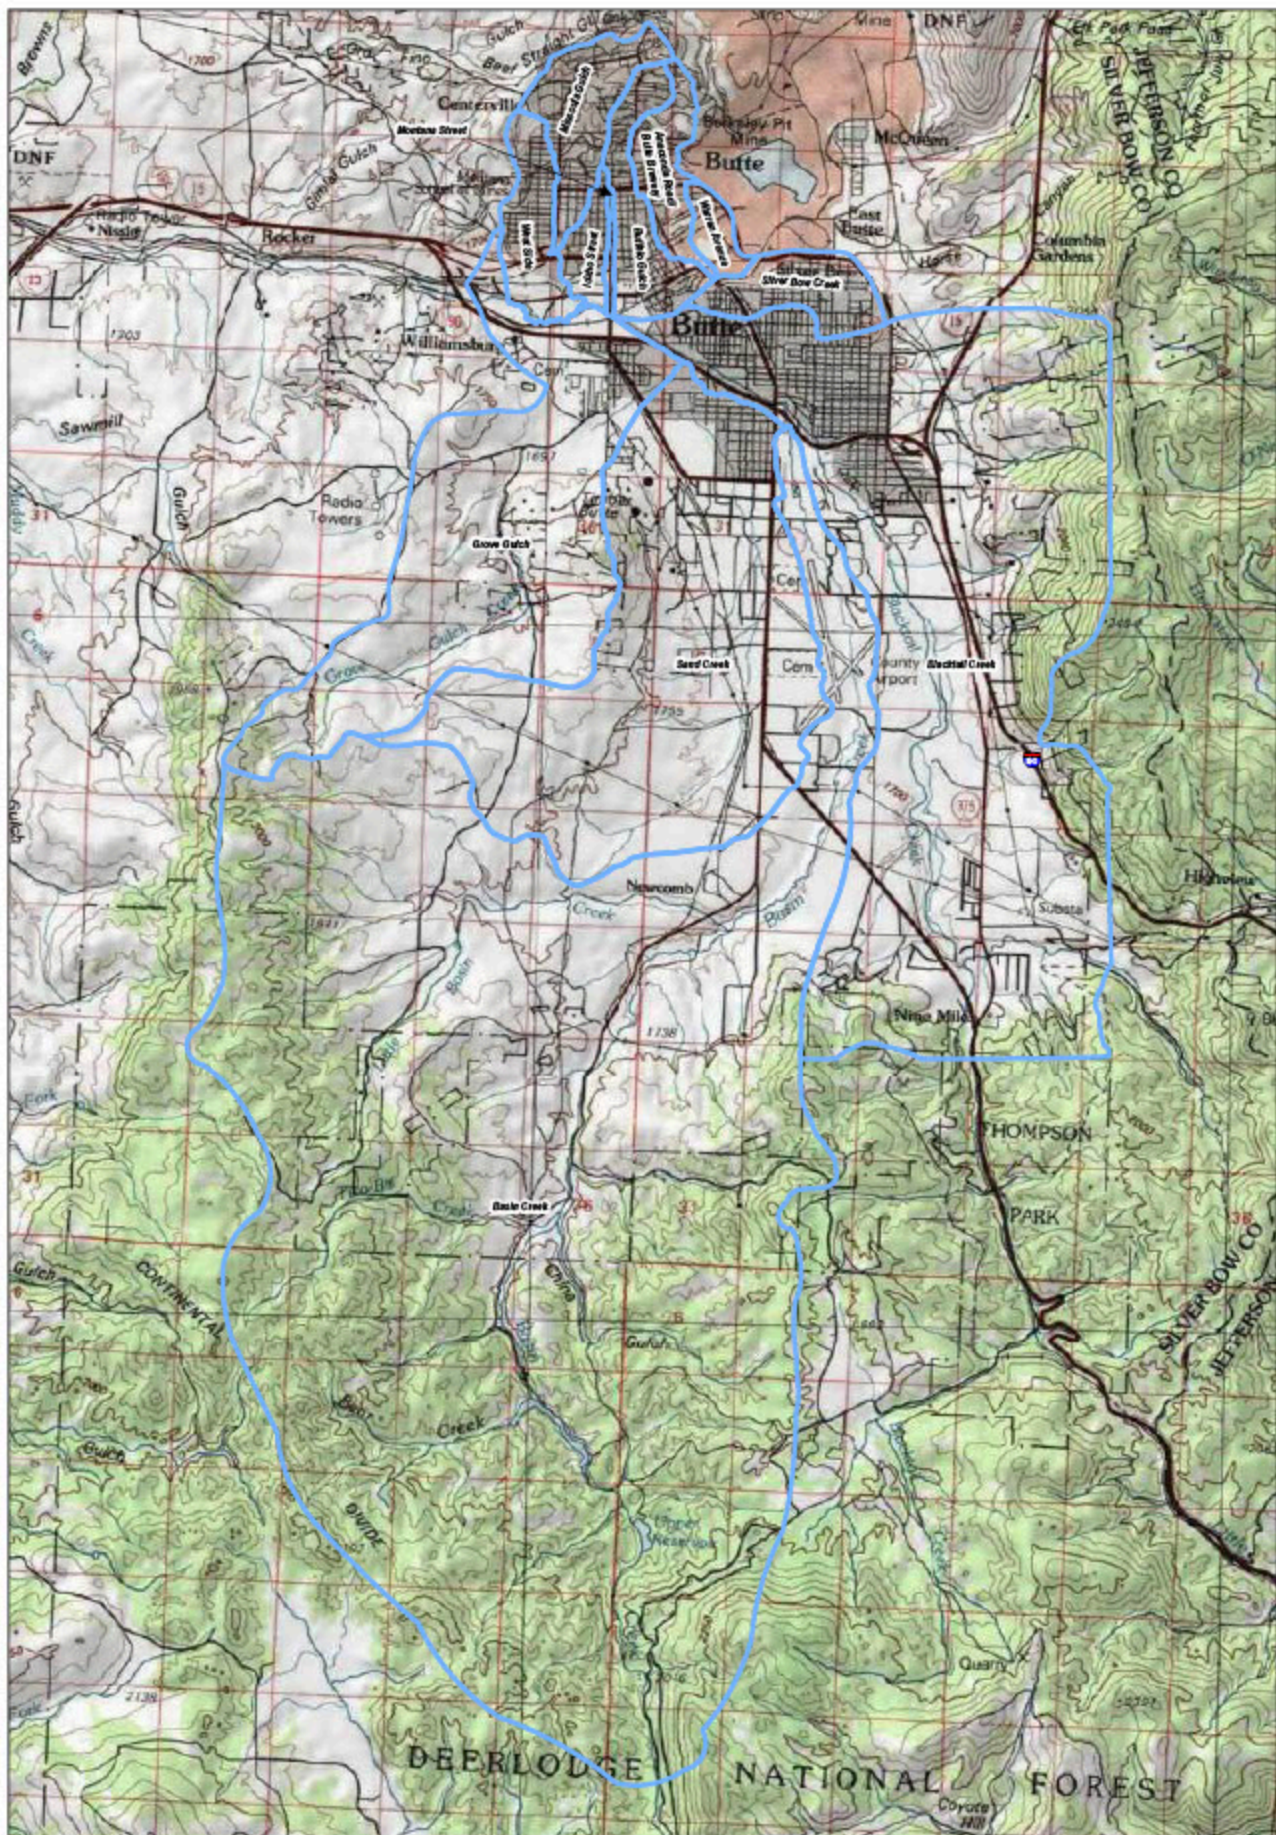

Legend

Drainage Basin



Miles
0 0.5 1 2



INDEX MAP



City of Butte MS4 Boundary

Job: 026PAM41 TS

Date: 1/24/2019

File: 026PAM41_0100.dwg User: jacob.m.ahern

FIGURE 1

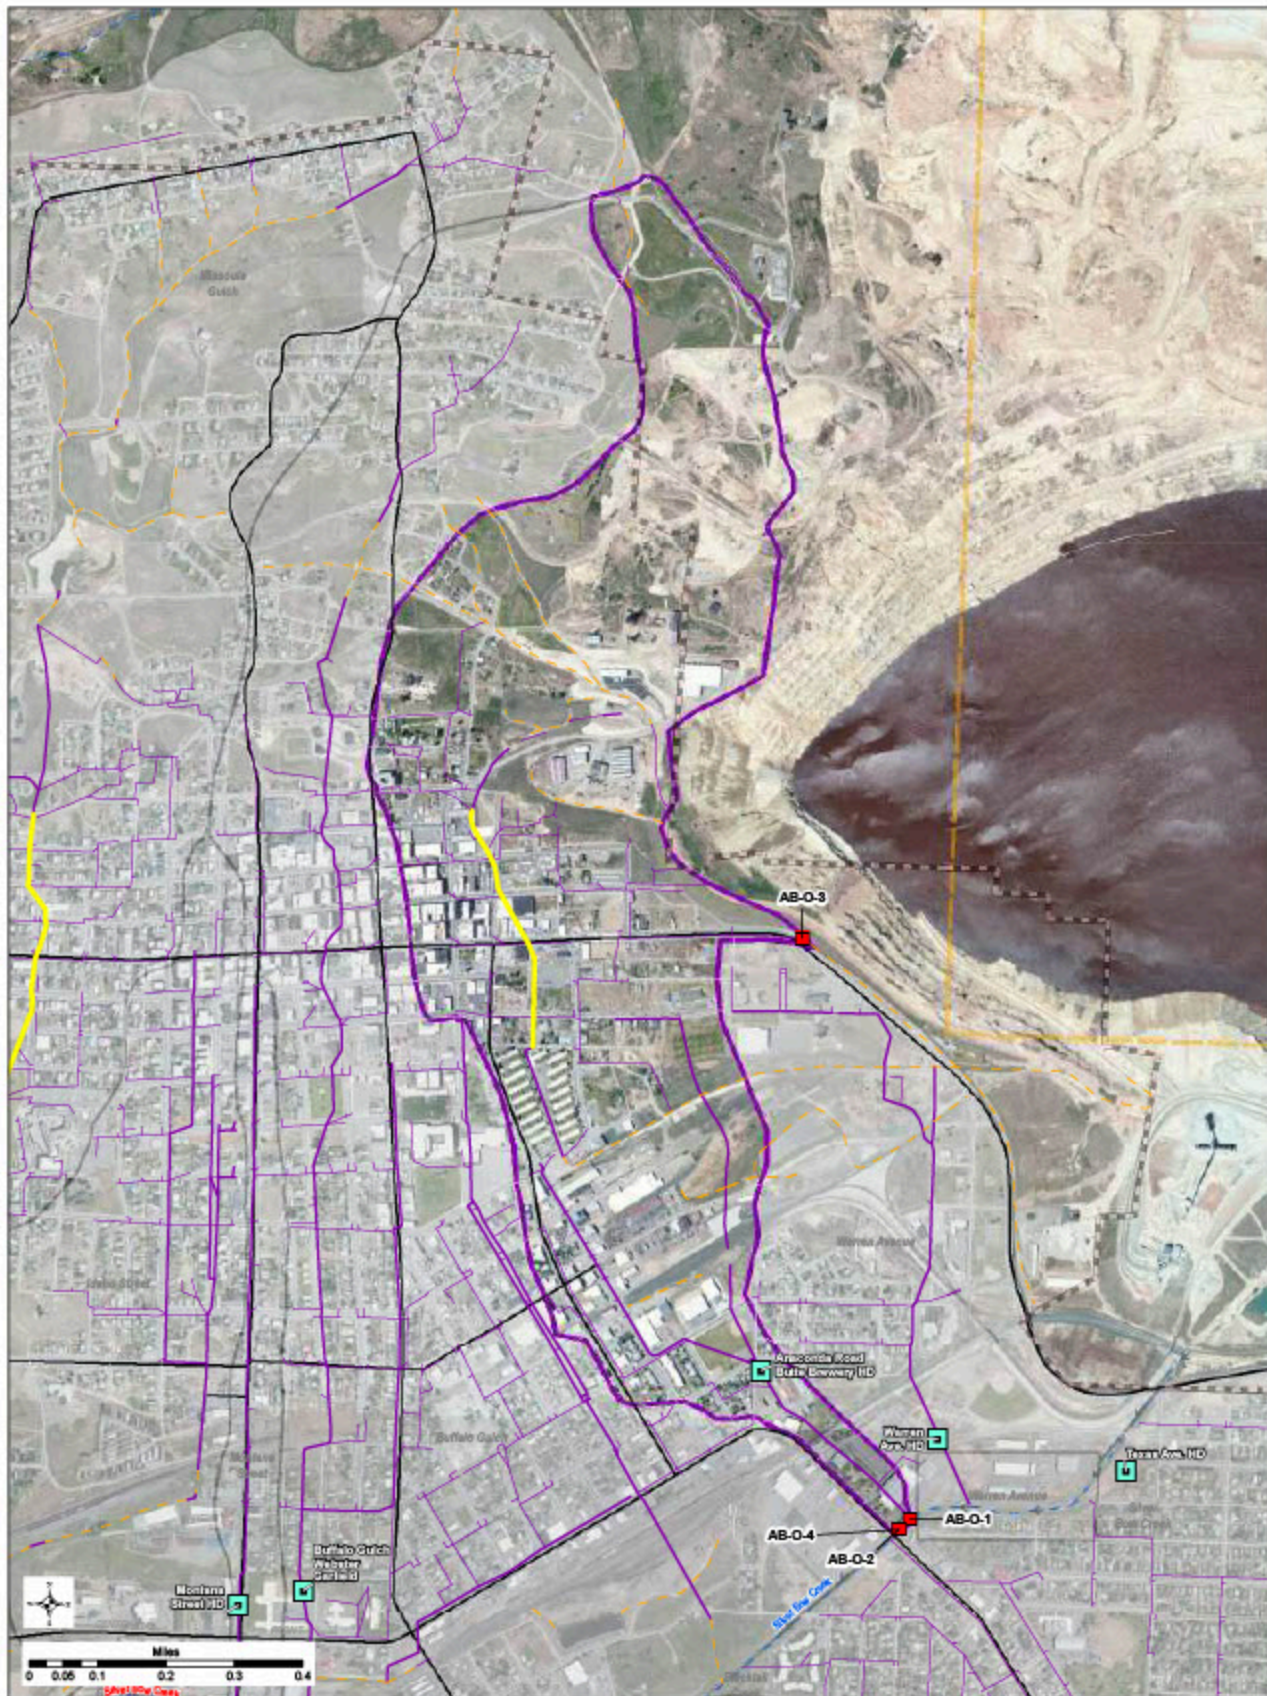

Anaconda Road/Butte Brewery


City of Butte
MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/26/2019

Prepared by: WET, LLC, 1000 N. 1st Street, Butte, MT 59701

FIGURE 3a

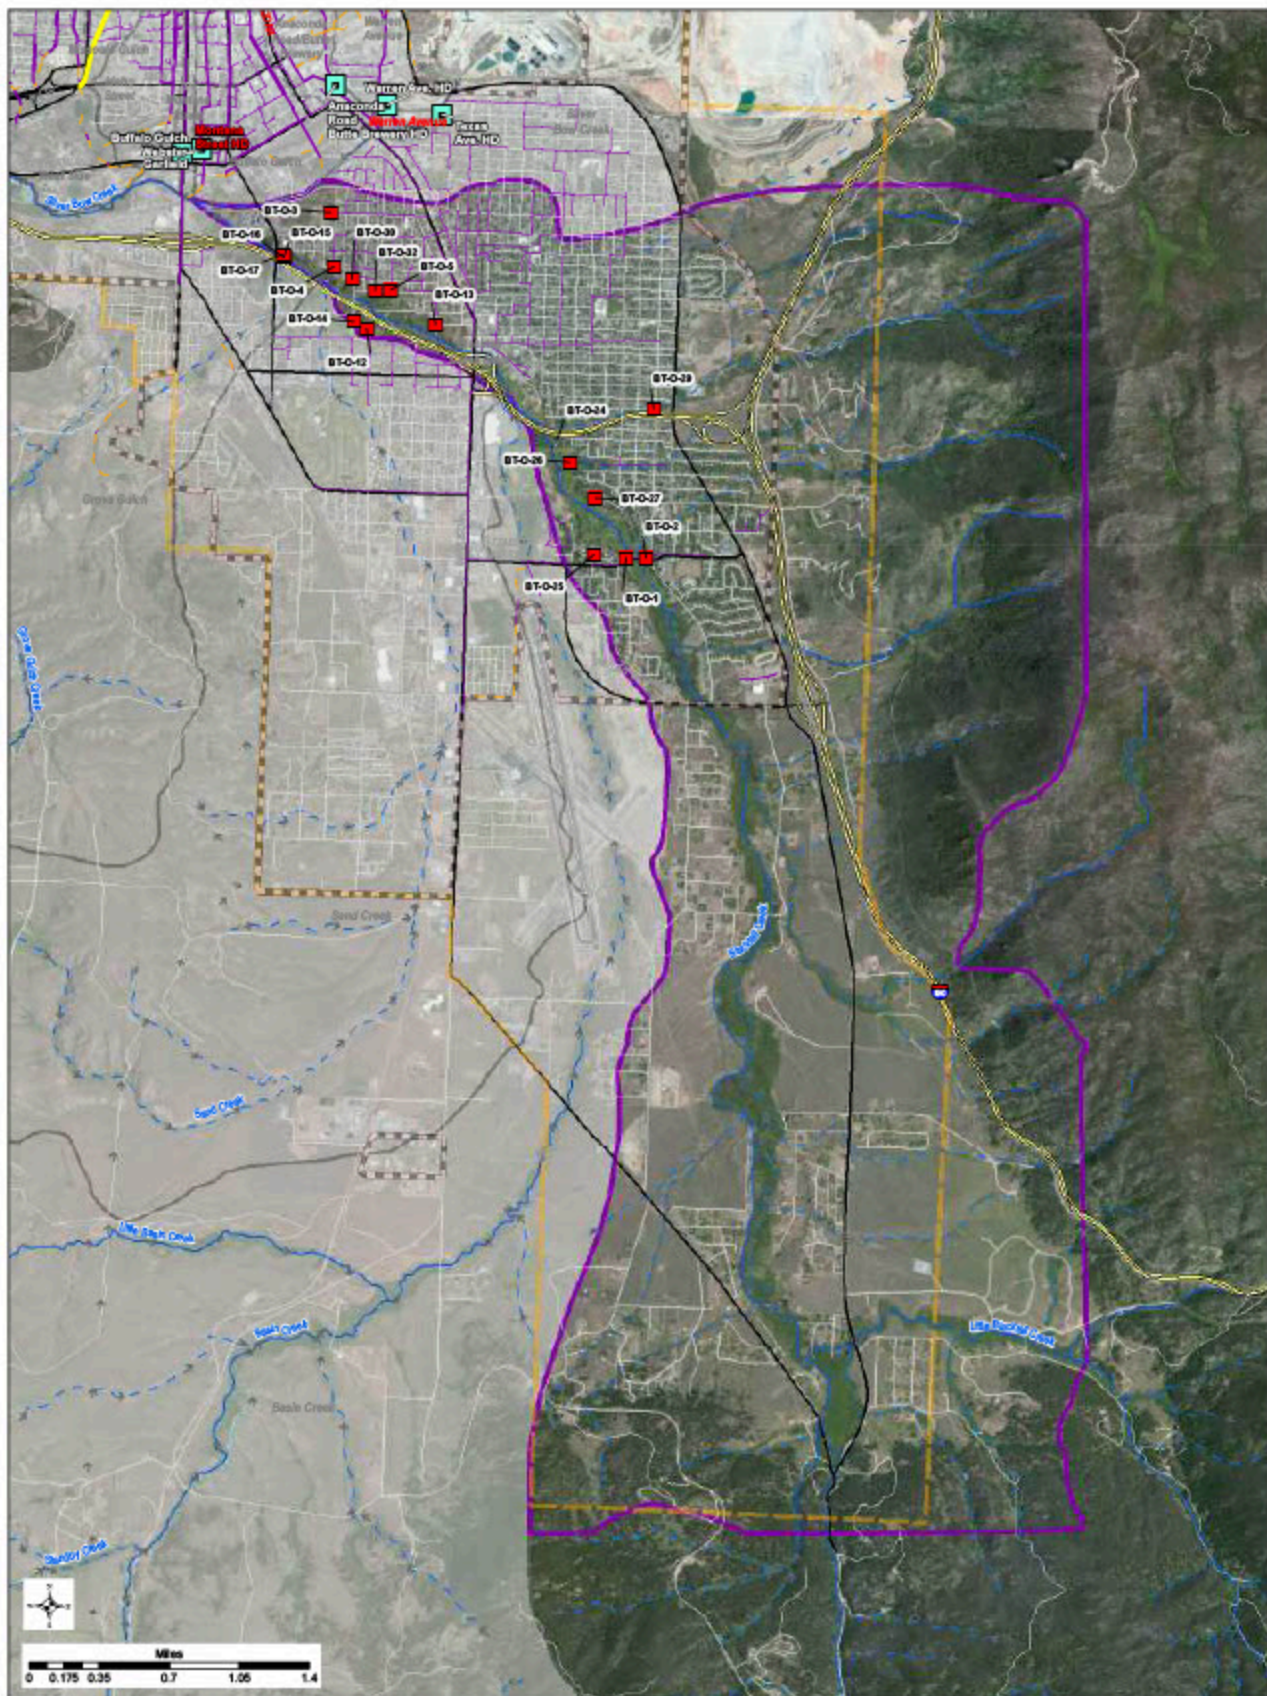

Blacktail Creek


City of Butte
MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/28/2019

Prepared by: WET, Inc. / City of Butte, Montana

FIGURE 3c

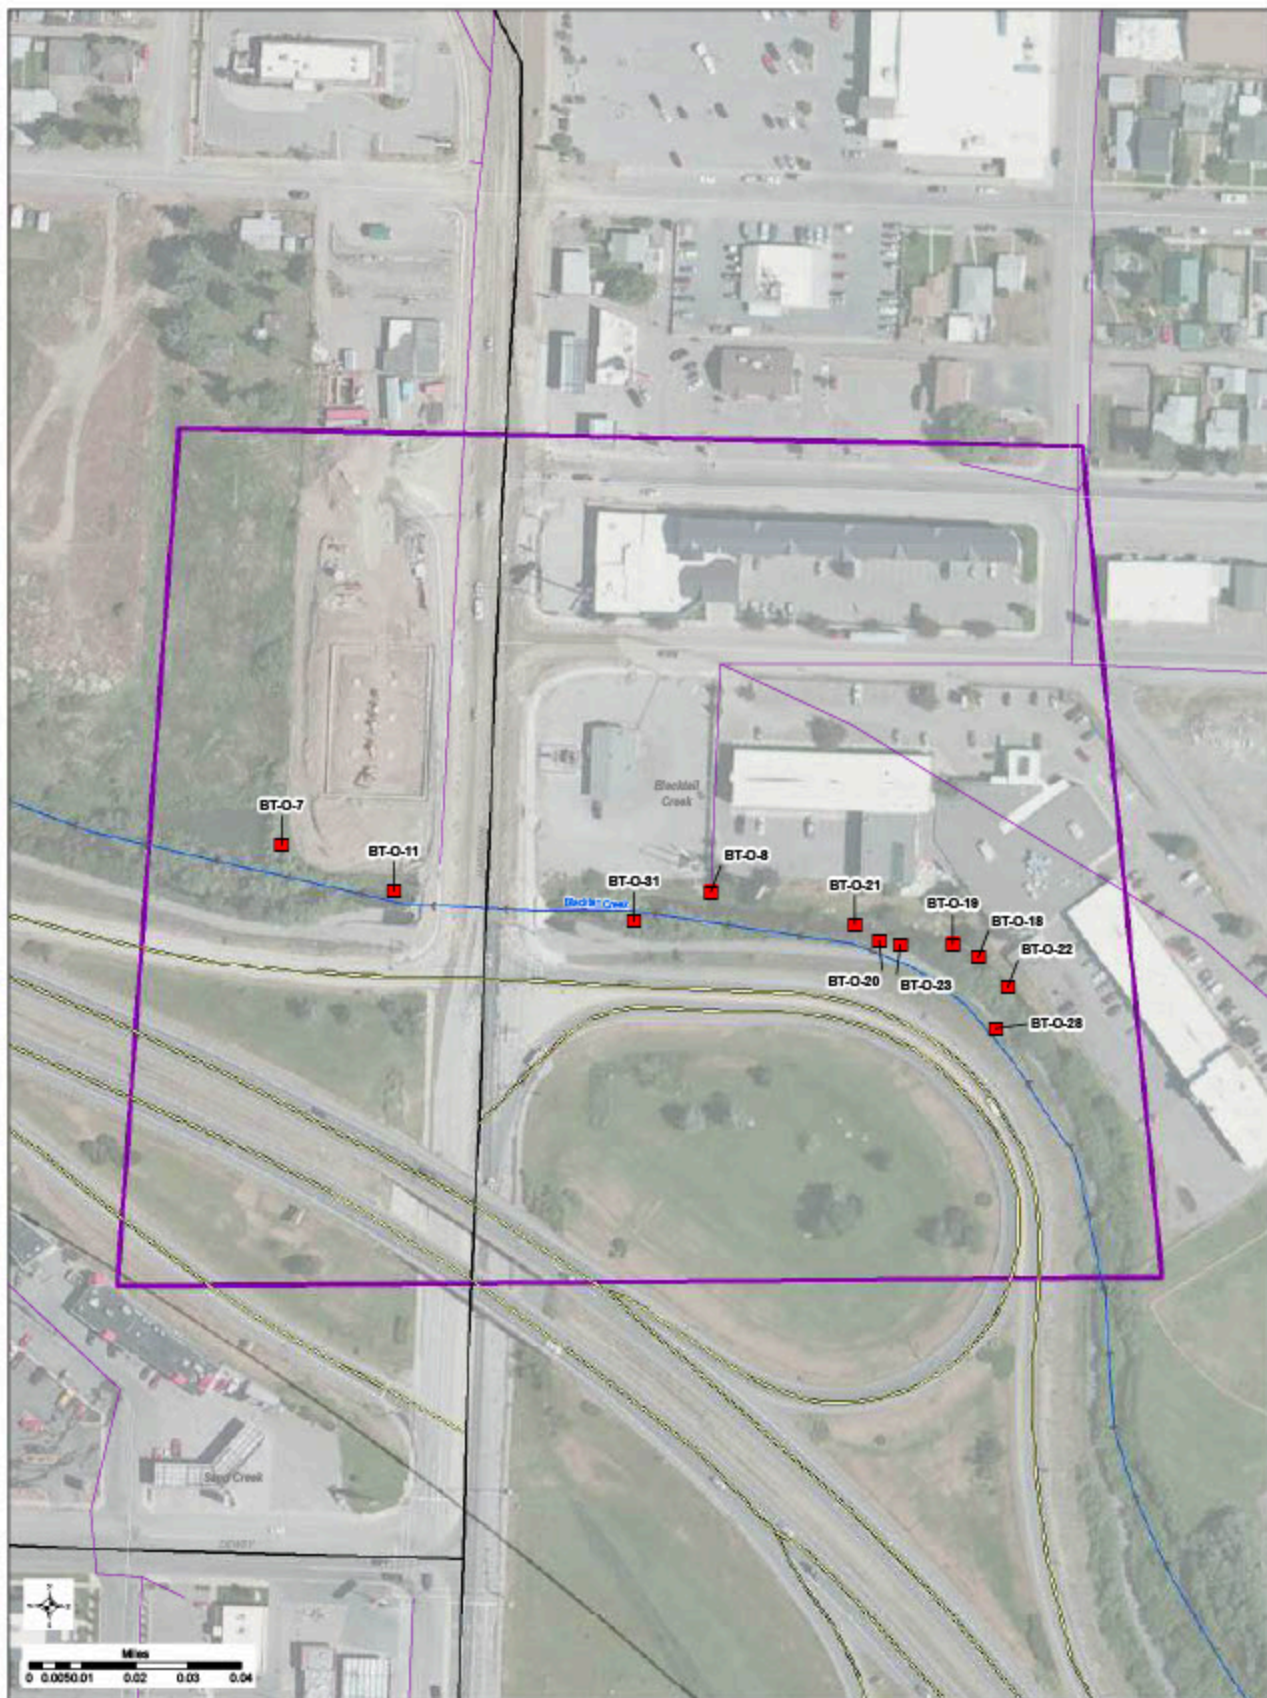

Blacktail Creek Inset


City of Butte
MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/28/2019

Prepared by: J. Smith, J. Smith, J. Smith, J. Smith


FIGURE 3c1

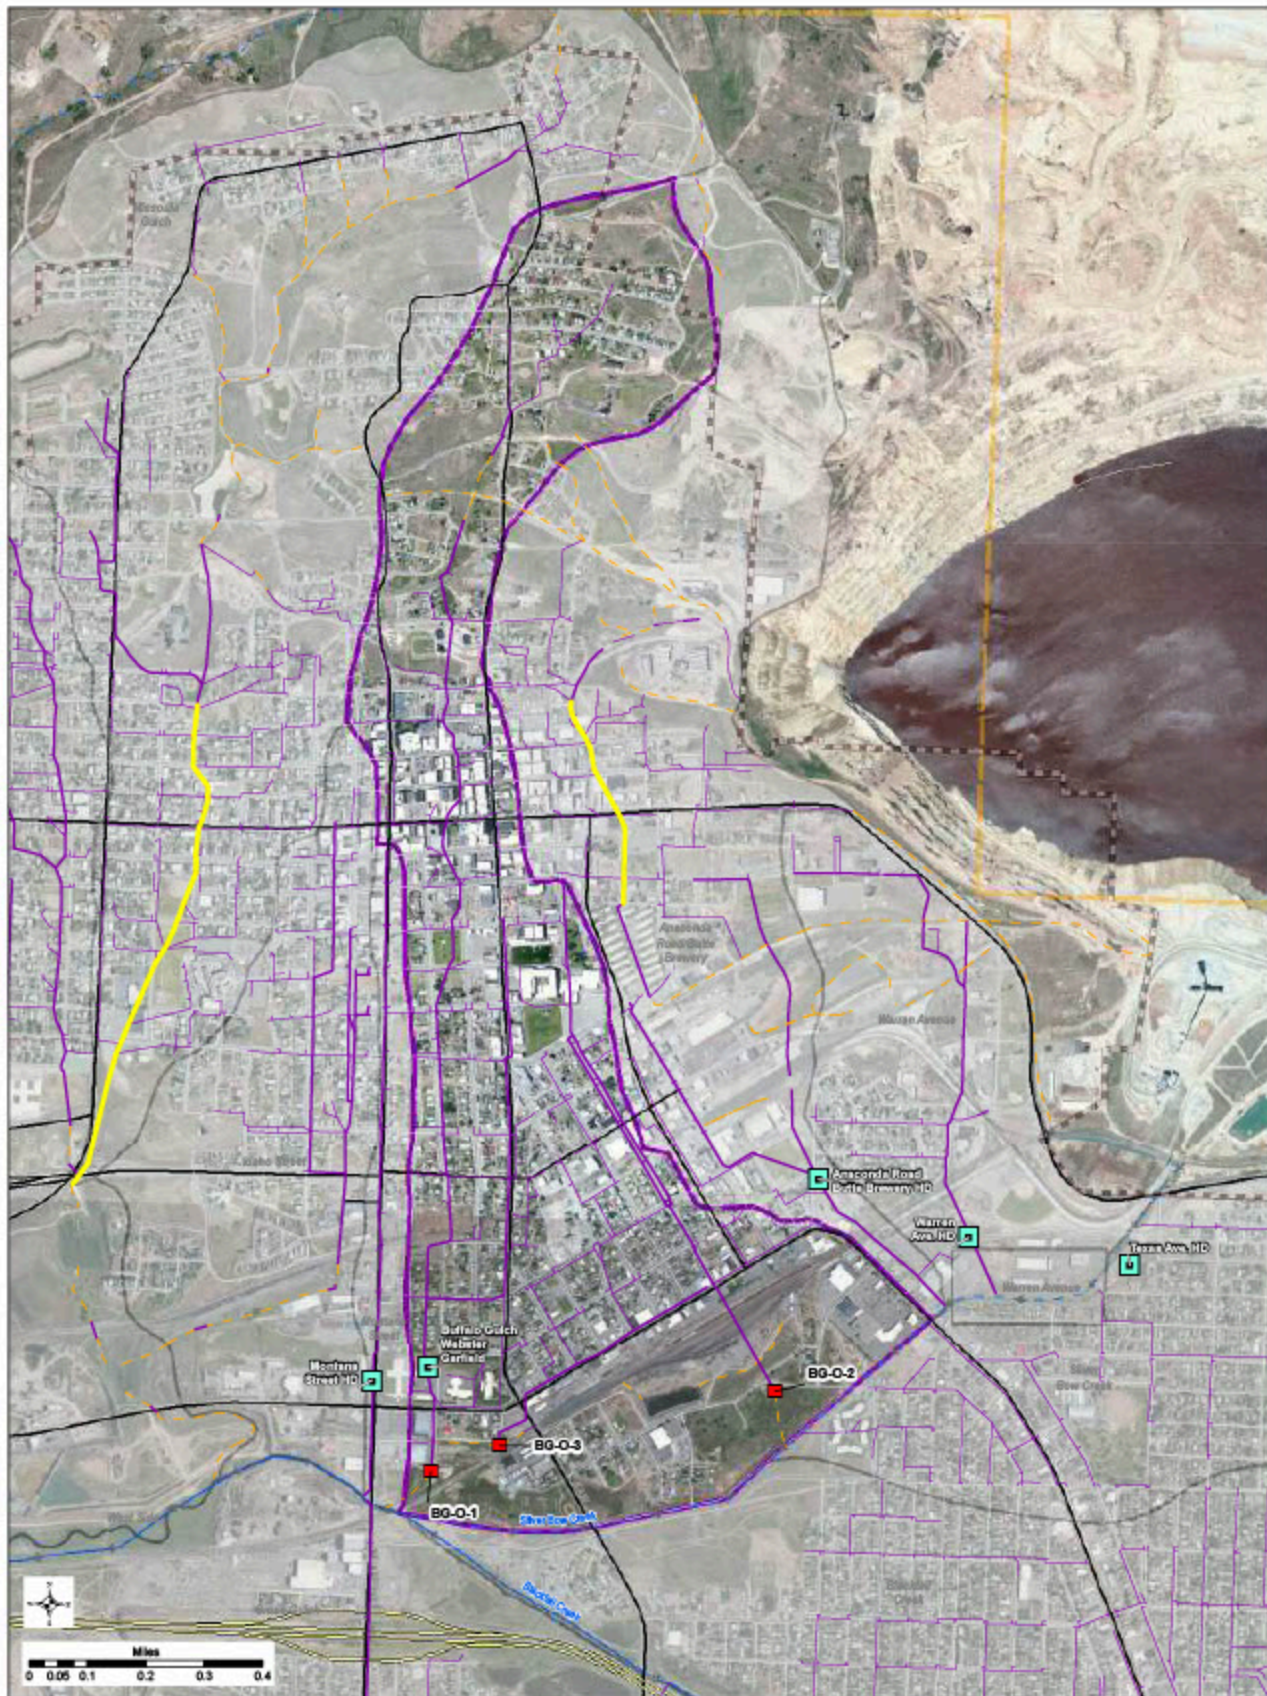

Buffalo Gulch **City of Butte** **MS4 Boundary - USGS**

Job#: 026PAM41 T5
 Date: 1/26/2019
 File: 026PAM41_T5.dwg

FIGURE 3d

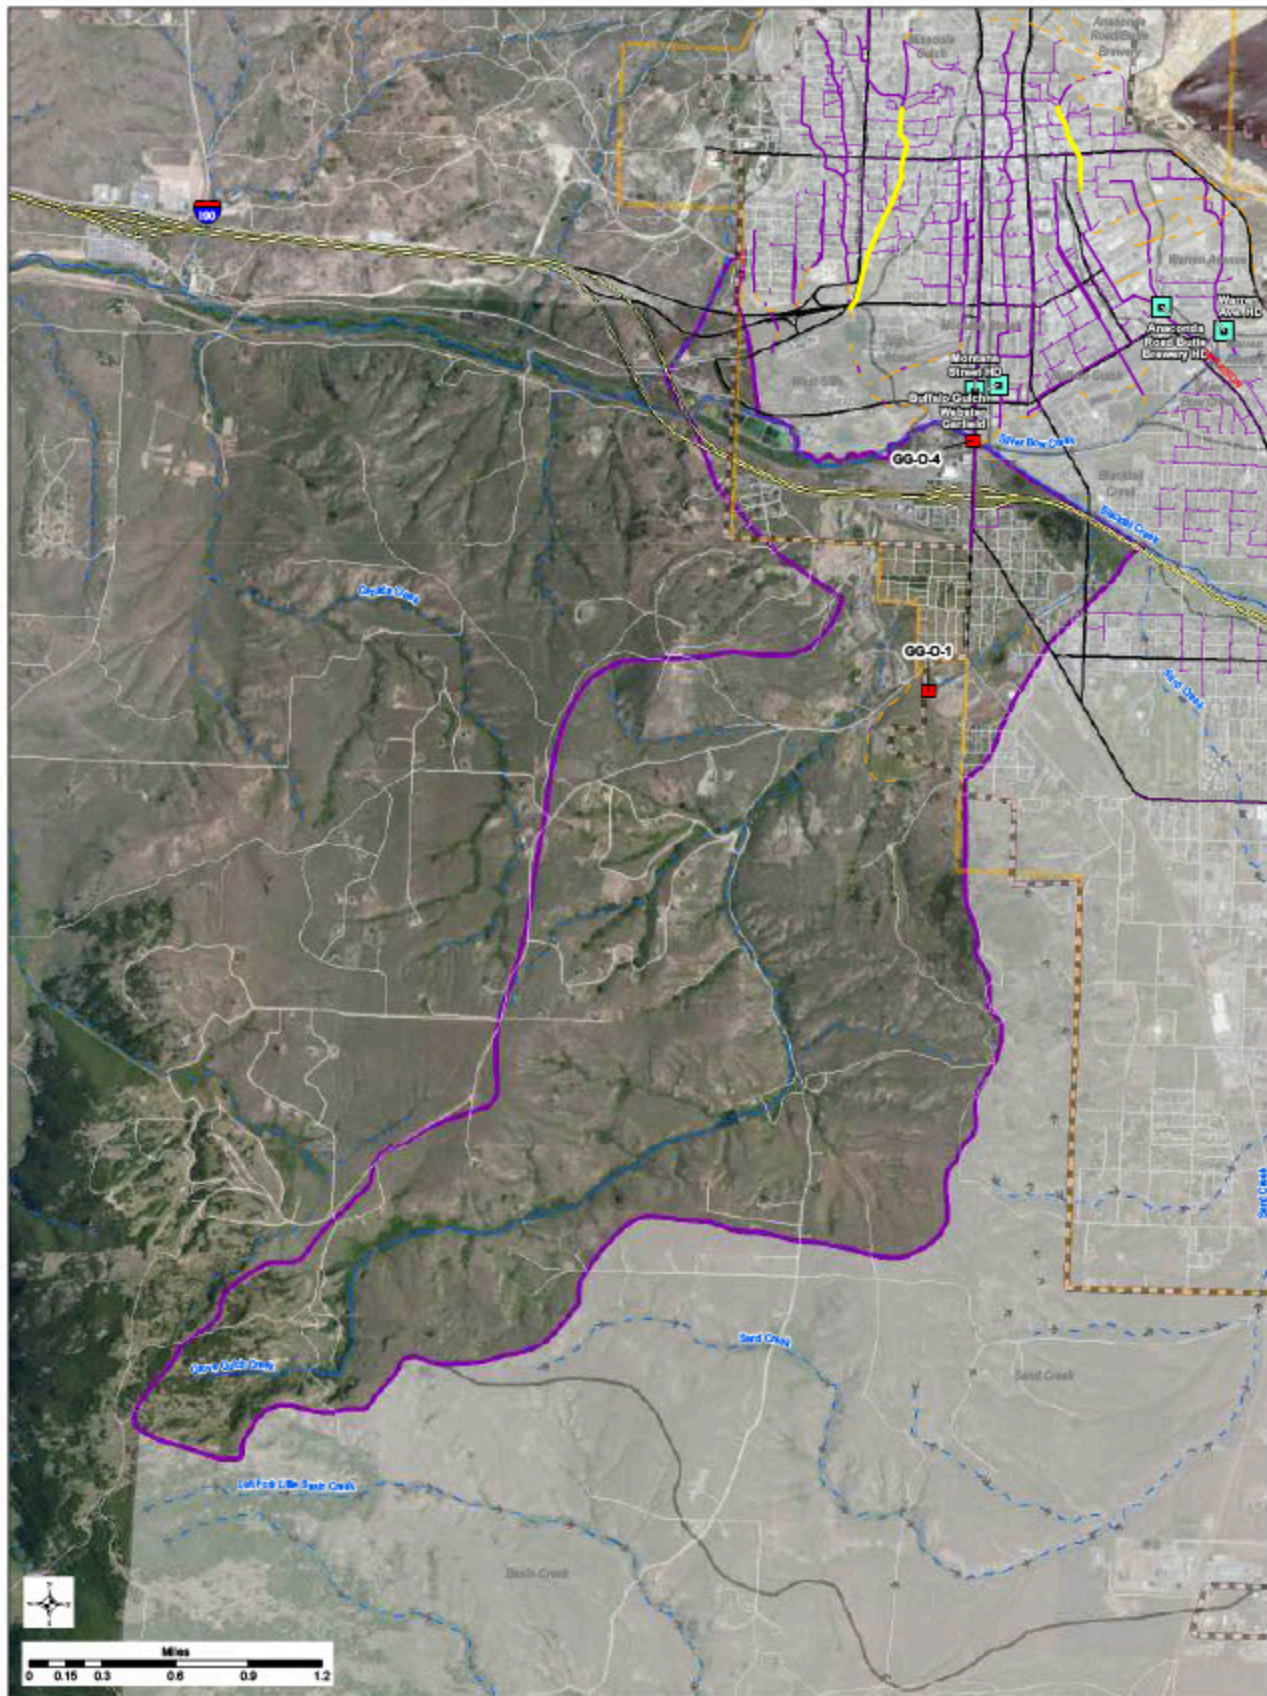

Grove Gulch


City of Butte
MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/26/2019

Prep: 026PAM41 T5, 026PAM41 T5, 026PAM41 T5

FIGURE 3e

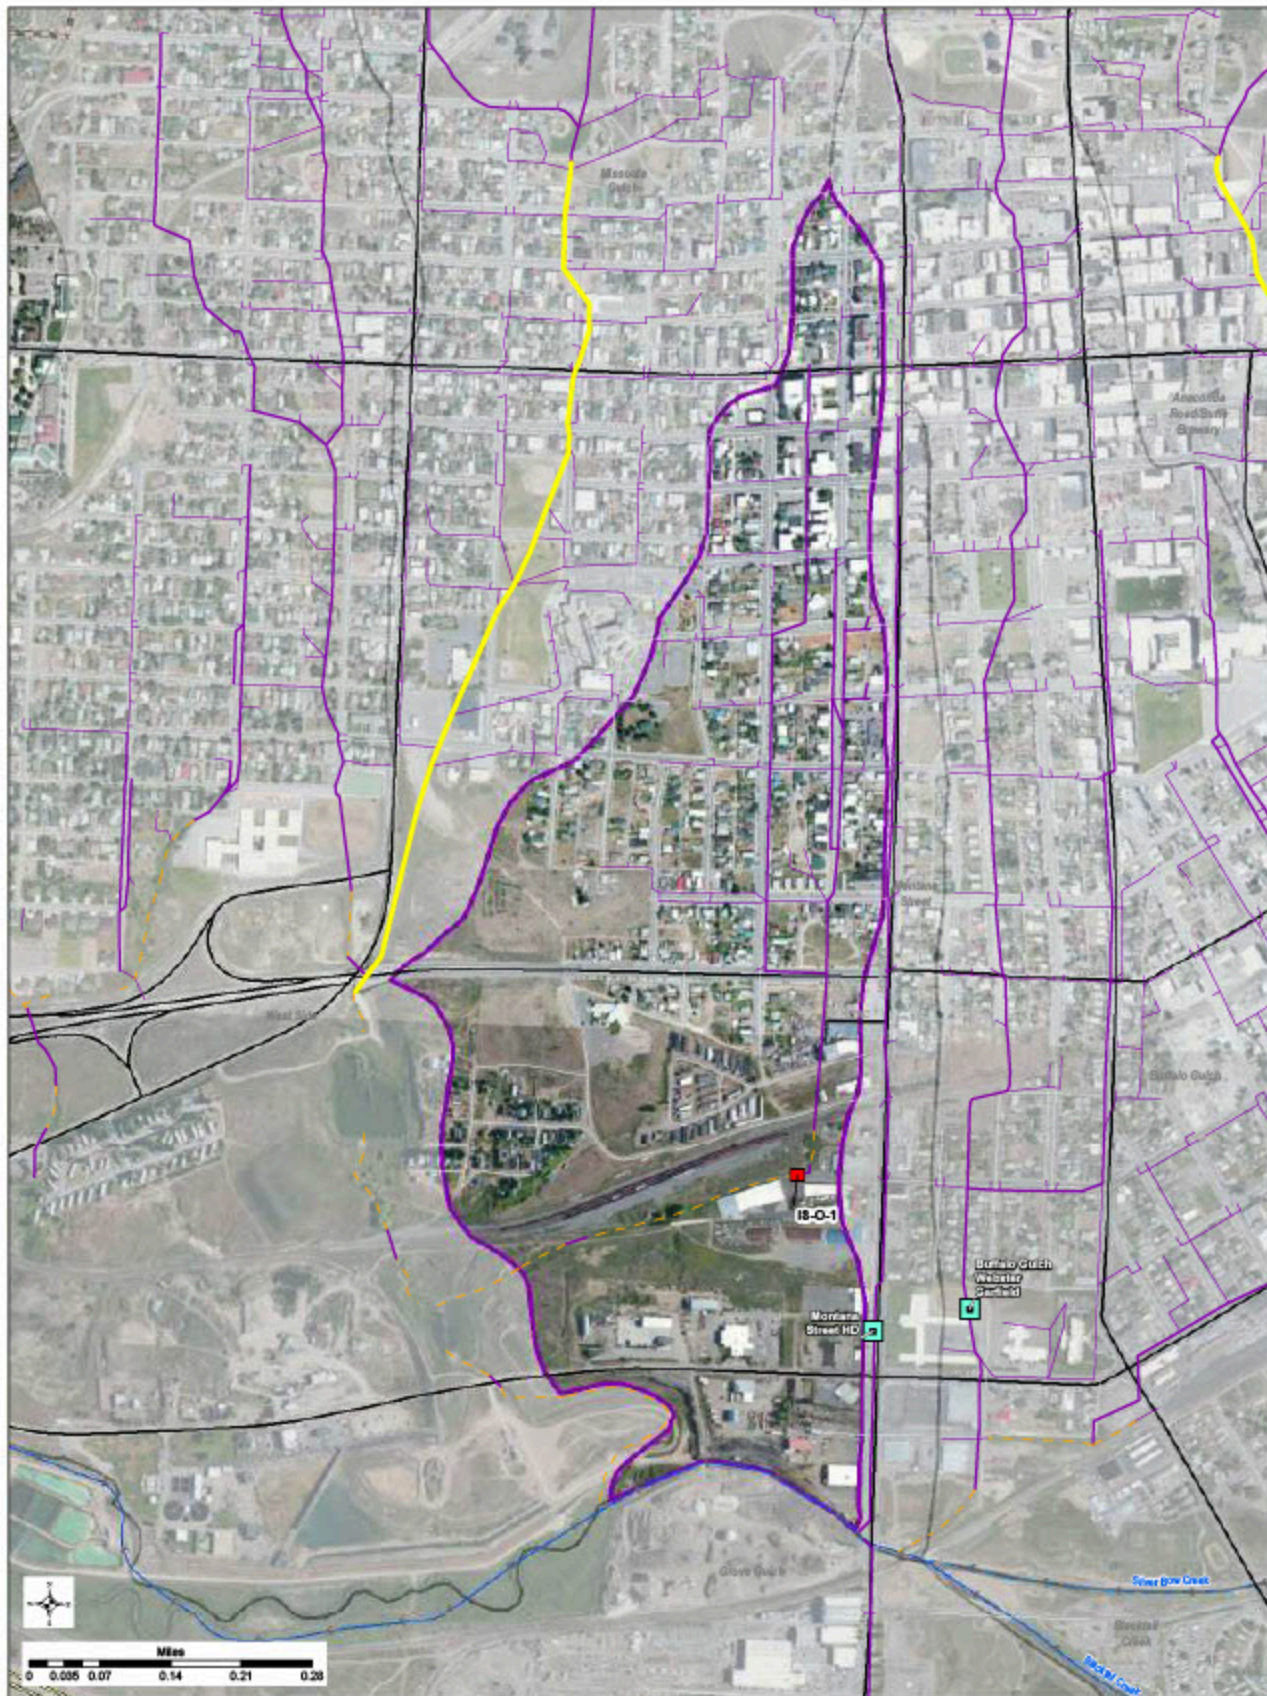



Idaho Street
City of Butte
MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/28/2019

Prepared by: WET, 2019, Boise River, Idaho

FIGURE 3f

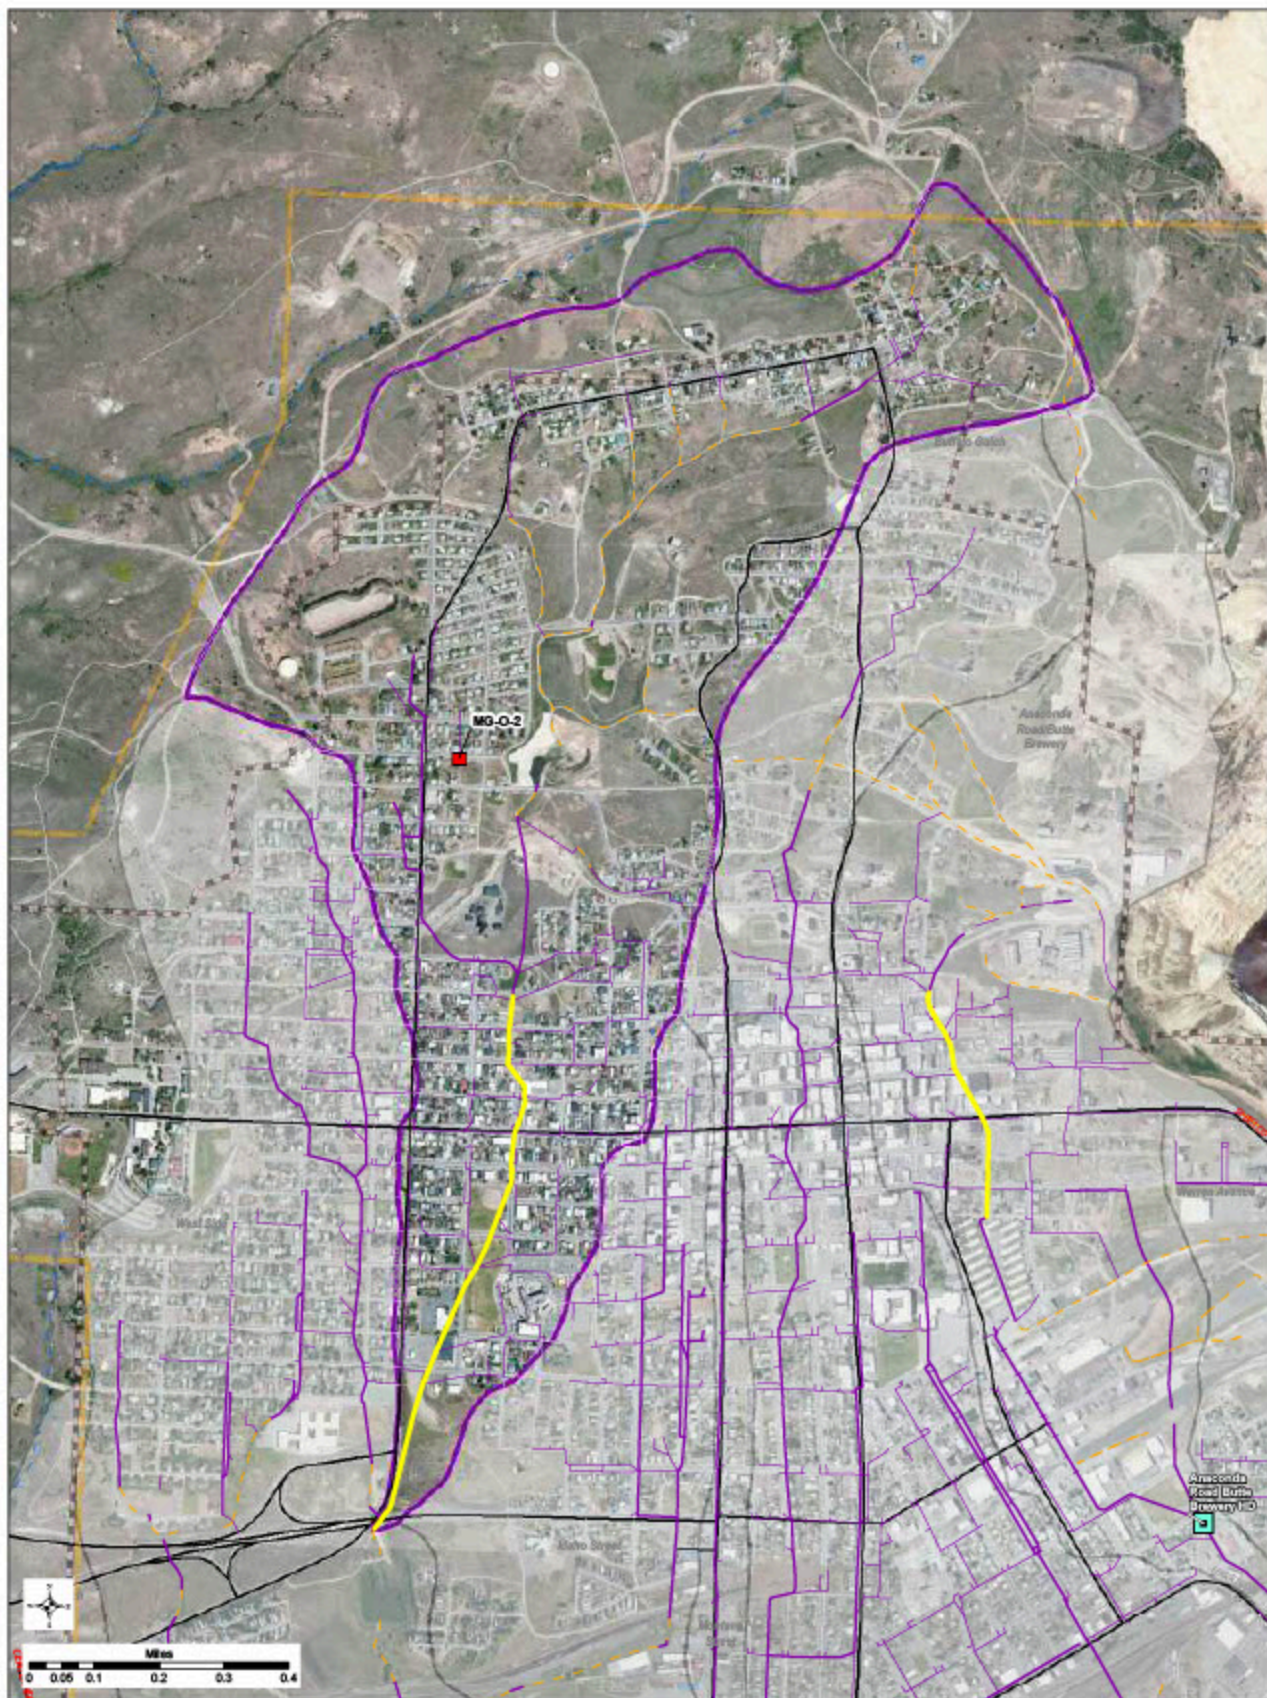



Missoula Gulch
 City of Butte
 MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/26/2019

Pre: 026PAM41 T5, 026PAM41 T5, 026PAM41 T5

FIGURE 3g

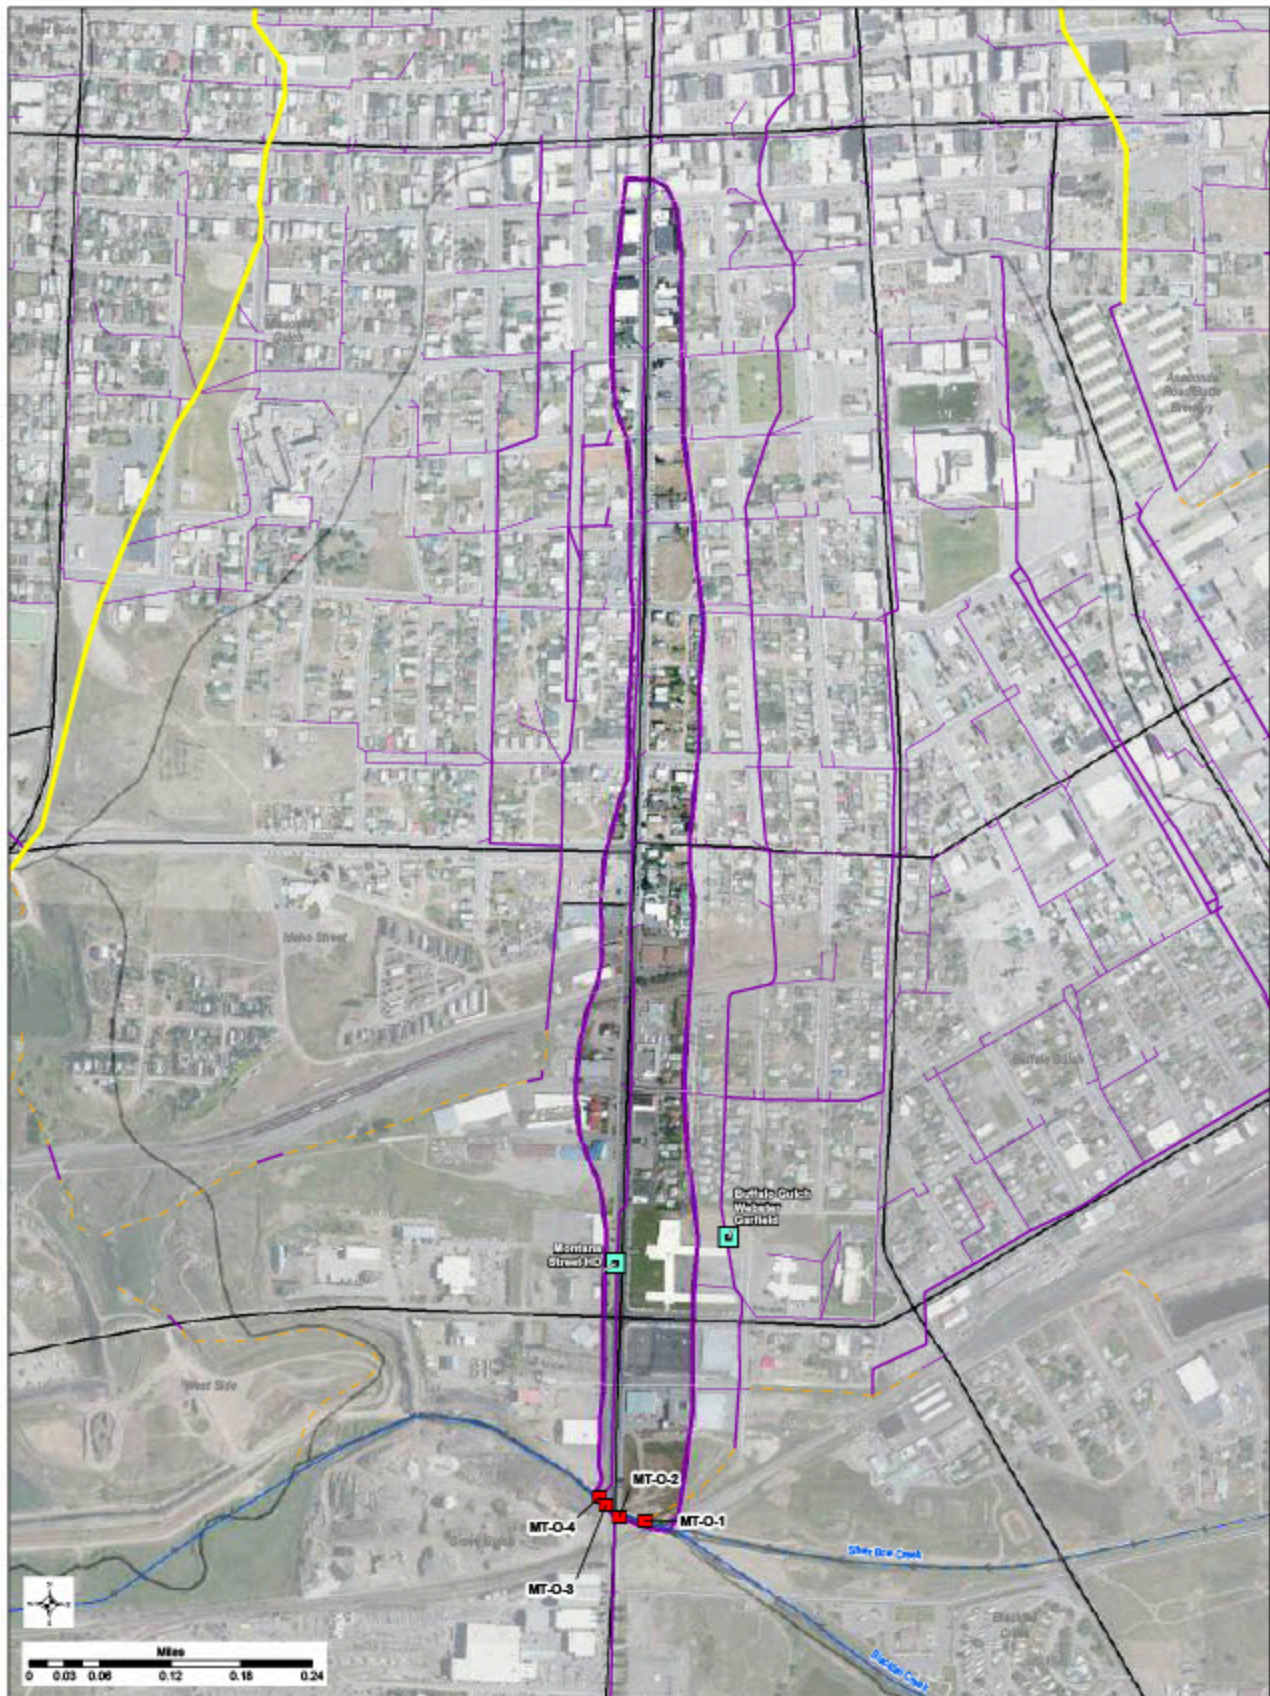


Montana Street
 City of Butte
 MS4 Boundary - USGS

Job#: 02SEP2014 15

Date: 1/28/2019

Prepared by: WET, LLC, 1000 N. 1st Street, Butte, MT 59701

FIGURE 3h

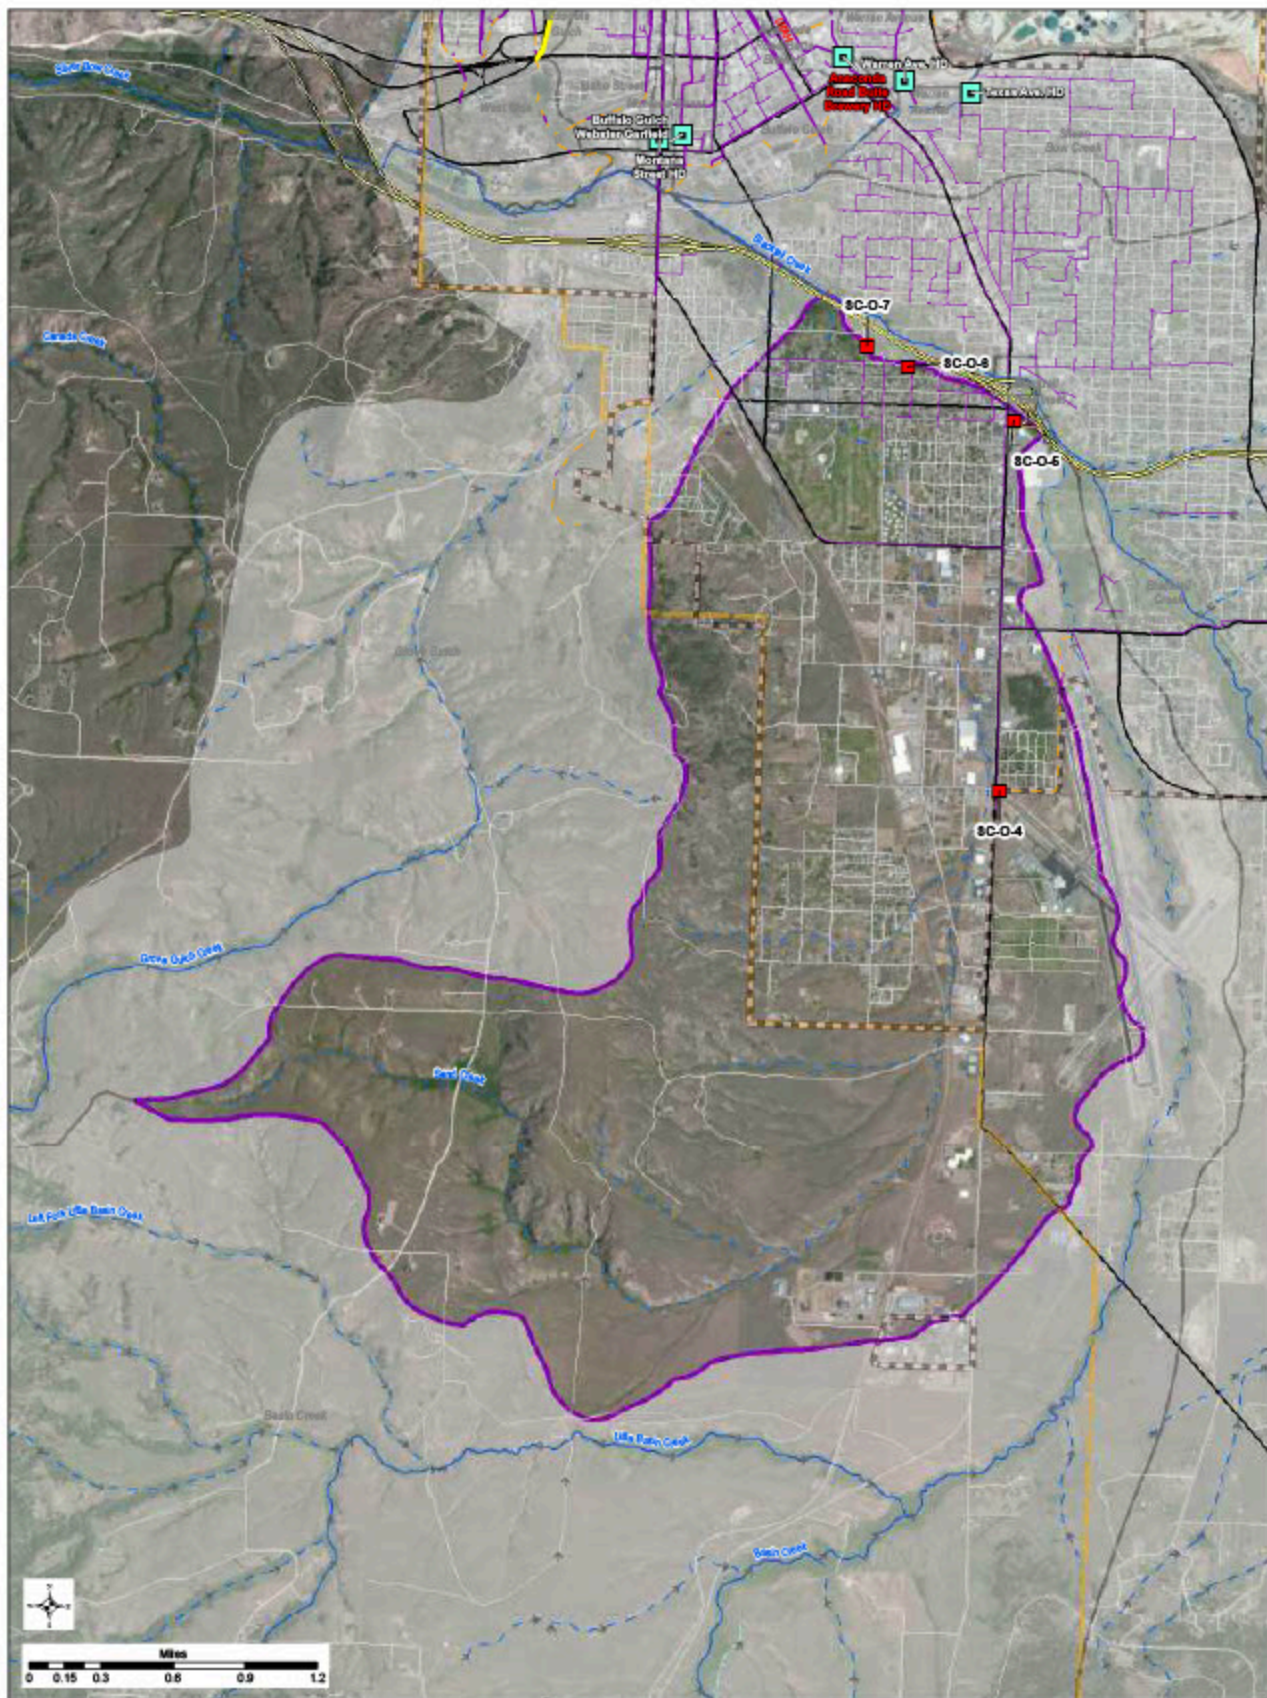

Sand Creek


City of Butte
MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/28/2019

Prepared by: WET, Inc. / J. R. Smith, P.E.

FIGURE 3i

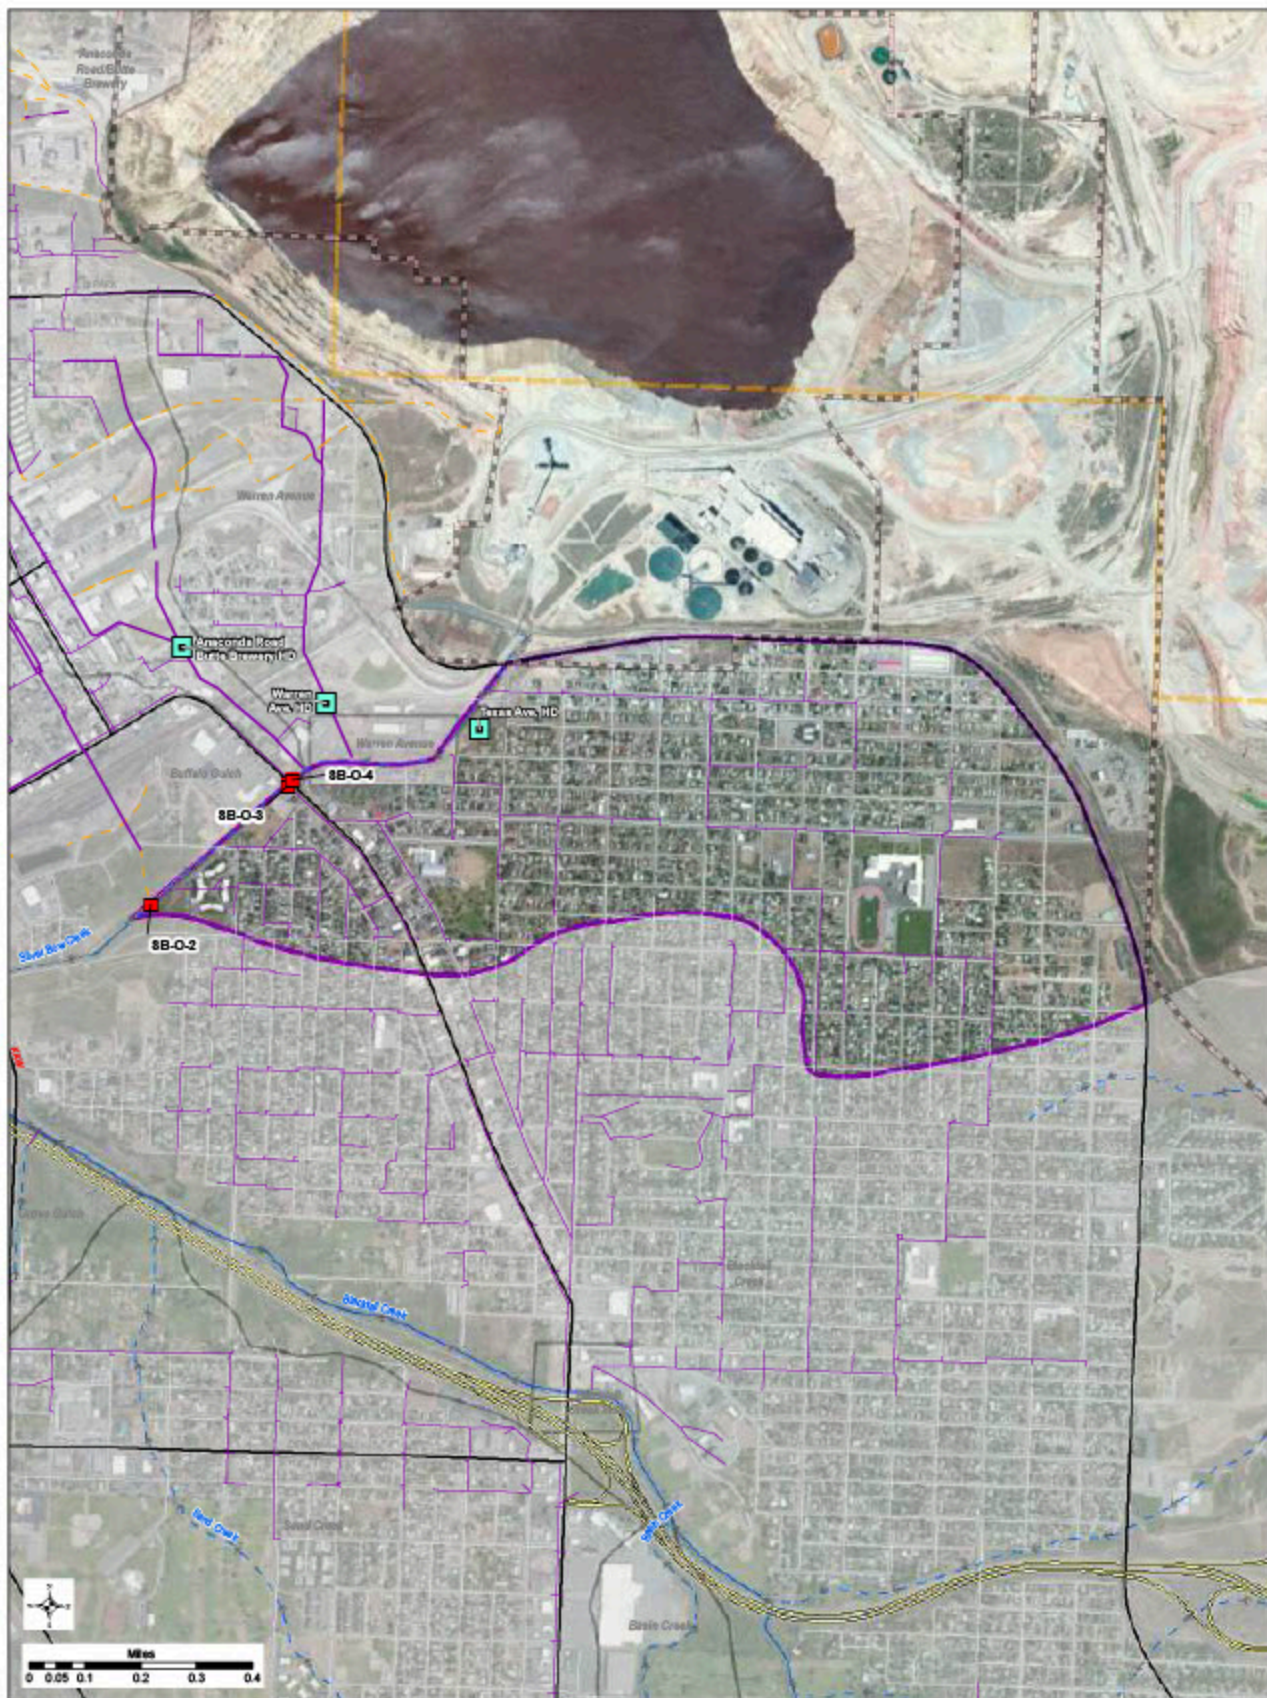

Silver Bow Creek

City of Butte
MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/28/2019

Prepared by: WET, Inc. / Butte, Montana

FIGURE 3j




Warren Avenue
 City of Butte
 MS4 Boundary - USGS

Job#: 026PAM41 T5

Date: 1/28/2019

Prepared by: WET, LLC
 Drawn by: WET, LLC

FIGURE 3k

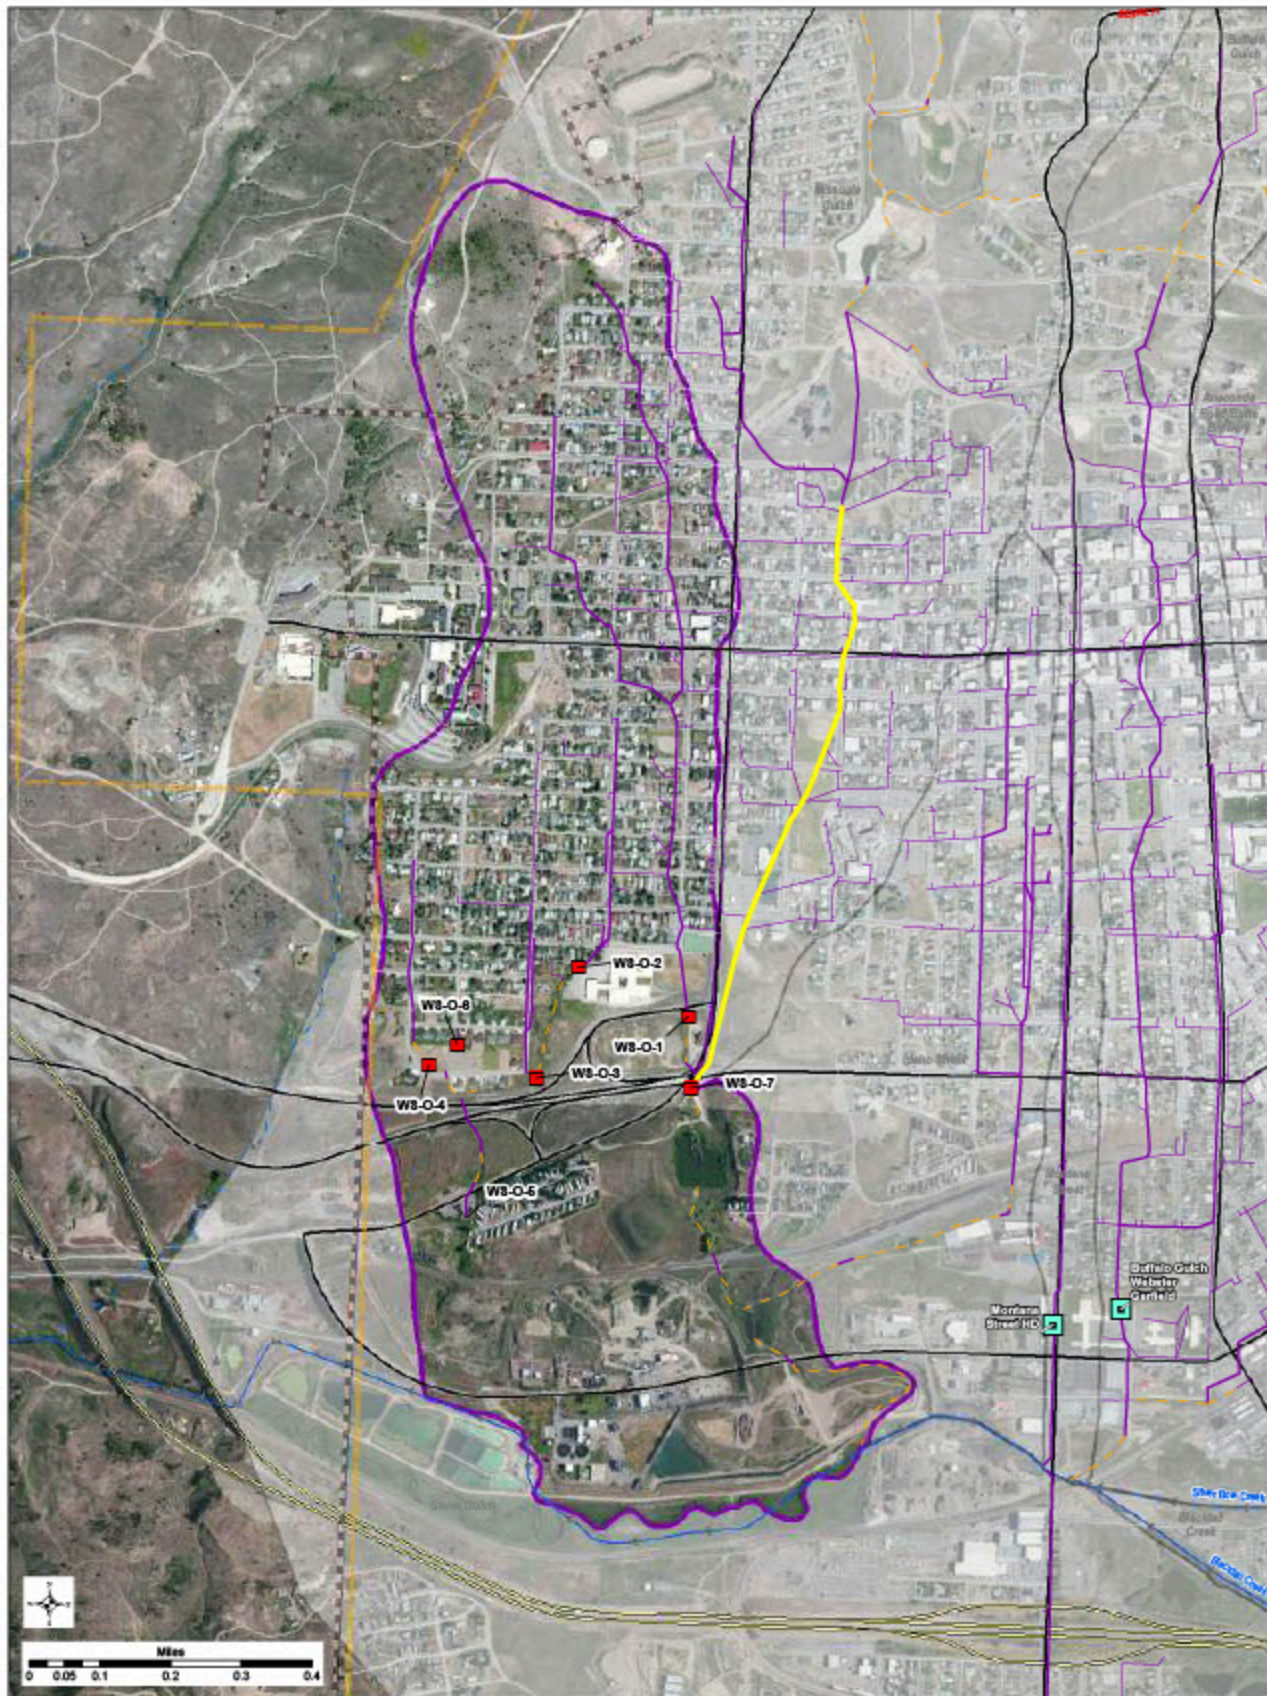

West Side	
City of Butte	
MS4 Boundary - USGS	
Job#: 026PAM41 T5	FIGURE 31
Date: 1/28/2019	
File: 026PAM41_T5_01.dwg, 026PAM41_T5_02.dwg, 026PAM41_T5_03.dwg	



**BUTTE SILVER BOW
MS4-AREA**


BPSOU Ponds and Features

Job#: BSBPMM41

Date: 2/17/2022

Figure3m

Copyright 2022 WET Water & Environmental Technologies, Inc. All rights reserved.

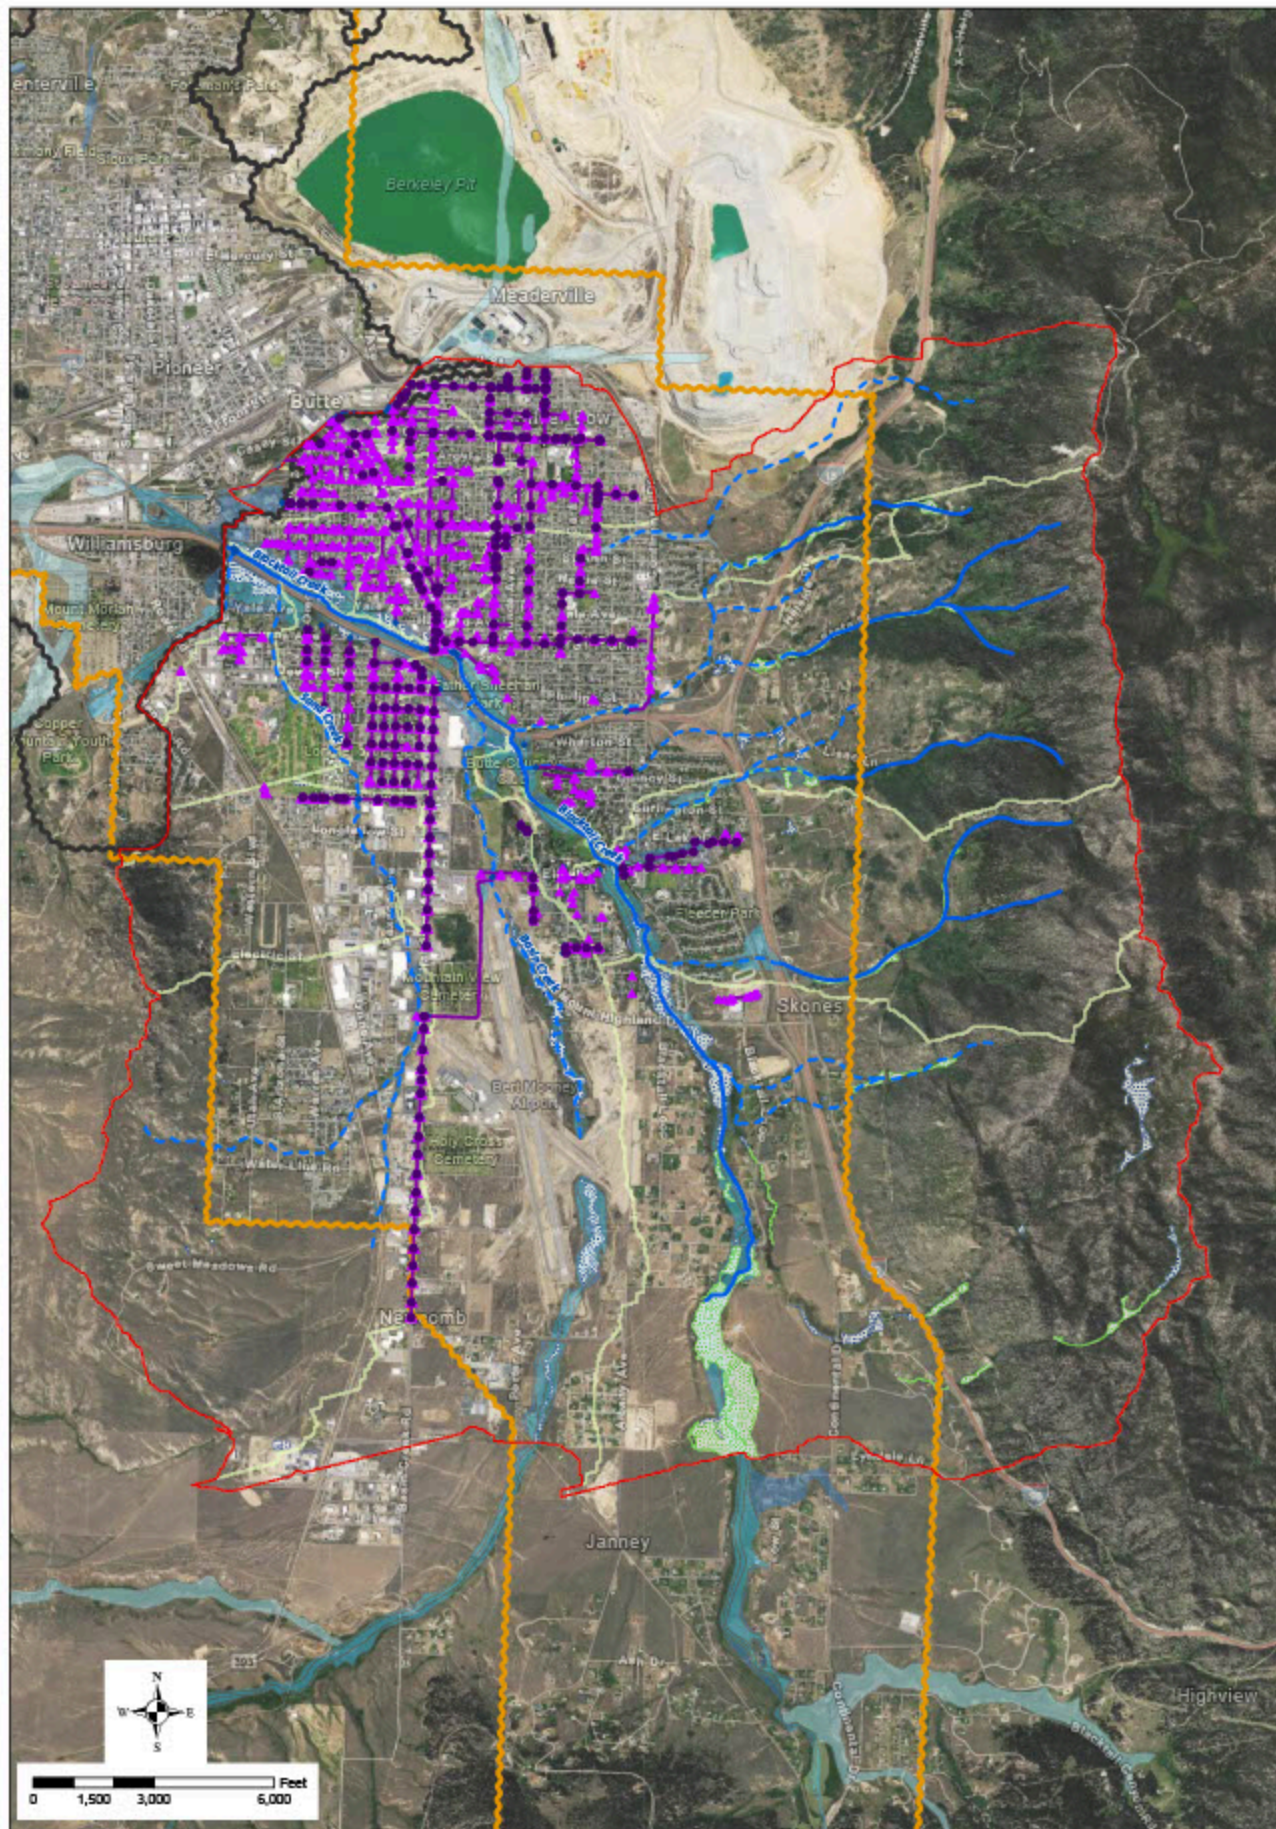

- Inlet
- Manhole
- Outlet
- Stormwater Line
- Perennial Stream
- Intermittent Stream

- ▭ Flats Master Plan Study Area
- FLOOD ZONE**
- 0.2 PCT ANNUAL CHANCE FLOOD HAZARD
- A
- AE
- AO

- WETLANDS**
- ▭ Freshwater Wetland
- ▭ Riparian Wetland



**BUTTE SILVER BOW
MS4-AREA**


Hydrology, Wetlands and Floodplain

Job#: EGDPM41

Date: 2/17/2022

Figure 3n

01010117-MapPlan-01a Wetland Map of Flooded Area Map 01010117_Map 01a.pdf

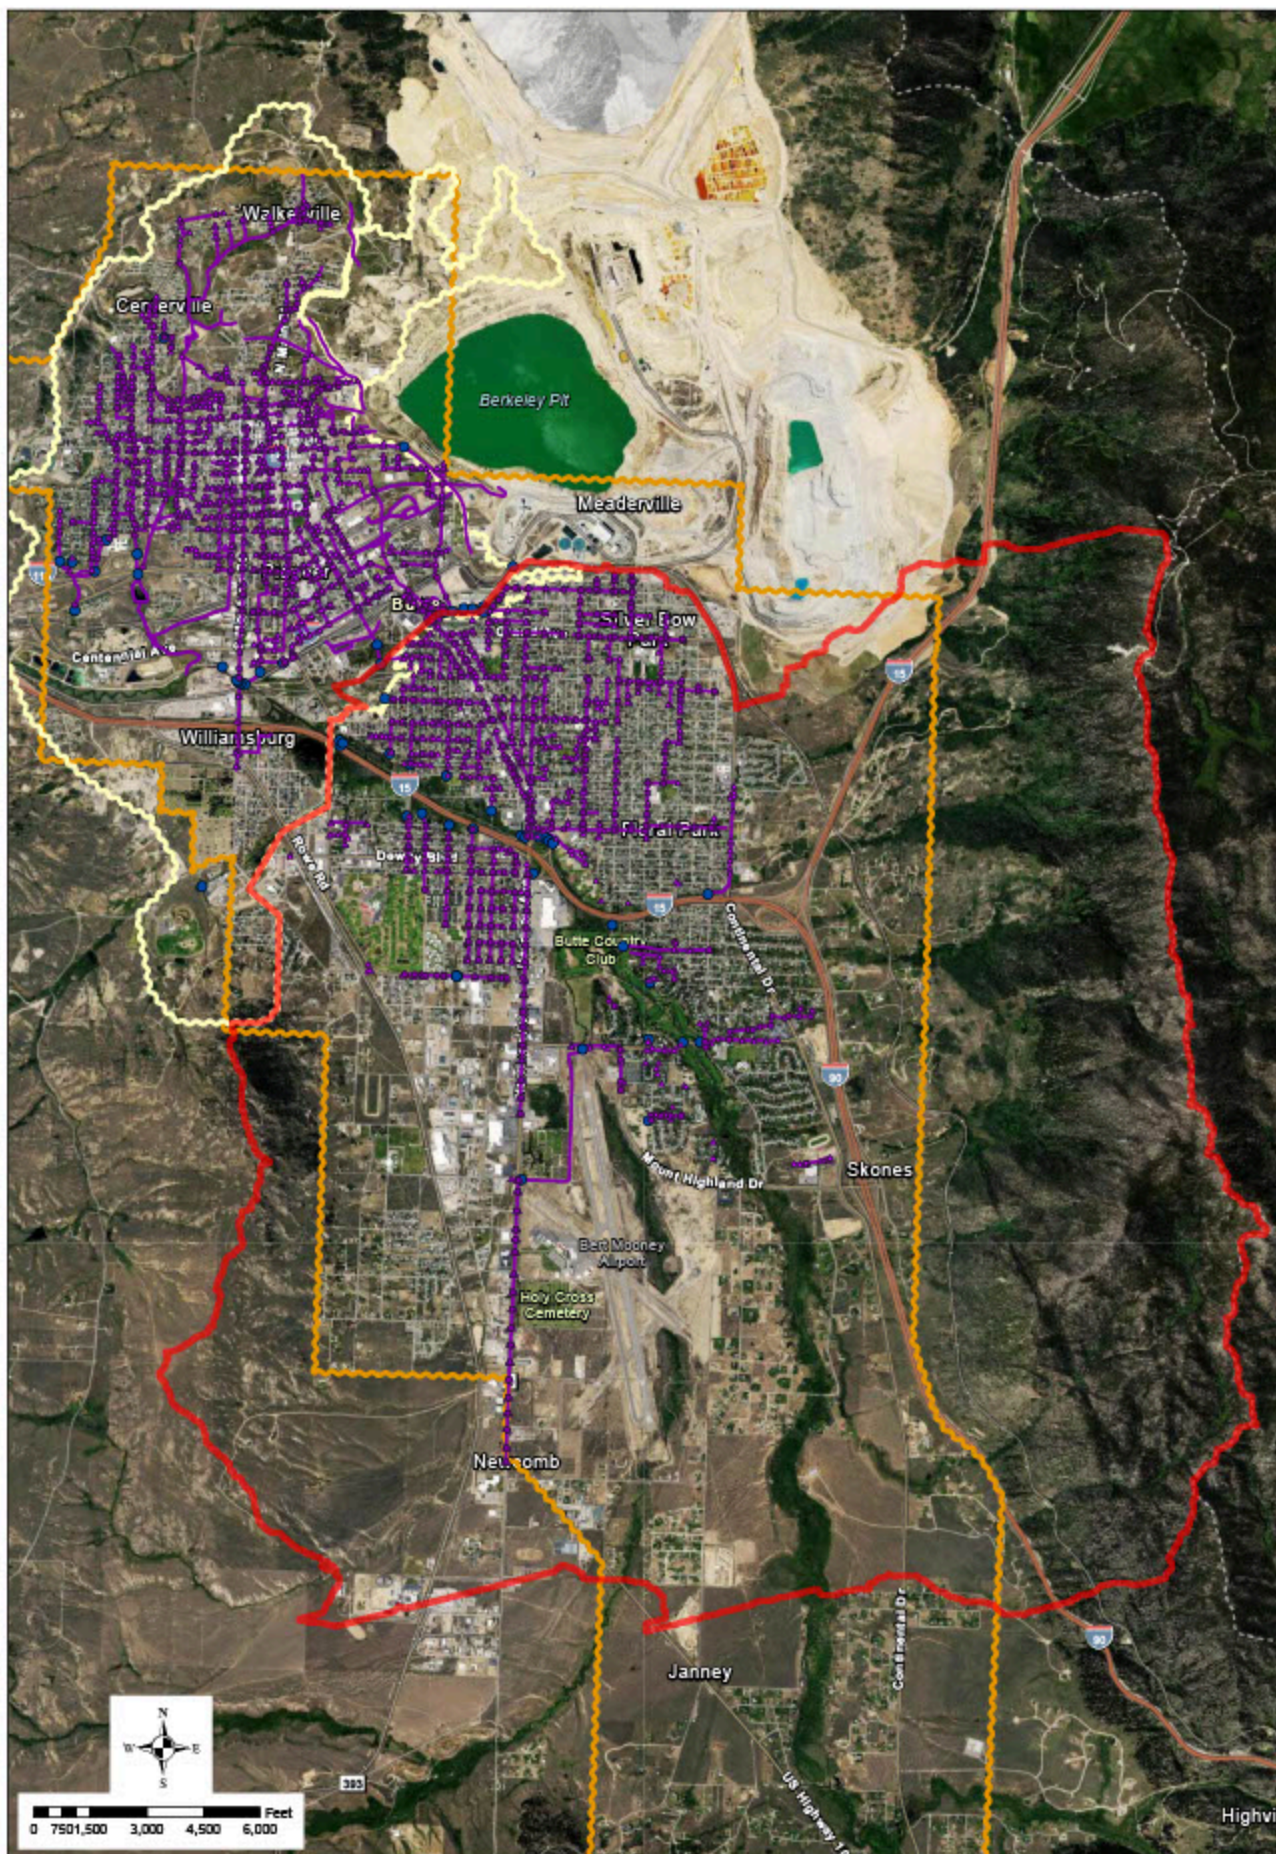

0 7501,500 3,000 4,500 6,000 Feet

- Stormwater Manhole
- ▲ Stormwater Inlet
- Stormwater Outlet
- Stormwater Line
- BPSOU Boundary
- Urban Limit Boundary
- Flats Master Plan Study Area



**BUTTE SILVER BOW
MS4-AREA**

Butte-Silver Bow Stormwater System

Job#: EGDPM41

Date: 2/17/2022

Figure 30

\\sdc117\mapdata\BPSOU\BPSOU_Stormwater_System_Map_2022_02_17.apr.apr.jpg

Appendix E
Dry Weather Outfall Inspections
High Priority Outfall Inspections
Maintenance Summary

**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	MG-O-2	Date:	2022-10-06
Time:	14:29	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	60
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Suburban Residential	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Double
Dimensions (in):	12	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		
No maintenance needed		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	WS-O-4	Date:	2022-10-06
Time:	14:15	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	60
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Ultra-Urban Residential (High Density)	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	Steel
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	
Submerged in Sediment:		Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		
Manholes in good shape		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	SC-O-7	Date:	2022-10-06
Time:	13:56	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	60
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Open Space	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	Steel
Shape:	Circular	Number of Pipes:	Triple
Dimensions (in):	60	Submerged in Water:	No
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Abnormal Vegetation	
Outfall		
		Deposits/Stains .
Abnormal	Excessive	Poor pool quality .
Pipe benthic	.	
COMMENTS		

Excess vegetation, could jet out sediment as well

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	AB-O-3	Date:	2022-10-06
Time:	13:11	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	60
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Industrial	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	No
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Outfall Damage	
Outfall	Spalling, Cracking or Chipping	Deposits/Stains .
Abnormal		Poor pool quality .
Pipe benthic	.	
COMMENTS		

PVC broken and some sediment built up along with vegetation in the channel

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No. No maintenance needed



--	--

**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BG-O-2	Date:	2022-10-06
Time:	13:00	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	60
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Open Space	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	RCP
Shape:	Circular	Number of Pipes:	Double
Dimensions (in):	24	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Outfall Damage	
Outfall	Corrosion	Deposits/Stains .
Abnormal		Poor pool quality .
Pipe benthic	.	
COMMENTS		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION			
---	--	--	--

Unlikely			
----------	--	--	--

SECTION 7: DATA COLLECTION			
----------------------------	--	--	--

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE			
--	--	--	--

No			
----	--	--	--



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BG-O-3	Date:	2022-10-06
Time:	12:53	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	60
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Industrial	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	RCP
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	36	Submerged in Water:	No
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	Yes
Flow Description:	Trickle		

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

Recently maintained looks good.

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BG-O-1	Date:	2022-10-06
Time:	12:46	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	54
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Industrial, Commercial	Known Industries:	Grocery store
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	RCP
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	36	Submerged in Water:	No
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

Recently maintained looks good

SECTION 6: OVERALL OUTFALL CHARACTERIZATION


Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-3	Date:	2022-10-06
Time:	12:34	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	54
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Open Space	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	RCP
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	36	Submerged in Water:	No
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Deposits/Stains, Abnormal Vegetation	
Outfall		Deposits/Stains .
Abnormal		Poor pool quality .
Pipe benthic	.	
COMMENTS		

Sediment in the bottoms third of pipe and vegetation growing around outfall but no maintenance needed

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-4	Date:	2022-10-06
Time:	12:24	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	56
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Suburban Residential	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	Steel
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	Fully
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Abnormal Vegetation	
Outfall		Deposits/Stains .
Abnormal		Poor pool quality .
Pipe benthic	.	
COMMENTS		

Pipe submerged and sediment and vegetation encroaching into pipe

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Potential (presence of two or more indicators)

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No, just potential maintenance



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-31	Date:	2022-10-06
Time:	12:17	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	54
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Suburban Residential	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Triple
Dimensions (in):	12	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		
Good shape		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-30	Date:	2022-10-06
Time:	12:10	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	54
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:		Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,		Found pipe from previous inspection form	

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	Fully
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

Full of water, could use maintenance to convey flow and connect it to wetland

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Potential (presence of two or more indicators)

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-30	Date:	2022-10-06
Time:	12:06	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	54
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Open Space	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	In-Stream	Material:	
Shape:		Number of Pipes:	
Dimensions (in):		Submerged in Water:	
Submerged in Sediment:		Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

Can't locate pipe but did find sign, outfall discharge area conveys flow to connecting wetland area, no maintenance needed

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-14	Date:	2022-10-06
Time:	11:51	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	54
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Suburban Residential	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	RCP
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Spalling, Cracking or Chipping	Deposits/Stains .
Abnormal		Poor pool quality .
Pipe benthic	.	
COMMENTS		

A little portion of top of pipe cracked but nothing major

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No.



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	SC-O-6	Date:	2022-10-06
Time:	11:40	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	54
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Open Space	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	Partially
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)	
Indicator	Deposits/Stains, Poor Pool quality		
Outfall	Spalling, Cracking or Chipping	Deposits/Stains	Flow Line,
Abnormal		Poor pool quality	Colors, Floatables, Oil Sheen,
Pipe benthic	.		
COMMENTS			

Pipe broken, sheen present, color and cloudy water present

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Potential (presence of two or more indicators)

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No but look into potential sources of sheen, appears to be organic



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	SC-O-5	Date:	2022-10-06
Time:	11:27	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	53
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial, Open Space	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall, Outfall found above patch of vegetated wetland area west of previously surveyed point			

SECTION 2: OUTFALL DESCRIPTION

Location:	Open drainage	Material:	Other
Shape:	Trapezoid	Number of Pipes:	
Dimensions (in):		Submerged in Water:	
Submerged in Sediment:		Open Drainage Depth:	24
Open Drainage Width:	18	Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)	
Indicator	Deposits/Stains, Abnormal Vegetation		
Outfall		Deposits/Stains	Flow Line,
Abnormal	Excessive	Poor pool quality	.
Pipe benthic	.		
COMMENTS			

Trash and sediment build up. Excessive vegetation but are is designed to catch water and create wetland. Clean debris and sediment

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Potential (presence of two or more indicators)

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

Trash but gets caught by surrounding vegetation



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-22	Date:	2022-10-06
Time:	11:14	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	52
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial	Known Industries:	Hotel
Lat		Long	
Notes (e.g. origin of outfall,		Could not locate in the field	

SECTION 2: OUTFALL DESCRIPTION

Location:		Material:	
Shape:		Number of Pipes:	
Dimensions (in):		Submerged in Water:	
Submerged in Sediment:		Open Drainage Depth:	
Open Drainage Width:		Flow Present	
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION			
SECTION 7: DATA COLLECTION			
Sample for the		Collected from	
Intermittent flow		Type	
SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE			

--	--	--	--

**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-18	Date:	2022-10-06
Time:	11:01	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	52
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial	Known Industries:	Hotel
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	6	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-19	Date:	2022-10-06
Time:	10:56	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	52
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial	Known Industries:	Hotel
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	6	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Outfall Damage	
Outfall	Spalling, Cracking or Chipping	Deposits/Stains .
Abnormal		Poor pool quality .
Pipe benthic	.	
COMMENTS		

Broken pvc but not inhibiting outfall function

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-23	Date:	2022-10-06
Time:	10:47	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	52
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial	Known Industries:	Hotel
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	Steel
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	6	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No.



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-20	Date:	2022-10-06
Time:	10:41	Investigators	DL, KW
Form completed by:	KW	Temperature (F)	52
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial	Known Industries:	Hotel
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	6	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	Yes
Flow Description:	Moderate		

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-21	Date:	2022-10-06
Time:	10:38	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	55
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial	Known Industries:	Hotel
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	6	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

			
--	--	--	--

**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-24	Date:	2022-10-06
Time:	10:04	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	50
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Suburban Residential	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,	Not really intact, metal is bent and grass overgrown		

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	Steel
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Outfall Damage	
Outfall	Spalling, Cracking or Chipping	Deposits/Stains .
Abnormal	Excessive, Inhibited	Poor pool quality .
Pipe benthic	.	
COMMENTS		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Potential (presence of two or more indicators)

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

Look into this one and it's potential to not be an outfall due to nature of site



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-1	Date:	2022-10-06
Time:	09:46	Investigators	DL, KW
Form completed by:	DL	Temperature (F)	50
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Golf Course	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	Other
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	24	Submerged in Water:	Partially
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)	
Indicator	Deposits/Stains, Abnormal Vegetation		
Outfall		Deposits/Stains	Other, Partially full of sediment
Abnormal	Excessive	Poor pool quality	.
Pipe benthic	.		
COMMENTS			

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Potential (presence of two or more indicators)

SECTION 7: DATA COLLECTION

Sample for the	No	Collected from	
Intermittent flow	No	Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

No, maintenance of sediment and vegetation recommended



**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-8	Date:	2022-12-14
Time:	12:55	Investigators	DL, KW, JT
Form completed by:	DL	Temperature (F)	20
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Commercial	Known Industries:	Restaurant
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	RCP
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	48	Submerged in Water:	No
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)	
Indicator			
Outfall		Deposits/Stains	Flow Line,
Abnormal		Poor pool quality	.
Pipe benthic	.		
COMMENTS			

Ice build up on drainage end

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	Collected from
Intermittent flow	Type

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-26	Date:	2022-12-14
Time:	13:08	Investigators	DL, JT, KW
Form completed by:	DL	Temperature (F)	20
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Golf Course	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	RCP
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	36	Submerged in Water:	No
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		
None		

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the		Collected from	
Intermittent flow		Type	

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

			
--	--	--	--

**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-32	Date:	2022-12-14
Time:	13:26	Investigators	DL, KW, JT
Form completed by:	DL	Temperature (F)	20
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Suburban Residential	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,		Sign down, vegetation encroaching	

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	PVC
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	12	Submerged in Water:	No
Submerged in Sediment:	Partially	Open Drainage Depth:	
Open Drainage Width:		Flow Present	No
Flow Description:			

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator	Abnormal Vegetation	
Outfall		Deposits/Stains .
Abnormal		Poor pool quality .
Pipe benthic	.	
COMMENTS		

Could use maintenance to dig out and put sign back

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	Collected from
Intermittent flow	Type

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

**CITY OF BUTTE-SILVER BOW COUNTY
OUTFALL RECONNAISSANCE INVENTORY/
SAMPLE COLLECTION FIELD SHEET**



**Consulting Scientists & Engineers
480 East Park Street Butte,
Montana 59701 Phone:
406-782-5220**

SECTION 1: BACKGROUND DATA

Outfall ID:	BT-O-17	Date:	2022-12-14
Time:	13:37	Investigators	DL, JT, KW
Form completed by:	DL	Temperature (F)	20
Rainfall in Last 24 hours:	No	Rainfall in Last 48	No
Landuse in Drainage Area:	Suburban Residential, Open Space	Known Industries:	
Lat		Long	
Notes (e.g. origin of outfall,			

SECTION 2: OUTFALL DESCRIPTION

Location:	Pipe	Material:	HDPE
Shape:	Circular	Number of Pipes:	Single
Dimensions (in):	18	Submerged in Water:	Partially
Submerged in Sediment:	No	Open Drainage Depth:	
Open Drainage Width:		Flow Present	Yes
Flow Description:	Moderate		

SECTION 3 QUANTITATIVE CHARACTERIZATION

PARAMETER		RESULT	UNIT	EQUIPMENT
Flow #1	Volume		Liter	Bottle
	Time to fill		Sec	
Flow #2	Flow depth		In	Tape measure
	Flow width		Ft, In	Tape measure
	Measured		Ft, In	Tape measure
	Time of travel		S	Stop watch
Temperature			F	Thermometer
pH			pH Units	Test strip/Probe
Conductivity			EC	Probe
Ammonia			mg/L	Test strip

SECTION 4: PHYSICAL INDICATORS FOR FLOWING OUTFALLS ONLY

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicators		
Odor	.	
Color	.	
Turbidity	See severity	
Floatables (Not	.	

SECTION 5: PHYSICAL INDICATORS FOR BOTH FLOWING AND NON-FLOWING

INDICATOR	DESCRIPTION	RELATIVE SEVERITY INDEX (1-3)
Indicator		
Outfall	Deposits/Stains	.
Abnormal	Poor pool quality	.
Pipe benthic	.	
COMMENTS		

Lots of water in wetland area and provided moderate continuous flow to creek

SECTION 6: OVERALL OUTFALL CHARACTERIZATION

Unlikely

SECTION 7: DATA COLLECTION

Sample for the	Collected from
Intermittent flow	Type

SECTION 8: ANY NON-ILLCIT DISCHARGE CONCERNS (E.G., TRASH OR NEEDED INFRASTRUCTURE

			
--	--	--	--

Outfall Maintenance Sheet

Outfall #	Date	Improvements Made	Time	Equipment
BT-0-1	12-13-22	DUG OUT OUTFALL AND DITCH	2 Hours	MINI EXCAVATOR
SC-D-6	12-20-22	DUG OUT 100' OF DITCH	8 Hours	VOLVO 235 EXCAVATOR
BT-0-4	—	WE NEED TO DIG OUT IN SPRING ALSO NEED A PERMIT	—	—
BT-0-30	2-10-23	DUG OUT DITCH - EXPOSED 12" LINE	3 Hours	MINI EXCAVATOR

Appendix F
Construction Inspections
2020 Ordinances Update
2020 Engineering Standards Update Final
Stormwater Management Checklist



N/A

Butte-Silver Bow Public Works Department

Pollutants Present at the Time of the Inspection:

Soils

- ☐ Areas of Shallow Grade (3:1 or less)
- ☐ Areas of Steep Grade (3:1 or greater)
- ☐ Slopes
- ☐ Ditch
- ☐ Stockpiles
- ☐ Contaminated Soils
- ☐ Import & Export Operations
- ☐ Entrance/Exit Locations
- ☐ Other: _____

Materials

- ☐ Loading & Unloading Operations
- ☐ Storage of Building Materials
- ☐ Storage of Chemicals
- ☐ Portable Toilets
- ☐ Concrete Batch Plant
- ☐ Asphalt Batch Plant
- ☐ Worker Trash
- ☐ Demolition Materials/Debris
- ☐ Other: _____

Activities

- ☐ Concrete Truck Washout
- ☐ Masonry—Stone/Brick/Concrete
- ☐ Spray/Wand Applications
- ☐ Finish Work—Drywall/Painting
- ☐ Equipment Washing
- ☐ Washing of Buildings
- ☐ Maintenance of Equipment
- ☐ Refueling Operations
- ☐ Application of Herbicides, Pesticides, Fertilizers
- ☐ Application of Solvents or Detergents
- ☐ Construction Dewatering
- ☐ Other: _____

BMPs Present at the Time of the Inspection:

Erosion Control BMPs

- ☐ Surface Roughening
- ☐ Diversion Ditches
- ☐ Velocity Checks/Check Dams
- ☐ Preservations of Existing Vegetation
- ☐ Minimizing Ground Disturbance
- ☐ Mulch—Straw/Compost
- ☐ Tackifiers/Soil Binders
- ☐ Temporary Seeding
- ☐ Erosion Control Blankets
- ☐ Rough Cut Street Controls/Water Bars
- ☐ Channel Liner
- ☐ Stream Crossing
- ☐ Terracing
- ☐ Culvert
- ☐ Outfall/Outlet Protection (Rip Rap)
- ☐ Other: _____

Administrative Controls

- ☐ Concrete and Liquid Waste Washouts
- ☐ Worker Toilets
- ☐ Construction Fencing
- ☐ Dust Control
- ☐ Secondary Containment
- ☐ Dumpsters/ Waste Receptacles
- ☐ Stabilized Staging Area
- ☐ Material Storage and Stockpile Area
- ☐ Paving and Painting Controls
- ☐ Saw Cutting and Grinding Controls
- ☐ Spill Prevention and Response Procedures
- ☐ Traffic Control
- ☐ Back Charging/Penalties
- ☐ Other: _____

Run On/Runoff Control BMPs

- ☐ Temporary Slope Drain
- ☐ Rock Run Down
- ☐ Clean Water Diversion
- ☐ Drainage Swales
- ☐ Other: _____

Sediment Control BMPs

- ☐ Silt Fence
- ☐ Straw Wattles
- ☐ Rock Wattles/Rock Socks
- ☐ Curb Socks
- ☐ Straw Bales
- ☐ Earthen Berms
- ☐ Vegetative Buffers
- ☐ Drainage Ditch/Ditch Berm
- ☐ Gravel Pack
- ☐ Tarps, Plastic, Visqueen
- ☐ Compost Socks
- ☐ Brush Barrier
- ☐ Sandbag Barrier
- ☐ Inlet Protection
- ☐ Vehicle Tracking Control Pad
- ☐ Stabilization Vehicle Entrance
- ☐ Stabilization Parking Area
- ☐ Stabilization Construction Roadway
- ☐ Street Sweeping
- ☐ Sediment Trap
- ☐ Sediment Basin
- ☐ Other: _____

Post Construction BMPs

- ☐ Detention Pond(s)
- ☐ Retention Pond(s)
- ☐ Drainage Swales
- ☐ Infiltration System(s)
- ☐ Dry Well(s)
- ☐ Other: _____



Butte-Silver Bow Public Works Department

N/A

BMP MAINTENANCE AND CORRECTIVE ACTIONS

BMP Requiring Maintenance and/or Corrective Actions and Location of BMP	Maintenance Needed?	Corrective Action Required?	Date When Maintenance or Corrective Action(s) are Completed	Description of Corrective Action
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		

DISCHARGE OF SEDIMENT OR OTHER POLLUTANT AND UPDATES

Were discharges of sediment or other pollutants observed during inspection? ☐ Yes ☐ No If yes, is the discharge to an impaired waterbody? ☒ Yes ☐ No

If discharge is observed, please explain. Include locations of discharges and a description and dates of completed corrective actions: _____

PROJECT CONTACT COMMUNICATION

Name/Position: _____ Date: _____

Summary: _____



Butte-Silver Bow Public Works Department

FORM #5—CONSTRUCTION SITE VISIT STORM WATER INSPECTION FORM (CONSTRUCTION)

GENERAL INFORMATION

Project Name: Southern Montana Veterans Home MTR 109741 Location: 65 Veterans Circle
Date of Inspection: 12/14/2022 Start/End Time: 1500/1530
Inspector's Name(s): DL, K.W. Inspector's Title(s): _____
Inspector's Phone: _____ Phase of Construction: _____

Type of Inspection:

- ☐ Beginning of Construction ☐ Pre-Storm Event ☐ During Rain Event ☐ Post-Rain Event
☐ Routine ☒ Random ☐ Conclusion of Project ☐ Response to Violation or Complaint

Weather Conditions at Time of the Inspection:

- ☐ Clear ☐ Cloudy ☐ Rain ☐ Sleet ☐ Fog ☒ Snowing ☐ High Winds
☐ Other: _____ Temperature: 25°F

Is a Storm Water Discharge Occurring? ☐ Yes ☒ No Observations: _____

If Yes, is the Discharge to an Impaired Waterbody? ☐ Yes ☒ No

INSPECTION FINDINGS

Major Construction Activities at the Time of the Inspection: Unknown activities

One piece of equipment on site
& stockpile of material (dirt)

winter weather conditions present
Revisit prior to spring runoff.



N/A

Butte-Silver Bow Public Works Department

Pollutants Present at the Time of the Inspection:

Soils

- ☐ Areas of Shallow Grade (3:1 or less)
- ☐ Areas of Steep Grade (3:1 or greater)
- ☐ Slopes
- ☐ Ditch
- ☐ Stockpiles
- ☐ Contaminated Soils
- ☐ Import & Export Operations
- ☐ Entrance/Exit Locations
- ☐ Other: _____

Materials

- ☐ Loading & Unloading Operations
- ☐ Storage of Building Materials
- ☐ Storage of Chemicals
- ☐ Portable Toilets
- ☐ Concrete Batch Plant
- ☐ Asphalt Batch Plant
- ☐ Worker Trash
- ☐ Demolition Materials/Debris
- ☐ Other: _____

Activities

- ☐ Concrete Truck Washout
- ☐ Masonry—Stone/Brick/Concrete
- ☐ Spray/Wand Applications
- ☐ Finish Work—Drywall/Painting
- ☐ Equipment Washing
- ☐ Washing of Buildings
- ☐ Maintenance of Equipment
- ☐ Refueling Operations
- ☐ Application of Herbicides, Pesticides, Fertilizers
- ☐ Application of Solvents or Detergents
- ☐ Construction Dewatering
- ☐ Other: _____

BMPs Present at the Time of the Inspection:

Erosion Control BMPs

- ☐ Surface Roughening
- ☐ Diversion Ditches
- ☐ Velocity Checks/Check Dams
- ☐ Preservations of Existing Vegetation
- ☐ Minimizing Ground Disturbance
- ☐ Mulch—Straw/Compost
- ☐ Tackifiers/Soil Binders
- ☐ Temporary Seeding
- ☐ Erosion Control Blankets
- ☐ Rough Cut Street Controls/Water Bars
- ☐ Channel Liner
- ☐ Stream Crossing
- ☐ Terracing
- ☐ Culvert
- ☐ Outfall/Outlet Protection (Rip Rap)
- ☐ Other: _____

Administrative Controls

- ☐ Concrete and Liquid Waste Washouts
- ☐ Worker Toilets
- ☐ Construction Fencing
- ☐ Dust Control
- ☐ Secondary Containment
- ☐ Dumpsters/ Waste Receptacles
- ☐ Stabilized Staging Area
- ☐ Material Storage and Stockpile Area
- ☐ Paving and Painting Controls
- ☐ Saw Cutting and Grinding Controls
- ☐ Spill Prevention and Response Procedures
- ☐ Traffic Control
- ☐ Back Charging/Penalties
- ☐ Other: _____

Run On/Runoff Control BMPs

- ☐ Temporary Slope Drain
- ☐ Rock Run Down
- ☐ Clean Water Diversion
- ☐ Drainage Swales
- ☐ Other: _____

Sediment Control BMPs

- ☐ Silt Fence
- ☐ Straw Wattles
- ☐ Rock Wattles/Rock Socks
- ☐ Curb Socks
- ☐ Straw Bales
- ☐ Earthen Berms
- ☐ Vegetative Buffers
- ☐ Drainage Ditch/Ditch Berm
- ☐ Gravel Pack
- ☐ Tarps, Plastic, Visqueen
- ☐ Compost Socks
- ☐ Brush Barrier
- ☐ Sandbag Barrier
- ☐ Inlet Protection
- ☐ Vehicle Tracking Control Pad
- ☐ Stabilization Vehicle Entrance
- ☐ Stabilization Parking Area
- ☐ Stabilization Construction Roadway
- ☐ Street Sweeping
- ☐ Sediment Trap
- ☐ Sediment Basin
- ☐ Other: _____

Post Construction BMPs

- ☐ Detention Pond(s)
- ☐ Retention Pond(s)
- ☐ Drainage Swales
- ☐ Infiltration System(s)
- ☐ Dry Well(s)
- ☐ Other: _____



Butte-Silver Bow Public Works Department

BMP MAINTENANCE AND CORRECTIVE ACTIONS

BMP Requiring Maintenance and/or Corrective Actions and Location of BMP	Maintenance Needed?	Corrective Action Required?	Date When Maintenance or Corrective Action(s) are Completed	Description of Corrective Action
N/A	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		

DISCHARGE OF SEDIMENT OR OTHER POLLUTANT AND UPDATES

Were discharges of sediment or other pollutants observed during inspection? ☐ Yes ☒ No If yes, is the discharge to an impaired waterbody? ☒ Yes ☒ No

If discharge is observed, please explain. Include locations of discharges and a description and dates of completed corrective actions: _____

PROJECT CONTACT COMMUNICATION

Name/Position: _____ Date: _____

Summary: _____



Butte-Silver Bow Public Works Department

FORM #5—CONSTRUCTION SITE VISIT STORM WATER INSPECTION FORM (CONSTRUCTION)

GENERAL INFORMATION

Project Name: Butte GM Location: 5090 Harrison Ave
Date of Inspection: 12/14/2022 Start/End Time: 1510/1515
Inspector's Name(s): DL, KW Inspector's Title(s): _____
Inspector's Phone: _____ Phase of Construction: _____

Type of Inspection:

- ☐ Beginning of Construction ☐ Pre-Storm Event ☐ During Rain Event ☐ Post-Rain Event
☐ Routine ☒ Random ☐ Conclusion of Project ☐ Response to Violation or Complaint

Weather Conditions at Time of the Inspection:

- ☐ Clear ☐ Cloudy ☐ Rain ☐ Sleet ☐ Fog ☒ Snowing ☐ High Winds
☐ Other: _____ Temperature: _____

Is a Storm Water Discharge Occurring? ☐ Yes ☒ No Observations: _____

If Yes, is the Discharge to an Impaired Waterbody? ☐ Yes ☐ No

INSPECTION FINDINGS

Major Construction Activities at the Time of the Inspection: Stagnant Project

No Follow up needed yet.



N/A

Butte-Silver Bow Public Works Department

Pollutants Present at the Time of the Inspection:

Soils

- ☐ Areas of Shallow Grade (3:1 or less)
- ☐ Areas of Steep Grade (3:1 or greater)
- ☐ Slopes
- ☐ Ditch
- ☐ Stockpiles
- ☐ Contaminated Soils
- ☐ Import & Export Operations
- ☐ Entrance/Exit Locations
- ☐ Other: _____

Materials

- ☐ Loading & Unloading Operations
- ☐ Storage of Building Materials
- ☐ Storage of Chemicals
- ☐ Portable Toilets
- ☐ Concrete Batch Plant
- ☐ Asphalt Batch Plant
- ☐ Worker Trash
- ☐ Demolition Materials/Debris
- ☐ Other: _____

Activities

- ☐ Concrete Truck Washout
- ☐ Masonry—Stone/Brick/Concrete
- ☐ Spray/Wand Applications
- ☐ Finish Work—Drywall/Painting
- ☐ Equipment Washing
- ☐ Washing of Buildings
- ☐ Maintenance of Equipment
- ☐ Refueling Operations
- ☐ Application of Herbicides, Pesticides, Fertilizers
- ☐ Application of Solvents or Detergents
- ☐ Construction Dewatering
- ☐ Other: _____

BMPs Present at the Time of the Inspection:

Erosion Control BMPs

- ☐ Surface Roughening
- ☐ Diversion Ditches
- ☐ Velocity Checks/Check Dams
- ☐ Preservations of Existing Vegetation
- ☐ Minimizing Ground Disturbance
- ☐ Mulch—Straw/Compost
- ☐ Tackifiers/Soil Binders
- ☐ Temporary Seeding
- ☐ Erosion Control Blankets
- ☐ Rough Cut Street Controls/Water Bars
- ☐ Channel Liner
- ☐ Stream Crossing
- ☐ Terracing
- ☐ Culvert
- ☐ Outfall/Outlet Protection (Rip Rap)
- ☐ Other: _____

Administrative Controls

- ☐ Concrete and Liquid Waste Washouts
- ☐ Worker Toilets
- ☐ Construction Fencing
- ☐ Dust Control
- ☐ Secondary Containment
- ☐ Dumpsters/ Waste Receptacles
- ☐ Stabilized Staging Area
- ☐ Material Storage and Stockpile Area
- ☐ Paving and Painting Controls
- ☐ Saw Cutting and Grinding Controls
- ☐ Spill Prevention and Response Procedures
- ☐ Traffic Control
- ☐ Back Charging/Penalties
- ☐ Other: _____

Run On/Runoff Control BMPs

- ☐ Temporary Slope Drain
- ☐ Rock Run Down
- ☐ Clean Water Diversion
- ☐ Drainage Swales
- ☐ Other: _____

Sediment Control BMPs

- ☐ Silt Fence
- ☐ Straw Wattles
- ☐ Rock Wattles/Rock Socks
- ☐ Curb Socks
- ☐ Straw Bales
- ☐ Earthen Berms
- ☐ Vegetative Buffers
- ☐ Drainage Ditch/Ditch Berm
- ☐ Gravel Pack
- ☐ Tarps, Plastic, Visqueen
- ☐ Compost Socks
- ☐ Brush Barrier
- ☐ Sandbag Barrier
- ☐ Inlet Protection
- ☐ Vehicle Tracking Control Pad
- ☐ Stabilization Vehicle Entrance
- ☐ Stabilization Parking Area
- ☐ Stabilization Construction Roadway
- ☐ Street Sweeping
- ☐ Sediment Trap
- ☐ Sediment Basin
- ☐ Other: _____

Post Construction BMPs

- ☐ Detention Pond(s)
- ☐ Retention Pond(s)
- ☐ Drainage Swales
- ☐ Infiltration System(s)
- ☐ Dry Well(s)
- ☐ Other: _____



Butte-Silver Bow Public Works Department

BMP MAINTENANCE AND CORRECTIVE ACTIONS

BMP Requiring Maintenance and/or Corrective Actions and Location of BMP	Maintenance Needed?	Corrective Action Required?	Date When Maintenance or Corrective Action(s) are Completed	Description of Corrective Action
N/A	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		

DISCHARGE OF SEDIMENT OR OTHER POLLUTANT AND UPDATES

Were discharges of sediment or other pollutants observed during inspection? ☐ Yes ☒ No If yes, is the discharge to an impaired waterbody? ☒ Yes ☒ No

If discharge is observed, please explain. Include locations of discharges and a description and dates of completed corrective actions: _____

PROJECT CONTACT COMMUNICATION

Name/Position: _____ Date: _____

Summary: _____



Butte-Silver Bow Public Works Department

FORM #5—CONSTRUCTION SITE VISIT STORM WATER INSPECTION FORM (CONSTRUCTION)

GENERAL INFORMATION

Project Name: Copper Fox Subdivision Location: Adjacent to Mary Leary School
Date of Inspection: 12/14/22 Start/End Time: 1510/1520
Inspector's Name(s): DL/KW Inspector's Title(s): _____
Inspector's Phone: _____ Phase of Construction: 4 Individual Lots have construction
Type of Inspection:

- ☐ Beginning of Construction ☐ Pre-Storm Event ☐ During Rain Event ☐ Post-Rain Event
☐ Routine ☒ Random ☐ Conclusion of Project ☐ Response to Violation or Complaint

Weather Conditions at Time of the Inspection:

- ☐ Clear ☐ Cloudy ☐ Rain ☐ Sleet ☐ Fog ☒ Snowing ☐ High Winds
☐ Other: _____ Temperature: 25°F

Is a Storm Water Discharge Occurring? ☐ Yes ☒ No Observations: _____

If Yes, is the Discharge to an Impaired Waterbody? ☐ Yes ☒ No

INSPECTION FINDINGS

Major Construction Activities at the Time of the Inspection: 4 lots under construction. No BMPs visible / Permanent stormwater basins/swales/inlets present
winter weather conditions exist on site
Follow up prior to spring runoff



Butte-Silver Bow Public Works Department

Pollutants Present at the Time of the Inspection:

Soils

- ☐ Areas of Shallow Grade (3:1 or less)
- ☐ Areas of Steep Grade (3:1 or greater)
- ☐ Slopes
- ☐ Ditch
- ☐ Stockpiles
- ☐ Contaminated Soils
- ☐ Import & Export Operations
- ☐ Entrance/Exit Locations
- ☐ Other: _____

Materials

- ☐ Loading & Unloading Operations
- ☐ Storage of Building Materials
- ☐ Storage of Chemicals
- ☐ Portable Toilets
- ☐ Concrete Batch Plant
- ☐ Asphalt Batch Plant
- ☐ Worker Trash
- ☐ Demolition Materials/Debris
- ☐ Other: _____

Activities

- ☐ Concrete Truck Washout
- ☐ Masonry—Stone/Brick/Concrete
- ☐ Spray/Wand Applications
- ☐ Finish Work—Drywall/Painting
- ☐ Equipment Washing
- ☐ Washing of Buildings
- ☐ Maintenance of Equipment
- ☐ Refueling Operations
- ☐ Application of Herbicides, Pesticides, Fertilizers
- ☐ Application of Solvents or Detergents
- ☐ Construction Dewatering
- ☐ Other: _____

BMPs Present at the Time of the Inspection:

Erosion Control BMPs

- ☐ Surface Roughening
- ☐ Diversion Ditches
- ☐ Velocity Checks/Check Dams
- ☐ Preservations of Existing Vegetation
- ☐ Minimizing Ground Disturbance
- ☐ Mulch—Straw/Compost
- ☐ Tackifiers/Soil Binders
- ☐ Temporary Seeding
- ☐ Erosion Control Blankets
- ☐ Rough Cut Street Controls/Water Bars
- ☐ Channel Liner
- ☐ Stream Crossing
- ☐ Terracing
- ☐ Culvert
- ☐ Outfall/Outlet Protection (Rip Rap)
- ☐ Other: _____

Administrative Controls

- ☐ Concrete and Liquid Waste Washouts
- ☐ Worker Toilets
- ☐ Construction Fencing
- ☐ Dust Control
- ☐ Secondary Containment
- ☐ Dumpsters/ Waste Receptacles
- ☐ Stabilized Staging Area
- ☐ Material Storage and Stockpile Area
- ☐ Paving and Painting Controls
- ☐ Saw Cutting and Grinding Controls
- ☐ Spill Prevention and Response Procedures
- ☐ Traffic Control
- ☐ Back Charging/Penalties
- ☐ Other: _____

Run On/Runoff Control BMPs

- ☐ Temporary Slope Drain
- ☐ Rock Run Down
- ☐ Clean Water Diversion
- ☐ Drainage Swales
- ☐ Other: _____

Sediment Control BMPs

- ☐ Silt Fence
- ☐ Straw Wattles
- ☐ Rock Wattles/Rock Socks
- ☐ Curb Socks
- ☐ Straw Bales
- ☐ Earthen Berms
- ☐ Vegetative Buffers
- ☐ Drainage Ditch/Ditch Berm
- ☐ Gravel Pack
- ☐ Tarps, Plastic, Visqueen
- ☐ Compost Socks
- ☐ Brush Barrier
- ☐ Sandbag Barrier
- ☐ Inlet Protection
- ☐ Vehicle Tracking Control Pad
- ☐ Stabilization Vehicle Entrance
- ☐ Stabilization Parking Area
- ☐ Stabilization Construction Roadway
- ☐ Street Sweeping
- ☐ Sediment Trap
- ☐ Sediment Basin
- ☐ Other: _____

Post Construction BMPs

- ☒ Detention Pond(s)
- ☐ Retention Pond(s)
- ☒ Drainage Swales
- ☒ Infiltration System(s)
- ☐ Dry Well(s)
- ☐ Other: _____



Butte-Silver Bow Public Works Department

BMP MAINTENANCE AND CORRECTIVE ACTIONS

BMP Requiring Maintenance and/or Corrective Actions and Location of BMP	Maintenance Needed?	Corrective Action Required?	Date When Maintenance or Corrective Action(s) are Completed	Description of Corrective Action
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		

DISCHARGE OF SEDIMENT OR OTHER POLLUTANT AND UPDATES

Were discharges of sediment or other pollutants observed during inspection? ☐ Yes ☒ No If yes, is the discharge to an impaired waterbody? ☒ Yes ☒ No
If discharge is observed, please explain. Include locations of discharges and a description and dates of completed corrective actions: _____

PROJECT CONTACT COMMUNICATION

Name/Position: _____ Date: _____

Summary: _____



Butte-Silver Bow Public Works Department

FORM #5—CONSTRUCTION SITE VISIT STORM WATER INSPECTION FORM (CONSTRUCTION)

GENERAL INFORMATION

Project Name: HW455 MTR 109762 Location: 3528 Harrison Ave
Date of Inspection: 12/14/22 Start/End Time: 1530/1540
Inspector's Name(s): NL, KCW Inspector's Title(s): _____
Inspector's Phone: _____ Phase of Construction: _____

Type of Inspection:

- ☐ Beginning of Construction ☐ Pre-Storm Event ☐ During Rain Event ☐ Post-Rain Event
☐ Routine ☒ Random ☐ Conclusion of Project ☐ Response to Violation or Complaint

Weather Conditions at Time of the Inspection:

- ☐ Clear ☐ Cloudy ☐ Rain ☐ Sleet ☐ Fog ☒ Snowing ☐ High Winds
☐ Other: _____ Temperature: 25°F

Is a Storm Water Discharge Occurring? ☐ Yes ☒ No Observations: _____

If Yes, is the Discharge to an Impaired Waterbody? ☐ Yes ☒ No

INSPECTION FINDINGS

Major Construction Activities at the Time of the Inspection: Vertical / Building work

winter weather conditions exist on
site. able to see silt fence
no pikes or earth work going on.



Butte-Silver Bow Public Works Department

Pollutants Present at the Time of the Inspection:

Soils

- ☐ Areas of Shallow Grade (3:1 or less)
- ☐ Areas of Steep Grade (3:1 or greater)
- ☐ Slopes
- ☐ Ditch
- ☐ Stockpiles
- ☐ Contaminated Soils
- ☐ Import & Export Operations
- ☐ Entrance/Exit Locations
- ☐ Other: _____

Materials

- ☐ Loading & Unloading Operations
- ☐ Storage of Building Materials
- ☐ Storage of Chemicals
- ☐ Portable Toilets
- ☐ Concrete Batch Plant
- ☐ Asphalt Batch Plant
- ☐ Worker Trash
- ☐ Demolition Materials/Debris
- ☐ Other: _____

Activities

- ☐ Concrete Truck Washout
- ☐ Masonry—Stone/Brick/Concrete
- ☐ Spray/Wand Applications
- ☐ Finish Work—Drywall/Painting
- ☐ Equipment Washing
- ☐ Washing of Buildings
- ☐ Maintenance of Equipment
- ☐ Refueling Operations
- ☐ Application of Herbicides, Pesticides, Fertilizers
- ☐ Application of Solvents or Detergents
- ☐ Construction Dewatering
- ☐ Other: _____

BMPs Present at the Time of the Inspection:

Erosion Control BMPs

- ☐ Surface Roughening
- ☐ Diversion Ditches
- ☐ Velocity Checks/Check Dams
- ☐ Preservations of Existing Vegetation
- ☐ Minimizing Ground Disturbance
- ☐ Mulch—Straw/Compost
- ☐ Tackifiers/Soil Binders
- ☐ Temporary Seeding
- ☐ Erosion Control Blankets
- ☐ Rough Cut Street Controls/Water Bars
- ☐ Channel Liner
- ☐ Stream Crossing
- ☐ Terracing
- ☐ Culvert
- ☐ Outfall/Outlet Protection (Rip Rap)
- ☐ Other: _____

Administrative Controls

- ☐ Concrete and Liquid Waste Washouts
- ☐ Worker Toilets
- ☐ Construction Fencing
- ☐ Dust Control
- ☐ Secondary Containment
- ☐ Dumpsters/ Waste Receptacles
- ☐ Stabilized Staging Area
- ☐ Material Storage and Stockpile Area
- ☐ Paving and Painting Controls
- ☐ Saw Cutting and Grinding Controls
- ☐ Spill Prevention and Response Procedures
- ☐ Traffic Control
- ☐ Back Charging/Penalties
- ☐ Other: _____

Run On/Runoff Control BMPs

- ☐ Temporary Slope Drain
- ☐ Rock Run Down
- ☐ Clean Water Diversion
- ☐ Drainage Swales
- ☐ Other: _____

Sediment Control BMPs

- ☒ Silt Fence
- ☐ Straw Wattles
- ☐ Rock Wattles/Rock Socks
- ☐ Curb Socks
- ☐ Straw Bales
- ☐ Earthen Berms
- ☐ Vegetative Buffers
- ☐ Drainage Ditch/Ditch Berm
- ☐ Gravel Pack
- ☐ Tarps, Plastic, Visqueen
- ☐ Compost Socks
- ☐ Brush Barrier
- ☐ Sandbag Barrier
- ☐ Inlet Protection
- ☐ Vehicle Tracking Control Pad
- ☐ Stabilization Vehicle Entrance
- ☐ Stabilization Parking Area
- ☐ Stabilization Construction Roadway
- ☐ Street Sweeping
- ☐ Sediment Trap
- ☐ Sediment Basin
- ☐ Other: _____

Post Construction BMPs

- ☐ Detention Pond(s)
- ☐ Retention Pond(s)
- ☐ Drainage Swales
- ☐ Infiltration System(s)
- ☐ Dry Well(s)
- ☐ Other: _____



Butte-Silver Bow Public Works Department

BMP MAINTENANCE AND CORRECTIVE ACTIONS

BMP Requiring Maintenance and/or Corrective Actions and Location of BMP	Maintenance Needed?	Corrective Action Required?	Date When Maintenance or Corrective Action(s) are Completed	Description of Corrective Action
N/A	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		
	☐ Yes ☐ No	☐ Yes ☐ No		

DISCHARGE OF SEDIMENT OR OTHER POLLUTANT AND UPDATES

Were discharges of sediment or other pollutants observed during inspection? ☐ Yes ☐ No If yes, is the discharge to an impaired waterbody? ☒ Yes ☐ No

If discharge is observed, please explain. Include locations of discharges and a description and dates of completed corrective actions: _____

PROJECT CONTACT COMMUNICATION

Name/Position: _____ Date: _____

Summary: _____

COUNCIL BILL NO. 2020-06

ORDINANCE NO. 2020-06

AN ORDINANCE AMENDING CHAPTER 32 OF TITLE 13 OF THE BUTTE-SILVER BOW MUNICIPAL CODE ENTITLED "STORM WATER MANAGEMENT"; SPECIFICALLY AMENDING SECTIONS 13.32.010, 13.32.020, 13.32.030, 13.32.210, 13.32.220, 13.32.310, 13.32.330, 13.32.340, 13.32.360, 13.32.420, 13.32.430 AND PROVIDING FOR AN EFFECTIVE DATE HEREIN.

NOW, THEREFORE, BE IT ORDAINED BY THE COUNCIL OF COMMISSIONERS OF THE CITY AND COUNTY OF BUTTE-SILVER BOW, STATE OF MONTANA:

SECTION 1: Amendment: Ordinance 10-13 and Section 13.32.010 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

ARTICLE I -GENERAL PROVISIONS

"13.32.010- Purpose. The purpose of this Chapter is to establish storm water management requirements and controls to protect and

safeguard the general health, safety, and welfare of the public, by adopting regulations for storm water discharges from new site development and redevelopment, non-storm water discharges to the storm drainage system, and by the creation of a storm water utility."

SECTION 2: Amendment: Ordinance 10-13 and Section 13.32.020 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

"13.32.020 Object. It is the object of this chapter to minimize impacts from storm water to the maximum extent practicable as required by federal and state law, as follows:

A. A. Minimize increases in storm water runoff from any development to prevent or reduce flooding, siltation, increases in stream temperature, and streambank erosion, to protect private property, to protect water quality, and to maintain the integrity of stream channels and runoff characteristics of the area.

B. Minimize increases in nonpoint source pollution caused by storm water runoff from development which would otherwise degrade water quality.

C. Reduce storm water runoff rates and volumes, soil erosion and nonpoint source pollution, wherever possible, through storm water management controls and encouragement of Low Impact Development practices and to ensure that these management controls are properly maintained and pose no threat to public safety.

D. SAME.

E. To prohibit illicit connections and illegal discharges to the MS4.

F. To establish legal authority to carry out all inspection, surveillance and monitoring procedures necessary to ensure compliance with this Chapter.

G. Comply with requirements of the Phase II Storm Water Program of the Environmental Protection Agency (EPA) as administered by the

Montana Department of Environmental Quality
(MDEQ)."

SECTION 3: Amendment: Ordinance 10-13 and Section 13.32.030
of the Butte-Silver Bow Municipal Code (B-SB MC)
shall be and are hereby amended to read as
follows:

"13.32.030 Definitions.

For the purpose of this chapter, the following
terms phrases and words, and their derivatives
shall have the meaning given herein, except
where the context clearly indicates a different
meaning:

Accelerated erosion means erosion caused by
development activities that exceeds the natural
processes by which the surface of the land is
worn away by the action of water, wind, or
chemical action.

Applicant means a property owner or applicant of
a property owner who has filed an application
for a storm water management permit.

As-built plan means a set of engineering or site

drawings that delineate the specific permitted storm water management features as actually constructed.

Authorized enforcement agency means the Director, employees or designees of the Butte-Silver Bow Public Works Department are designated to enforce this chapter.

Best Management Practices (BMPs) means schedules of activities, prohibitions of practices, general good housekeeping practices, pollution prevention and educational practices, maintenance procedures, and other management practices to prevent or reduce the discharge of pollutants directly or indirectly to storm water, receiving waters, or storm water conveyance systems. BMPs also include treatment practices, operating procedures, and practices to control site runoff, spillage or leaks, sludge or water disposal, or drainage from raw materials storage.

Butte-Silver Bow means the local government of

the City and County of Butte-Silver Bow, Montana, including all officers, employees, agents, boards, departments, commissions and authorities and includes all of that area within its jurisdiction with authority to inspect or enforce storm water compliance.

Channel means a natural or artificial watercourse with a definite bed and banks that conveys flowing water continuously or periodically.

Construction activity means activities subject to the requirements of this chapter. These include construction projects resulting in land disturbance of 1-acre or more. Such activities include but are not limited to clearing and grubbing, grading, excavating, and demolition.

Dedication means the deliberate appropriation of property by its owner to general public use.

Drainage easement means a legal right granted by a landowner to a grantee allowing the use of private land for storm water management

purposes.

Hazardous materials means any material, including any substance, waste, or combination thereof, which because of its quantity, concentration, or physical, chemical, or infectious characteristics may cause, or significantly contribute to, a substantial present or potential hazard to human health, safety, property, or the environment when improperly treated, stored, transported, disposed of, or otherwise managed.

Illegal discharge means any direct or indirect non-storm water discharge to the storm water system, except as exempted in Article III of this chapter.

Illicit connections means an illicit connection is defined as either of the following:

- a. Any drain or conveyance, whether on the surface or subsurface, which allows an illegal discharge to enter the storm water system including but not limited to any

conveyances which allow any non-storm water discharge including sewage, process wastewater, and wash water to enter the storm water system and any connections to the storm water system from indoor drains and sinks, regardless of whether said drain or connection had been previously allowed, permitted, or approved by an authorized enforcement agency.

b. Any drain or conveyance connected from a commercial or industrial land use to the storm water system which has not been documented in plans, maps, or equivalent records and approved by an authorized enforcement agency.

Impervious cover means those surfaces that cannot effectively infiltrate rainfall (e.g., building rooftops, pavement, sidewalks, driveways. etc).

Industrial activity means activities subject to NPDES Industrial Permits as defined in 40 CFR, Section 122.26 (b)(14).

Land disturbing activity means any activity

which changes the volume or peak flow discharge rate of rainfall runoff from the land surface. This may include the grading, digging, cutting, scraping, or excavating of soil, placement of fill materials, paving, construction, substantial, removal of vegetation, or any activity which bares soil or rock or involves the diversion or piping of any natural or artificial watercourse.

Landowner means the legal or beneficial owner of land, including those holding the right to purchase or lease the land, or any other person holding proprietary rights in the land.

Low Impact Development (LID) means systems and practices that use or mimic natural processes that result in the infiltration, evapotranspiration or use of stormwater in order to protect water quality and associated aquatic habitat.

Maintenance agreement means a legally recorded document that acts as a property deed

restriction, and which provides for long-term maintenance of storm water management practices.

MS4 means Municipal Separate Storm Sewer as defined by the Environmental Protection Agency (EPA).

National Pollutant Discharge Elimination System (NPDES) Storm Water Discharge Permit means a permit issued by EPA (or by a State under authority delegated pursuant to 33 USC ' 1342(b)) that authorizes the discharge of pollutants to waters of the United States, whether the permit is applicable on an individual, group, or general area-wide basis. The Montana Department of Environmental Quality administers this program in Montana.

Non-point source pollution means pollution from non-discernable, unconfined, diffuse sources and shall include, but not be limited to, pollutants from agricultural, silvicultural, mining, construction, subsurface disposal, and urban runoff sources.

Non-storm water discharge means any discharge to the storm drain system that is not composed entirely of storm water.

Non-structural BMP means any institutional and pollution-prevention practice designed to prevent or minimize pollutants from entering stormwater runoff. They do not involve fixed, permanent facilities and typically consist of changing behavior through administrative regulation, persuasion, and/or economic means.

Off-site facility means a storm water management measure located outside the subject property boundary described in the permit application for land development activity.

Outfall means the place where a sewer, drain, or channel discharges.

Person means any individual, association, organization, partnership, firm, corporation or other entity recognized by law, and acting as either the owner or as the owner's agent. Butte-Silver Bow is considered a person for

purposes of this ordinance when acting as either the owner or as the owner's agent.

Pollutant means anything which causes or contributes to pollution. Pollutants may include, but are not limited to: paints, varnishes, and solvents; oil and other automotive fluids; non-hazardous liquid and solid wastes and yard wastes; refuse, rubbish, garbage, litter, or other discarded or abandoned objects, chapters, and accumulations, so that same may cause or contribute to pollution; floatables; pesticides, herbicides, and fertilizers; hazardous substances and wastes; sewage, fecal coliform and pathogens; dissolved and particulate metals; animal wastes; wastes and residues that result from constructing a building or structure; and noxious or offensive matter of any kind.

Responsible party means a business entity, franchised utility company, developer, landowner, contractor or holder of a building

permit who is required to comply with the terms of this chapter.

Stop work order means an order issued which requires that all land disturbance activity on a site be stopped.

Storm water means any surface flow, runoff, and drainage consisting entirely of water from any form of natural precipitation, and resulting from such precipitation.

Storm water system means publicly-owned facilities by which storm water is collected and/or conveyed, including but not limited to any roads with drainage systems, municipal streets, gutters, curbs, inlets, piped storm drains, pumping facilities, retention and detention basins, natural and human-made or altered drainage channels, reservoirs, and other drainage structures.

Storm water management means the use of structural or non-structural practices that are designed to reduce storm water runoff pollutant

loads, discharge volumes, and/or peak flow rates.

Storm water management facilities means those structures and facilities that are designed for the collection, conveyance, storage, treatment, and disposal of storm water runoff.

Storm water engineering report means a written document that details the Best Management Practices, use of structural or non-structural practices to be implemented by a person or business designed to reduce storm water runoff, pollutant loads, discharge volumes, and/or peak flow rates to the maximum extent practicable.

Structural BMP means any stationary or permanent BMP that is designed, constructed and operated to prevent to reduce the discharge of pollutants to stormwater.

Temporary erosion control devices means devices installed or practices implemented and maintained during land disturbance activities to prevent, minimize, or control the erosion and

deposit of soil materials.

Wastewater means any water or other liquid, other than uncontaminated storm water, discharged from a facility.

Watercourse: A natural or artificial channel through which water flows.

Water quality means those characteristics of storm water runoff from a land disturbing activity that relates to the physical, chemical, biological, or radiological integrity of water.

Water quantity means those characteristics of storm water runoff that relate to the rate and volume of the storm water runoff to downstream areas resulting from a land disturbance activity."

ARTICLE II: CONSTRUCTION/POST CONSTRUCTION STORM WATER

REQUIREMENTS

SECTION 4: Amendment: Ordinance 10-13 and Section 13.32.030 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

"13.32.210 Exemptions. The following development and other activities are exempt from the provisions of this Article:

A. A. Land disturbance activities on agricultural land for production of plants and animal useful to man (crops, dairy, poultry, livestock, etc.), except if the land disturbance includes the construction of a major building which requires the issuance of a building permit.

B. Land disturbing activities undertaken on forest land for the production and harvesting of timber and timber products.

C. Residential land disturbance activities that are less than 1-acre of disturbance and are not part of a subdivision or part of a commercial or industrial development.

D. Emergency land management practices posing an immediate danger to life or property, or substantial flood or fire hazards.

E. Any activity for which a permit or

other approval is required from the state or federal government, or is the subject of an administrative order, a consent decree, or an enforcement action pursuant to Title 75, chapter 5, part 4; Title 75, chapter 6; Title 75, chapter 10, Mont. Code Ann.; the federal Comprehensive Environmental Response, Compensation and Liability Act of 1980; 42 U.S.C. 9601 through 9675, as amended; or federal environmental, safety or health statutes and regulations."

SECTION 5: Amendment: Ordinance 10-13 and Section 13.32.220 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

"13.32.220 Permit Requirements. Landowners or responsible parties shall not receive any of the building, ~~grading~~ excavation or other land development permits required for a land disturbance activity without first meeting the

requirements of this Chapter.

A. Application Requirements. Any landowner or responsible party desiring a permit for a land disturbance activity shall submit to the Butte-Silver Bow Public Works" Department a Storm Water Management Permit Application on a form provided for that purpose. The permit application shall be accompanied by the following in order to be considered:

1. Storm Water Engineering Report; and
2. Maintenance Agreement.

The storm water engineering report and maintenance agreement shall be prepared to meet the requirements listed in the Attached Municipal Storm Water Engineering Standards document, which is included as Exhibit A and incorporated herein. These engineering standards will be updated periodically as determined necessary by the Butte Silver Bow Public Works Department. Land disturbance activities greater than 1-acre shall also comply

with requirements of the current MPDES general permit for storm water discharge associated with construction activity, ~~permit number MTR1000000~~.

B. Application Procedure.

1. Three copies of the Storm Water Management permit applications and accompanying information shall be filed with the Butte-Silver Bow Public Works Department on any regular business day.

2. A copy of this permit application shall be forwarded by the Butte-Silver Public Works Departments to all appropriate departments for review.

3. Within five (5) business days the Butte-Silver Bow Public Works Department shall inform the applicant whether the permit application is complete or additional information is needed.

4. Within twenty (20) business days of the receipt of a complete permit application, the Butte-Silver Bow Public Works Department

shall inform the applicant whether the application is approved.

5. If the permit is approved by the Butte-Silver Bow Public Works Department, the applicant can secure all appropriate development permits and proceed with the proposed project.

6. If the permit application is disapproved, the Butte-Silver Bow Public Works Department will provide a letter detailing the application deficiencies and the applicant may revise and resubmit the ~~submitted~~ application. If additional information is submitted, the Butte-Silver Bow Public Works Department shall have ten (10) business days from the date the additional information is received to inform the applicant that the application is either approved or disapproved.

7. The determination to disapprove of a permit application may be appealed as defined in subchapter 13.32.080 by filing a written notice of appeal within thirty (30) days of the

decision by the Butte-Silver Bow Public Works Department.

C. Application Review Fee. There will be no fee associated with the first submittal and review of the stormwater management permit application. If the permit application is disapproved, a letter will be provided detailing deficiencies in the application package. If an application is resubmitted and identified deficiencies are not addressed or further deficiencies are identified, applicant shall be charged a review fee of \$130.00, not to exceed a total of 8 hours. This fee must be paid prior to final approval and receipt of required permits. Each subsequent resubmittal shall be charged this additional review fee.

GD. Permit Duration. Permits issued under this section shall be valid from the date of issuance through the date the Butte-Silver Bow Public Works Department notifies the permit holder that all storm water management practices

have passed the final inspection required under permit conditions as defined in the Municipal Storm Water Engineering Standards."

ARTICLE III. ILLICIT DISCHARGE REQUIREMENTS

SECTION 6: Amendment: Ordinance 10-13 and Section 13.32.310 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

"13.32.310 Discharge Prohibitions.

A. Prohibition of Illegal Discharges. No person shall discharge or cause to be discharged into the municipal storm water system or watercourse any materials, including but not limited to pollutants or waters containing any pollutants, that cause or contribute to a violation of applicable water quality standards, other than storm water.

The commencement, conduct or continuance of any illegal discharge to the storm drain system is prohibited except as described as follows:

(1) The following discharges are exempt from discharge prohibitions established by this Chapter: landscape irrigation or lawn watering, diverted stream flows, rising ground water, ground water infiltration to storm drains, , air conditioning condensation, springs, , natural riparian habitat or wetland flows, fire fighting activities, and any other water source not containing pollutants.

(2) The following discharges are exempt from discharge prohibitions established by this Chapter with written permission from the Butte-Silver Bow Public Works Department: a discharge or flow from waterline flushing or disinfection that contains no harmful quantity of residual chlorine or any other chemical used in line disinfection, a discharge or flow of uncontaminated storm water or ground water pumped from an excavation, a discharge or flow from uncontaminated ground water, foundation or footing drains (not including active groundwater

dewatering systems), sump pumps, noncommercial or charity car washes, swimming pools (if dechlorinated) and discharges associated with dye testing.

(3) The prohibition shall not apply to any non-storm water discharge permitted under an MPDES permit, waiver, or waste discharge order issued to the discharger and administered under the authority of the Montana Department of Environmental Quality (MDEQ), provided that the discharger is in full compliance with all requirements of the permit, waiver, or order and other applicable laws and regulations, and provided that written approval has also been granted for any discharge to the storm water system by the Butte-Silver Bow Public Works Department.

B. Prohibition of Illicit Connections.

The construction, use, maintenance or continued existence of illicit connections to the storm water system is prohibited. This prohibition

expressly includes, without limitation, illicit connections made in the past, regardless of whether the connection was permissible under law or practices applicable or prevailing at the time of connection. A person is considered to be in violation of this Chapter if the person connects a line conveying an illegal discharge to the storm water system or allows such a connection to continue."

SECTION 7: Amendment: Ordinance 10-13 and Section 13.32.330 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

"13.32.330 Monitoring of Discharges.

A. Access to Facilities. The Butte-Silver Bow Public Works Department or its designated representative shall be permitted to enter and inspect facilities subject to regulation under this Chapter as often as may be necessary to determine compliance with this Chapter.

(1) If a discharger has security measures in force which require proper identification and clearance before entry into its premises, the discharger shall make the necessary arrangements to allow access to representatives of the Public Works Department.

(2) Facility operators shall allow the Public Works Department ready access to all parts of the premises for the purposes of inspection, sampling, examination and copying of records that must be kept under the conditions of an MPDES permit to discharge storm water, and the performance of any additional duties as defined by state and federal law.

(3) The Public Works Department shall have the right to set up on any permitted facility such devices as are necessary in its opinion to conduct monitoring and/or sampling of the facility's storm water discharge.

(4) The Public Works Department has the right to require the discharger to install

monitoring equipment as necessary. The facility's sampling and monitoring equipment shall be maintained at all times in a safe and proper operating condition by the discharger at its own expense. All devices used to measure storm water flow and quality shall be calibrated to ensure their accuracy.

(5) Any temporary or permanent obstruction to safe and easy access to the facility to be inspected and/or sampled shall be promptly removed by the operator at the written or oral request of the Public Works Department and shall not be replaced. The costs of clearing such access shall be borne by the operator.

(6) Unreasonable delays in allowing the Public Works Department access to a permitted facility is a violation of a storm water discharge permit and of this Chapter. The operator of a facility with a MPDES permit to discharge storm water associated with industrial activity commits an offense if the person denies

the Public Works Department reasonable access to the permitted facility for the purpose of conducting any activity authorized or required by this Chapter.

(7) If the Public Works Department has been refused access to any part of the premises from which storm water is discharged, and is able to demonstrate probable cause to believe that there may be a violation of this Chapter, the Department may seek issuance of a search warrant from any court of competent jurisdiction. Probable cause may include but is not limited to any evidence suggesting that a violation is occurring on the premises, the need to inspect and/or sample as part of a routine inspection and sampling program designed to verify compliance with this Chapter, or to protect the overall public health, safety, and welfare of the community."

SECTION 8: Amendment: Ordinance 10-13 and Section 13.32.340 of the Butte-Silver Bow Municipal Code (B-SB MC)

shall be and are hereby amended to read as follows:

"13.30.340 Requirement to Prevent, Control, and Reduce Storm Water Pollutants by the Use of Best Management Practices and/or Low Impact Development (LID).

A. Best Management Practices The Butte-Silver Bow Public Works Department may require Best Management Practices (BMPs) for any activity, operation, or facility which may cause or contribute to pollution or contamination of storm water, the storm water system, or waters of the United States. The owner or operator of a commercial or industrial establishment shall provide, at their own expense, reasonable protection from accidental discharge of prohibited materials, pollutants or other wastes into the municipal storm water system or watercourses through the use of structural and non-structural BMPs. Further, any person responsible for a property or premises, which is

or may be the location of a source of an illegal discharge, may be required to implement, at said person's expense, additional structural and non-structural BMPs to prevent the further discharge of pollutants to the storm water system. Compliance with all terms and conditions of a valid MPDES permit authorizing the discharge of storm water associated with industrial activity, to the extent practicable, shall be deemed in compliance with the provisions of this section. These BMPs shall be part of a storm water pollution prevention plan (SWPPP) as necessary for compliance with requirements of the MPDES permit.

B. Low impact Development The purpose of this section is to provide additional and optional stormwater management techniques beyond the standard Best Management Practices listed in Section 13.32.340 (A). These Low Impact Development (LID) techniques strive to mimic pre-disturbance hydrological processes by

emphasizing site conservation, use of on-site natural features, site planning, and distributed stormwater management practices. LID is encouraged for site development and redevelopment. Certain LID techniques may be used to fulfill the requirements set forth in the Butte-Silver Bow Municipal Storm Water Engineering Standards, as approved by the Public Works Director. LID is a requirement of the municipal separate storm sewer system (MS4), as such specific design considerations will be updated over time in the Butte-Silver Bow's Municipal Storm Water Engineering Standards.

SECTION 9: Amendment: Ordinance 10-13 and Section 13.32.360 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

"13.32.360 Watercourse Protection. Every person owning property through which a watercourse passes, or such person's lessee, shall keep and maintain that part of the watercourse within the

property free of trash, debris, excessive vegetation, and other obstacles that would pollute, contaminate, or significantly impact the flow of water through the watercourse. In addition, the owner or lessee shall maintain existing privately owned structures within or adjacent to a watercourse, so that such structures will not become a hazard to the use, function, or physical integrity of the watercourse. No construction or alteration of a watercourse is allowed without meeting the requirements of this chapter, as well as all required permits from other local, state and federal jurisdictions."

ARTICLE IV. STORM WATER FEES

SECTION 10: Amendment: Ordinance 10-13 and Section 13.32.420 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

"13.32.420 Purposes of the Fund. The Storm Water Utility Fund shall be used for the

following purposes:

A. All costs of administration and implementation of the Storm Water Utility Division, including the establishment of reasonable operating and capital reserves to meet unanticipated or emergency storm water management requirements.

B. The acquisition by gift, purchase or condemnation of real and personal property, and interests therein, necessary to construct, operate, and maintain storm water control facilities.

C. Engineering and design, debt service and related financing expenses, construction costs for new facilities, and enlargement or improvement of existing facilities.

D. Operation and maintenance of the storm water system.

E. Monitoring, surveillance, and inspection of storm water control facilities.

F. Water quality monitoring and water quality programs.

G. Retrofitting developed areas for pollution control.

H. Assessment, stormwater application and engineering report reviews, stormwater construction permit reviews, inspection and enforcement activities.

I. Billing and administrative costs.

J. Public education.

K. Other activities which are reasonably required."


SECTION 11: Amendment: Ordinance 10-13 and Section 13.32.430 of the Butte-Silver Bow Municipal Code (B-SB MC) shall be and are hereby amended to read as follows:

13.32.430 Applicability of Storm Water Utility Fee. Except as provided in Section 13.32.210, fees for collection and conveyance of storm water shall be imposed on the owners of all parcels within the City and County of Butte-

Silver Bow, which is hereby established as the Storm Water Utility District Boundary."


SECTION 12: Effective Date. This Chapter shall be in full force and effect from and after thirty (30) days after its passage and approval.

PASSED this 18th day of November, 2020.

DocuSigned by:


JOHN P. MORGAN
CHAIRMAN OF THE COUNCIL OF COMMISSIONERS

APPROVED this 18th day of Nov, 20²⁰.

DocuSigned by:


DAVE PALMER
CHIEF EXECUTIVE

ATTEST:

SALLY J. HOLLIS
CLERK AND RECORDER

DocuSigned by:


BY Sally Hollis
TITLE Clerk & Recorder

APPROVED AS TO FORM:

DocuSigned by:

Eileen Joyce

EILEEN JOYCE
COUNTY ATTORNEY

DocuSigned by:

Brendan McDonough

BRENDAN McDONOUGH
CHAIRMAN, JUDICIARY COMMITTEE



Butte-Silver Bow's Municipal Storm Water Engineering Standards

Prepared for:

Butte-Silver Bow Public Works Department

December 2020



TABLE OF CONTENTS

1	INTRODUCTION.....	1
2	COVERAGE AREAS.....	1
3	FORMS.....	1
4	EXEMPTIONS (AS REGULATED IN S.W. ORDINANCE 13.32.210)	2
5	APPLICABLE REGULATIONS AND ORDINANCES.....	2
5.1	CLEAN WATER ACT	2
5.2	MPDES MS4 PERMIT	3
6	LIABILITY	4
7	STORM WATER CONTROL AT CONSTRUCTION SITES.....	4
7.1	CONSTRUCTION PROJECT SWPPP – GREATER THAN ONE ACRE.....	4
7.2	CONSTRUCTION PROJECT BEST MANAGEMENT PRACTICE PLAN – LESS THAN ONE ACRE.....	5
7.3	COMPLIANCE.....	5
7.3.1	MINIMUM COMPONENTS OF SWPPP	5
7.4	SOURCE CONTROL AND WASTE BMP	6
7.4.1	EROSION CONTROL.....	6
7.4.2	SEDIMENT CONTROL.....	7
7.5	CONSTRUCTION BMP OPERATION AND MAINTENANCE SCHEDULE.....	8
8	PERMANENT STORM WATER MANAGEMENT—REPORTING REQUIREMENTS.....	8
8.1	ENGINEERING REPORT	9
8.1.1	GENERAL INFORMATION:	9
8.1.2	STORM DRAINAGE MAPPING AND CALCULATIONS:.....	9
8.2	PLANS.....	10
8.3	SPECIFICATIONS.....	11
8.4	LOW IMPACT DEVELOPMENT.....	11
8.5	ATTACHMENTS.....	11
8.5.1	NEW INFRASTRUCTURE OPERATION AND MAINTENANCE AGREEMENT	11



8.6	VARIANCES.....	12
8.7	PERFORMANCE BOND/SECURITY	12
8.8	PREPARATION BY A PROFESSIONAL ENGINEER	12
9	IMPLEMENTATION AND PROJECT CLOSURE.....	13
9.1	PLAN IMPLEMENTATION	13
9.2	INSPECTION AND CERTIFICATION	13
9.3	AS-BUILT PLANS.....	13
9.4	LANDSCAPING AND STABILIZATION REQUIREMENTS.....	13
9.5	POST CONSTRUCTION INFRASTRUCTURE ACCEPTANCE PROCEDURE ..	13
10	ANALYSIS REQUIREMENTS	14
10.1	HYDROLOGIC ANALYSIS & DESIGN.....	14
10.1.1	DESIGN STORMS	14
10.1.2	RATIONAL METHOD	15
10.1.2.1	PRECIPITATION INTENSITY VALUES TO MATCH TIME OF CONCENTRATION (TC).....	15
10.1.3	HYDROLOGIC MODELS	15
10.2	RUN-ON/RUN-OFF CAPACITY ANALYSIS.....	16
10.3	FLOODPLAIN/FLOODWAY ANALYSIS.....	17
11	INFRASTRUCTURE	17
11.1	HYDRAULIC ANALYSIS AND DESIGN.....	17
11.1.1	OPEN CHANNELS	17
11.1.2	STORM DRAIN OUTFALLS	17
11.1.3	CULVERTS & BRIDGES	17
11.1.3.1	HYDRAULIC CRITERIA - CULVERTS.....	17
11.1.3.2	HYDRAULIC CRITERIA - BRIDGES	17
11.1.4	STORM MAIN PIPING.....	18
11.1.5	DETENTION AND RETENTION FACILITIES	18
11.1.6	PONDS AND WATER QUALITY BMPS.....	19
11.1.7	INFILTRATION BMPS.....	19
11.2	NON-STRUCTURAL BMPS.....	20
11.3	RUNOFF TREATMENT BMPS.....	21
11.3.1	GENERAL	21



11.3.2	CONVENTIONAL POLLUTANT TREATMENT	22
11.3.2.1	OIL/WATER SEPARATION	22
11.3.2.2	NUTRIENT TREATMENT	22
11.4	DETENTION POND FACILITIES	23
11.4.1	DETENTION DESIGN CONSIDERATIONS	23
11.4.2	SITES WITH EXISTING STORM WATER DETENTION SYSTEMS	23
11.4.3	EMBANKMENTS	24
11.4.4	DETENTION POND SETBACKS	24
11.4.5	VEGETATION & LANDSCAPING	24
11.4.6	MULTI-PURPOSE USE	25
11.4.7	SAFETY	25
11.4.8	EMERGENCY OVERFLOW & SPILLWAYS	25
11.4.9	DETENTION STRUCTURE MAINTENANCE ACCESS	26
11.5	OUTFALLS	26
11.5.1	DESIGN CONSIDERATIONS	26
11.5.2	CONTROL STRUCTURES	26
11.5.3	ORIFICES	27
11.5.4	ENERGY DISSIPATION	27
11.5.5	MATERIALS	27
11.6	RETENTION SYSTEMS	27
11.6.1	RETENTION PONDS	27
11.6.2	INFILTRATION SYSTEMS	27
11.7	NON-GRAVITY SYSTEMS (PUMPS)	30
12	MINIMUM DESIGN STANDARDS – PIPE, CURB AND GUTTER AND OPEN CHANNEL INFRASTRUCTURE	30
12.1	ROAD SECTION	30
12.2	CURB AND GUTTER	30
12.3	OPEN CHANNELS	30
12.4	UNDERGROUND UTILITY SEPARATIONS AND MINIMUM CLEARANCES	30
12.5	TRENCH DESIGN	31
12.5.1	INSTALLATION OF STORM DRAINPIPE	32



12.5.2	PIPE BEDDING MATERIAL	32
12.6	CONNECTIONS/MODIFICATIONS TO PUBLIC DRAINAGE SYSTEM	32
12.7	STORM DRAIN PIPING	33
12.8	CULVERTS	34
12.9	MANHOLES, CATCH BASINS, AND INLETS	34
12.9.1	DESIGN CONSIDERATIONS	34
12.9.2	SPACING REQUIREMENTS	34
12.9.3	ADJUSTING MANHOLES AND CATCH BASINS TO GRADE	35
12.9.4	MATERIALS	35
12.10	SERVICE CONNECTIONS	36
12.11	RUNOFF CONTROL BEYOND THE PROPERTY LINE	36
12.11.1	DISCHARGE LOCATION	36
12.11.2	ALTERNATE DISCHARGE	37
12.11.3	TEMPORARY DISCHARGES TO THE SANITARY SEWER	37
13	MISCELLANEOUS DESIGN CONSIDERATIONS.....	37
13.1	TRENCH PLUGS	37
13.2	ENCASING REQUIREMENTS	37
13.3	LOCATORS	38
13.4	ABANDONING FACILITIES	38
13.5	PROTECTION OF WETLANDS AND RIPARIAN AREAS	38
13.6	EMERGENCY LAND MANAGEMENT PRACTICES	39
14	EASEMENTS.....	39
14.1	GENERAL	39
14.2	EASEMENT WIDTH	39
14.3	EASEMENT DOCUMENTATION	40
15	REFERENCES.....	41



LIST OF TABLES

TABLE 9-1. MS4 EVENT AND BUTTE-8S 24-HOUR PRECIPITATION DEPTHS	15
TABLE 9-2. BUTTE-8S PRECIPITATION DEPTHS AND INTENSITIES	15
TABLE 12-1. REQUIRED MINIMUM UTILITY CLEARANCES	31
TABLE 12-2. APPROVED INLET GRATES	35

LIST OF APPENDICES

APPENDIX A	DEFINITIONS
APPENDIX B	FORMS
APPENDIX C	BUTTE HILL SAMPLE SEED MIX



Prepared by:

Water & Environmental Technologies, Inc.

In cooperation with:

Deluxe Engineering and Construction

DOWL

Everly & Associates

Morrison-Maierle, Inc.

Pioneer Technical Services, Inc.

1 INTRODUCTION

It is the purpose of these Storm Water Engineering Standards to enact a comprehensive and coordinated storm water control program for the conservation and protection of land, water, public and private resources of Butte-Silver Bow (BSB) to:

- Encourage the use of land in accordance with its capabilities;
- Prevent or reduce degradation of streams, reservoirs, lands and lakes; and
- Protect and promote the health, safety, and general welfare of the people.

The intent of these standards is to establish uniform design practices; however, it does not replace the need for engineering judgment or preclude the use of information not specifically required.

The urbanized area of Silver Bow County consisting of Butte, Walkerville and the municipal and developed area of Summit Valley surrounding these communities are regulated for storm water discharge by the Montana Department of Environmental Quality (MDEQ) as required by the Clean Water Act (CWA). These standards are intended to conform to the current requirements promulgated under Phase II of the National Pollutant Discharge Elimination System (NPDES) regulations as related to small municipal separate storm sewers (MS4s) and to provide guidance to Owners, Engineers and Contractors designing, and performing construction activities in Butte-Silver Bow. This guidance is intended to set forth a uniform set of minimum guidelines that conform to accepted design principals, existing specifications and standards such as the Montana Public Works Standards Specifications (MPWSS), and current storm water practices in BSB.

Definitions of commonly used terms can be found in **Appendix A** and reference documents are detailed in Section 14.

2 COVERAGE AREAS

According to the DEQ, the Butte MS4 regulated area is based on the 2010 urban limit boundary. However, Butte-Silver Bow is a combined city-county government; as a result, these engineering standards apply to all of Silver Bow County. The MS4 regulated area is the Butte Urban Limits Boundary (regulated area).

Refer to: <http://deq.mt.gov/Water/StormWater/StormSystems> for current information from the MDEQ regarding storm water.

Certain design standards may be modified to conform to the character of the historic district of uptown Butte. These standards may include curbing, inlet grates and other surface treatments visible to the public.

3 FORMS

The forms associated with the Storm Water Engineering Standards are as follows.

- Form #1 – Storm Water Management Permit Application;
- Form #2 – Storm Water Management Permit Checklist;
- Form #2a – Storm Water Management/BMP Maintenance Agreement;
- Form #2b – Construction Project Best Management Practice Plan (For Projects Less than 1-acre);

- Form #3 – Excavation and Dirt Moving Permit Application (contact the BSB Planning Department 406-497-6250 to determine if required); and
- Form #4 – Variance for Storm Water Permit Application.

Copies of all forms are included in **Appendix B**.

4 EXEMPTIONS (AS REGULATED IN S.W. ORDINANCE 13.32.210)

The following development activities are exempt from Ordinance provisions:

- Land disturbance activities on agricultural land for production of plants and animal useful to man (crops, dairy, poultry, livestock, etc.), except if the land disturbance includes the construction of a major building which requires the issuance of a building permit.
- Land disturbing activities undertaken on forest land for the production and harvesting of timber and timber products.
- Land disturbance activities that are less than one acre of disturbance and are not part of a subdivision or part of a commercial or industrial development.
- Emergency land management practices posing an immediate danger to life or property, or substantial flood or fire hazards.

Street and parking overlays are considered to be routine maintenance and are not considered to be redevelopment and, therefore, are not subject to permanent storm water control.

5 APPLICABLE REGULATIONS AND ORDINANCES

5.1 CLEAN WATER ACT

The Clean Water Act (CWA) is a law enacted by Congress and signed by the President that establishes environmental programs, including the National Pollutant Discharge Elimination System (NPDES) program, to protect the Nation's waters and directs EPA to develop, implement, and enforce regulations consistent with this law.

The 1972 amendments to the Federal Water Pollution Control Act (known as the Clean Water Act or CWA) provide the statutory basis for the NPDES permit program and the basic structure for regulating the discharge of pollutants from point sources to waters of the United States. Section 402 of the CWA specifically required EPA to develop and implement the NPDES program.

Final Rule for Regulations for Revision of the Water Pollution Control Program Addressing Storm Water Discharges NPDES (Phase II MS4 Regulation):

Phase II regulations expand the existing NPDES storm water program (Phase I) by addressing storm water discharges from small MS4s and construction sites that disturb 1 to 5 acres. Although these sources are automatically designated by the rule, the rule allows for the exclusion of certain sources from the national program based on a demonstration of the lack of impact on water quality, and the inclusion of others based on a higher likelihood of localized adverse impact on water quality. The regulations also exclude from the NPDES program storm water discharges from industrial facilities that have "no exposure" of industrial activities or materials to storm water.

5.2 MPDES MS4 PERMIT

In 1990, EPA promulgated rules establishing Phase I of the National Pollutant Discharge Elimination System (NPDES) storm water program. The Phase I program for MS4s requires operators of “medium” and “large” MS4s, that is, those that generally serve populations of 100,000 or greater, to implement a storm water management program to control polluted discharges from these MS4s. The Stormwater Phase II Rule extends coverage of the NPDES storm water program to certain “small” MS4s defined as located outside of an urbanized area serving a jurisdiction with a population of at least 10,000 and a population density of at least 1,000 people/square mile. EPA defines an MS4 in 40 CFR 122.26(b)(8) as:

***Municipal Separate Storm Sewer (MS4)** means a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains).*

EPA’s Phase II Stormwater Rule requires applicable Municipal Separate Storm Sewer Systems (MS4) to obtain permit coverage under the Montana Pollutant Discharge Elimination System (MPDES) and develop a Storm Water Management Program (SWMP) to improve the Nation’s waterways by reducing the quantity of pollutants that storm water runoff transports into storm drain systems during storm events. Butte-Silver Bow, a Phase II MS4, is covered under MTR040006. Common pollutants include oil and grease from roadways, pesticides from lawns, sediment from construction sites, and trash/debris, such as cigarette butts, paper wrappers, and plastic bottles.

The Phase II Rule defines a small MS4 Storm Water Management Program as a program comprising six elements called *minimum control measures* that, when implemented in concert, are expected to result in significant reductions of pollutants discharged into receiving waterbodies. BSB has completed a SWMP as part of its Phase II MS4 permit coverage (*Storm Water Management Program for the Butte MS4, November 2016*). This document is available on BSB storm water website (<https://bsbstormwater.org/construction/>).

Within the Butte MS4 is the Butte Priority Soils Operable Unit (BPSOU), a federal Superfund site from historic mining activities in the Butte area. Within the BPSOU, sediment carrying heavy metals may also be a potential pollutant to area receiving waters. Additional storm water controls may be necessary within this area. When deposited into nearby waterways through MS4 discharges, these pollutants can impair the waterways, thereby discouraging recreational use of the resource, contaminating drinking water supplies, and interfering with the habitat for fish, other aquatic organisms, and wildlife.

Operators of regulated small MS4s are required to design their programs to:

- Reduce the discharge of pollutants to the “maximum extent practicable” (MEP);
- Protect water quality;
- Satisfy the appropriate water quality requirements of the Clean Water Act; and
- Address *Non-Numeric Technology-Based Effluent Limits*.
 - As defined in the most current Montana DEQ General Permit for Storm Water Discharges Associated with Construction Activity Sections 2.1 Technology-Based Effluent Limits, 3.3 Site Description, and 3.10 Site Maps.

These engineering standards are intended to conform to the requirements in the current MDEQ General Permit for Storm Water Discharge Associated with Small Municipal Separate Storm Sewer System.

6 LIABILITY

Neither the approval of a plan or any other action of Butte-Silver Bow under the provisions of these Standards shall relieve any person from the responsibility for damage to any person or property otherwise imposed by law, nor impose any liability upon BSB for damage to any person or property.

7 STORM WATER CONTROL AT CONSTRUCTION SITES

As required by the Storm Water Ordinance, storm water Best Management Practices (BMPs) shall be implemented to protect water quality in accordance with these Engineering Standards and Chapter 10 of the HEC-22 Manual. These standards define approved water quality BMPs for new development and redevelopment construction projects in Butte-Silver Bow.

Construction storm water BMPs will be described in a written Storm Water Pollution Prevention Plan (SWPPP) or Construction Project Best Management Practice Plan. All construction on public rights-of-way shall be completed in accordance with BSB's municipal standards and the procedures and methods set forth in the Montana Public Works Standard Specifications (MPWSS) as modified herein.

A copy of the approved Engineering Report and SWPPP or Construction Project Best Management Practice Plan must be kept on-site during construction or be available upon request. The applicant is responsible for obtaining any other required or related permits prior to beginning construction.

Wastewater from construction cleaning operations shall not be discharged to the BSB storm drainage system, BSB sanitary sewer system, surface waters, or natural wetlands. Owner and/or contractor shall be responsible for cleanup of mud and debris tracked onto city streets.

7.1 CONSTRUCTION PROJECT SWPPP – GREATER THAN ONE ACRE

Construction projects with land disturbance activities greater than one acre shall submit a copy of their MPDES *General Permit for Storm Water Discharge Associated with a Construction Activity* number MTR1000000, Notice of Intent (NOI), Storm Water Pollution Prevention Plan (SWPPP), and permit approval letter from MDEQ. Information and submittal requirements can be found on the MDEQ website: <http://deq.mt.gov/Water/StormWater/StormSystems>.

The following forms are required for construction projects located in Butte-Silver Bow County.

- Form #1 – Storm Water Management Permit Application,
- Form #2 – Storm Water Management Permit Checklist, and
- Form #2a – Storm Water Management/BMP Maintenance Agreement.

Copies of Forms #1, #2, & #2a are included in **Appendix B**.

Construction site storm water controls shall be implemented for all projects regardless of land disturbance size.

7.2 CONSTRUCTION PROJECT BEST MANAGEMENT PRACTICE PLAN – LESS THAN ONE ACRE

Owners of construction projects with a land disturbance of less than one acre must prepare Form #2b – Construction Project Best Management Practice Plan (For Projects Less than 1-acre) and submit with the storm water engineering report. The intent this form is to determine the storm water management measures necessary for the proposed project to ensure storm water runoff is managed. A copy of Form #2b is included in **Appendix B**.

7.3 COMPLIANCE

BSB reserves the right to perform audits at construction projects regardless of the disturbance size. If problems are noted at construction sites, BSB may consider sediment releases illicit discharges per the Butte-Silver Bow Storm Water Ordinance No. 10-13, Municipal Code 13.32.020(E), 13.32.080(C), and 13.32.080(E).

MDEQ may perform an audit for construction projects with a land disturbance of greater than one acre.

7.3.1 MINIMUM COMPONENTS OF SWPPP

The construction SWPPP must describe BMPs to be implemented to control erosion. Several strategies are discussed in this section of the Engineering Standards. The following minimum components shall be addressed along with a schedule for implementation, unless approved otherwise in writing by the Butte-Silver Bow Public Works Department (BSBPWD):

- A description of construction practices designed to preserve existing vegetation where practicable and revegetate open areas as soon as possible after grading or construction. In developing vegetative practices, the operator shall consider temporary seeding, permanent seeding, mulching, sod stabilization, vegetative buffer/filter strips, grassed waterways, erosion control blankets and tree and shrub planting;
- A description of temporary structural practices (BMPs) which indicates how, to the degree practicable, the contractor will divert, store, or otherwise limit runoff from exposed areas of the site. In developing structural practices the operator shall consider the appropriateness of: silt fences, straw fiber rolls/wattles, earth dikes, brush barriers, drainage swales, check dams, subsurface drains, drop structures, rock outlet protection, drain inlet and outlet protection, temporary drain diversions, sediment traps, temporary sediment basin, infiltration trenches or basins, and retaining walls. All temporary control structures shall be removed once permanent vegetation and site stabilization has been achieved;
- Where practical, use gravel surfacing on access entrance and exit drives and parking areas to reduce the tracking of sediment onto public or private roads. All unpaved roads on the site carrying more than 25 vehicle trips per day should be graveled; and
- When trucking saturated soils from site, use either leak-proof trucks or loads must be required to drain until drippage has been reduced to less than 1 gallon per hour before leaving the site.

Visible or measurable erosion which leaves the construction site is prohibited. Visible or measurable erosion is defined as:

- Deposits of mud, dirt, sediment or similar material exceeding 1 cubic foot in volume in any area of 100 square feet or less on public or private streets, adjacent property, or into the storm and surface water system, either by direct deposit, dropping, discharge, or as a result of the action of erosion; or
- Evidence of concentrated flows of storm water over bare soils; turbid or sediment laden flows; or evidence of on-site erosion such as rivulets or rills on bare soil slopes, where the flow of water is not filtered or captured on the site using the techniques in the approved erosion control plan; or
- Earth slides, mud flows, earth sloughing, or other earth movement which leaves the property; or
- Measured turbidity greater than 280 NTUs as required by the EPA under the Clean Water Act.

Contractors must address controls for the following pollutants: fuel (gasoline and diesel), oils, grease, solvents, paints, concrete truck wash down material, raw materials, litter, and debris.

7.4 SOURCE CONTROL AND WASTE BMP

Source control and waste BMPs are designed to minimize use and storage of deleterious products at the construction site, promote site management/good housekeeping, and operation and maintenance procedures. The goal of source control BMPs is to keep contaminants associated with a project's activities from entering the storm water system rather than removing contaminants (i.e., runoff treatment later), thereby reducing the amount of pollutants transported by storm water. The source control and waste BMPs aimed at activities that produce the contaminants are preferred by Butte Silver Bow over treatment BMPs because of lower costs.

As stated in the SWPPP requirements, contractors need to provide source controls for the following pollutants:

- fuel (gasoline and diesel),
- oils,
- grease,
- paints,
- solvents,
- concrete truck wash down,
- raw materials for manufacturing concrete (sand, aggregate, and cement),
- litter,
- debris, and
- sanitary wastes.

7.4.1 EROSION CONTROL

The objective of erosion control is to minimize erosion of disturbed areas during project construction. Erosion and subsequent sediment transport can significantly impact the water quality of receiving surface waters. Sediment loads to surface waters increase turbidity, increase water temperatures, degrade fish habitat and spawning areas, and depress dissolved oxygen concentrations. Toxic substances, trace metals and nutrients, which absorb to soil particles, can be transported into surface waters. The addition of these substances to surface waters degrades the existing water quality.

The following are the main erosion control principles required at a construction site:

- Construction plans must conform to existing topography and soil type to create the lowest practical erosion potential.
- To the maximum extent practicable, natural vegetation shall be retained, protected, and supplemented. Temporary vegetation or mulching shall be employed to protect exposed areas during development.
- Stripping of vegetation, re-grading and other development activities shall be conducted in such a manner so as to minimize erosion, and the duration of exposure to erosive elements shall be kept to a practicable minimum.
- Cut and fill operations must be kept to a minimum and may not endanger adjoining property. Fill operations may not encroach upon natural water courses or constructed channels in a manner that adversely affects other property owners.
- Grading equipment must cross flowing watercourses via bridges or culverts except when such methods are not feasible.
- Design and install BMPs to minimize runoff velocities and retain runoff on-site. BMPs can be used to effectively control runoff velocity and remove 80 to 90 percent of the sediment from runoff.
- Perimeter control practices can protect the disturbed area from runoff, and prevent damage to areas downgradient of the construction site. A sediment and runoff barrier surrounding the disturbed area prevents construction site runoff from moving off-site and fouling surface waters downstream.
- Stabilize disturbed areas immediately after final grade has been attained. Exposed soil is subject to erosion from rainfall, wind, and vehicle traffic. Soil stabilization BMPs should be applied as soon as possible after the land is disturbed. Temporary stabilization practices may include seeding, mulching, and erosion control blankets or mats.
- Coordinate disturbance activities with seasonal precipitation and growing patterns to reduce the exposure of disturbed ground to the elements, and to minimize the window between disturbance and revegetation.
- Develop a schedule and implement a BMP inspection and maintenance program. BMPs must be routinely inspected and maintained to ensure that they are operating effectively and optimally, both during and after construction.

7.4.2 SEDIMENT CONTROL

Under no condition shall sediment be discharged to surface waters or natural wetlands. Installation of temporary sediment ponds, sedimentation tanks, filter vaults, or other sediment control facilities is required to control sediment laden storm water during construction.

All types of ponds (detention, retention, extended, and wet) provide adequate suspended sediment removal if properly designed and maintained. Other sediment control BMPs include:

- Sedimentation tanks,
- Filter vaults,
- Infiltration trenches, and
- Infiltration basins.

Filter strips and grassed swales provide minimal sediment control. Porous pavement is not an acceptable method for controlling or treating runoff.

If ponds or infiltration structures cannot be used at the site for sediment control, the Owner of the project and their Engineer will need to consult with Butte-Silver Bow Public Works to determine alternative sediment control mitigation measures such as source control, temporary paving, preservation of existing vegetation, etc.

7.5 CONSTRUCTION BMP OPERATION AND MAINTENANCE SCHEDULE

All construction BMPs as detailed in the MPDES SWPPP or Form #2b – Construction Project Best Management Practice Plan (For Projects Less than 1-acre) must be inspected 14 days during construction and after precipitation events greater than 0.25 inches or weekly. An inspection and maintenance log shall be maintained by the Contractor and shall be provided to BSBPWD upon request. A copy of Form #2b is included in **Appendix B**.

Temporary BMPs must be removed before the implementation of permanent vegetation and/or permanent structural BMPs.

8 PERMANENT STORM WATER MANAGEMENT—REPORTING REQUIREMENTS

A storm water engineering report shall be prepared by a Professional Engineer for any engineered storm water structure, conveyance or study as required by the BSB Storm Water Ordinance. The report is required with all permit applications and must include sufficient information to evaluate: the environmental characteristics, potential impacts, impact on water resources, and the effectiveness of the measures proposed for managing storm water generated at the proposed project site. The intent of this planning process is to determine the type of storm water management measures necessary for the proposed project and ensure adequate planning for management of storm water runoff from future development.

All drainage reports must include the design calculations necessary to support the proposal. The selection of water quality BMPs must be completed by going through the selection process in HEC-22, Chapter 10.1, in conjunction with Section 13 (Easements) of these standards. Approval will be issued when final, complete detailed plans and specifications have been submitted to the reviewing authority and found to be satisfactory, as defined in the BSB Storm Water Ordinance.

One copy of the checklist, application, engineering report, plans, and specifications must be submitted to BSB for review. The engineering checklist and application form are located on the BSB Storm Water website (<https://bsbstormwater.org/construction/>). Plans and specifications may be stamped “Preliminary – Not for Construction” but must identify the engineer of record. Upon approval, BSB will request additional copies of the final stamped engineering report, plans, and specifications for record retention.

Storm water engineering reports should incorporate the following:

- Engineering Report (including a summary of the basic design),
- General layout (including drainage patterns and drainage structures),
- Plans and specifications, and
- Attachments as appropriate.

8.1 ENGINEERING REPORT

The engineering report for storm water projects shall present the following information:

8.1.1 GENERAL INFORMATION:

- A. Identification of the project,
- B. Physical address of the site where work is proposed, and
- C. Name, mailing address, and telephone number of all persons having a legal interest in the property and the tax reference number and parcel number of the property or properties affected.

8.1.2 STORM DRAINAGE MAPPING AND CALCULATIONS:

- A. Describe existing conditions including structures, basins, bypass areas, flow type and flow paths, pervious/impervious areas, slopes, vegetation/surface and CN numbers, soil type(s), constants used (s,n,k...), upgradient off-site flow routing conditions,
- B. Describe proposed developed conditions including structures, basins, bypass areas, compensatory areas, flow type and flow paths, pervious/impervious areas, slopes, vegetation/surface and CN numbers, constants used (s,n,k...), upgradient off-site flow routing, source control BMP's runoff control, runoff treatment, nutrient control, frontage improvements and associated storm improvements, time of concentration, storage volume, release rates, and overflow route capacity. State in the report if above items are not necessary,
- C. State runoff control/treatment design assumptions. Describe method of analysis. Selection of water quality treatment BMPs must follow the process in HEC-22 Chapter 10.1,
- D. Delineation of drainage areas within the project boundaries, estimates of peak flows generated within these drainage areas, and estimates of flow volumes if detention ponds or other storage facilities are included in the design,
- E. Delineation of drainage areas outside the project that flow through the project area, and estimates of peak flows generated within these drainage areas,
- F. For flows that originate outside the project area, provisions for passing these flows through the project without flooding structures or drainfield sites (at a recurrence interval of the 100-year, 24-hour storm), and without overtopping of roadways (at a recurrence interval of the ten-year, 24-hour storm event),
- G. Retain and use Low Impact development (LID) practices that infiltrate or capture for reuse the first 0.5 inches of rainfall from the 24-hour storm. The runoff generated from this storm must be entirely retained on site,
- H. For flows that originate within the project, provisions for detaining or retaining these flows, so that the peak flow (from Section 9.1.1) that leaves the project area after development does not exceed the peak flow before development (defined as existing condition),

- I. Where storm drainage is intended to be discharged into the ground, locations of nearby (within 200 feet) wells and drainfields that may be impacted, or a statement that there are no wells or drainfields nearby,
- J. If a storm water management control measure depends on the hydrologic properties of soils (e.g., infiltration basins), then a geotechnical report shall be submitted. The geotechnical report shall be based on on-site boring logs, test pit profiles, percolation test results, or appropriate NRCS soils information. Soil borings or test pits may be required by the BSBPWD if deemed necessary to determine the suitability and distribution of soil types present for the control measure,
- K. Show calculations, figures and/or model input and output parameters required to support the design including basin summary, time of concentration, weighted CN numbers, percent impervious area, level pool routing summary, stage-discharge and stage-storage tables, volume correction, and conveyance system capacity calculations. Suggested CN values are given in HEC-22 Table 3-6. Calculations should be included as an appendix, and
- L. A detailed plan must be submitted for management of vegetation at the site after construction is complete, including who will be responsible for the maintenance of vegetation at the site and what practices will be employed to ensure that adequate vegetative cover is preserved.

8.2 PLANS

Plans for storm drainage improvements as prepared by a Professional Engineer shall include the following:

General layout including:

- A. Suitable title,
- B. Name of entity responsible for maintaining the storm drainage improvements (if other than Butte Silver Bow),
- C. Scale, in feet,
- D. Legend,
- E. North arrow,
- F. Name of the design engineer of record and date of design,
- G. Legible prints,
- H. Existing and proposed two-foot contours,
- I. Delineation (and total acreage) of the project area and construction disturbance area,
- J. Location, nature and size of existing storm drainage facilities, if any, including drainage structures under existing roadways, and
- K. Elevations shall be based on NAVD 88 datum.

Detailed plans, including:

- A. Location, size, type, slope and minimum cover of any proposed pipes,
- B. Location and details of any proposed structures,
- C. Direction of drainage flow paths with slope, flow type, surface type, and run length,
- D. Location, size, length and slope of any proposed storm drain trunk lines,
- E. Location and details of any proposed detention or retention ponds,

- F. Location and details for erosion control (temporary and permanent) at each location where storm drainage leaves the project (outfall), and at any other location where erosive velocities may occur. Information on soil types at these locations will be necessary to determine associated erosive velocities,
- G. Site property boundary, basin/sub-basin/bypass area boundaries, wetlands, sensitive area buffers and setbacks, easements, two-foot contours, etc.,
- H. Total area and the amount of pervious and impervious area in each basin/sub-basin/bypass area,
- I. Storm water discharge path from the project boundary to the nearest existing municipal storm water structure or natural water body, and
- J. The location of existing and proposed utilities (Section 11.4).

8.3 SPECIFICATIONS

Complete, detailed, technical specifications shall be supplied for the proposed drainage project.

8.4 LOW IMPACT DEVELOPMENT

Low impact development (LID) refers to systems and/or practices that use or imitate natural processes resulting in the infiltration, evapotranspiration or reuse of stormwater to protect water quality and aquatic habitat. As per MS4 Permit (MTR04000) requirements detailed in 5(b)(iii) Post-Construction Site Storm Water Management in New and Redevelopment, LID practices must infiltrate or capture for reuse the first 0.5 inches of rainfall from the 24-hour storm. The runoff generated from this storm must be entirely retained on site. Resources for LID include <https://www.epa.gov/nps/urban-runoff-low-impact-development> and Montana Post-Construction Storm Water BMP Design Guidance Manual September 2017 available on the following website <https://bsbstormwater.org/wp-content/uploads/2018/01/Montana-Post-Construction-Storm-Water-BMP-Design-Guidance-Manual.pdf>.

8.5 ATTACHMENTS

The following attachments shall be submitted as required in the Storm Water Ordinance:

- A. Three original signed copies of Form #2a – Storm Water Management/BMP Maintenance Agreement, and
- B. Approved MDEQ Notice of Intent (NOI) Permit Authorization Letter or Form #2b – Construction Project Best Management Practice Plan (For Projects Less than 1-acre).

Copies of Form #2a & Form #2b are included in **Appendix B**.

8.5.1 NEW INFRASTRUCTURE OPERATION AND MAINTENANCE AGREEMENT

For privately maintained storm water systems, an operation and maintenance (O&M) agreement and schedule for source control, runoff control and runoff treatment BMPs must be approved by the BSBPWD prior to the completed storm drainage system. For private storm water facilities, the party responsible for O&M must be identified. If storm water facilities are to be maintained by BSB, the O&M schedule shall provide information regarding any unique facilities or features not normally used by BSB. The agreement must allow BSB access for inspections and must be recorded with the property deed. This agreement is bound to the property in perpetuity.

Form #2a – Storm Water Management/BMP Maintenance Agreement is included in **Appendix B**. Three copies of the O&M agreement with original signatures must be submitted with the storm water engineering report.

8.6 VARIANCES

Variances from the engineering report requirements may be granted by the BSBPWD. Form #4 – Variance for Storm Water Permit Application (**Appendix B**) may be granted for the following situations:

- A. Insignificant increase in impervious surfaces** A variance may be granted by the BSBPWD if the project increases the impervious surfaces less than 1,500 square feet (within the regulated area) or less than 2,500 square feet (outside the regulated area) for the proposed development, including all future phases. This Variance Request form is included in **Appendix B** or can be found on the Butte-Silver Bow Stormwater website <https://bsbstormwater.org/>. An engineering report is not required for this variance.
- B. Retention on entire parcel.** Retention is required for the water quality storm event per MS4 permit language: *For new development or redevelopment projects greater than or equal to one acre, the program shall include a process, where such practices are practicable, to require implementation of low impact development practices that infiltrate, evapo-transpire, or capture for reuse the runoff generated from the first 0.5 inches of rainfall from a 24-hour storm preceded by 48 hours of no measurable precipitation.* Engineer must clearly define the “Project Area” and describe why retention from the entire parcel is not possible in the engineering report. Maps must clearly show drainage direction and areas of non-capture.

8.7 PERFORMANCE BOND/SECURITY

The BSBPWD requires the submittal of a performance security or bond prior to issuance of a permit to ensure that the storm water practices are installed by the permit holder to comply with the approved storm water engineering report. The amount of the installation performance security shall be the total estimated construction cost of the storm water management practices approved under the permit, plus 25 percent. The performance security shall contain forfeiture provisions for failure to complete work specified in the storm water engineering report. The installation performance security shall be released in full upon submission of as-built plans and written certification by a Professional Engineer that the storm water practice has been installed in accordance with the approved plan and other applicable provisions of this ordinance. The BSBPWD will make a final inspection of the storm water practice to ensure that it complies with the approved plan and the provisions of this ordinance.

8.8 PREPARATION BY A PROFESSIONAL ENGINEER

All storm water engineering reports, plans, specifications, deviations from these standards, and inspections or certifications shall be signed and stamped by a Professional Engineer qualified to conduct erosion control and storm water design work in the State of Montana.

9 IMPLEMENTATION AND PROJECT CLOSURE

9.1 PLAN IMPLEMENTATION

Each landowner or responsible party shall implement and maintain storm water management facilities and temporary erosion and sediment control measures to minimize and control erosion during any land disturbance activities. During construction, appropriate phasing and implementation of BMP's is required. Inspection of all temporary control measures may be conducted during active construction. All storm water management facilities will be constructed according to the design plans and specifications.

9.2 INSPECTION AND CERTIFICATION

The applicant must notify the BSBPWD prior to the commencement of construction. Inspections of the storm water management system construction may be conducted by BSBPWD personnel at its discretion to determine the overall effectiveness of the storm water engineering report. All inspections shall be documented and shall contain the following information:

1. The date and location of the inspection.
2. Whether construction complies with the approved storm water engineering report.
3. Variations from the approved construction specifications.
4. Any violations that exist.

9.3 AS-BUILT PLANS

Applicants are required to submit as-built plans for any on-site or off-site storm water management practices after final construction is completed. The plan must show detailed final specifications for all storm water management facilities and must be certified by a Professional Engineer. A final inspection by the BSBPWD is required prior to the release of any performance securities.

9.4 LANDSCAPING AND STABILIZATION REQUIREMENTS

Any area of land from which the natural vegetative cover has been either partially or wholly cleared or removed by development activities shall be revegetated within 30 days of the completion of construction. All components of the landscaping plan, submitted as part of the storm water engineering report must be completed.

9.5 POST CONSTRUCTION INFRASTRUCTURE ACCEPTANCE PROCEDURE

Prior to use or occupancy of any portion of a phased development, storm drainage facilities shall be completed and operational to provide conveyance, runoff control, and water quality treatment for the phase for which occupancy is requested.

Prior to the installation of impervious surfacing, detention facilities shall be operational. Contractor shall provide Manufacturer's Certificate of Compliance when requested by Butte-Silver Bow for all pipe, fittings, precast concrete products, castings, and manufactured fill materials used in the project.

Storm water manholes must be leak tested per the requirements in MDEQ Circular 2, Section 34.7, Inspection and Testing, and accepted by the engineer of record.

Leak testing of storm water piping is not required; however, deflection and alignment shall be inspected or tested per the engineer's specifications or MPWSS sections 02720 and 02730 where applicable.

Documentation for the newly installed drainage facilities required by these standards or issued permits shall be submitted and approved prior to construction acceptance. Prior to the final inspection, the contractor shall clean the storm drain system and any off-site drainage systems affected by construction activities by a method approved by BSB.

10 ANALYSIS REQUIREMENTS

10.1 HYDROLOGIC ANALYSIS & DESIGN

All storm water volume calculations shall be designed using a hydrologic analysis based on hydrograph methodology. Peak flow calculations and volume calculations are governed by the procedures and methods outlined in Chapter 3.3 of the HEC-22 Manual or accepted modeling software (Section 9.1.3).

10.1.1 DESIGN STORMS

The design storm for all hydrograph analyses shall be a 24-hour duration, standard SCS Type I rainfall distribution resolved to ten-minute time intervals.

Precipitation depths for 24-hour storm duration at selected recurrence intervals and the MS4 Event are detailed in Table 9-1. Table 9-2 for the MDT Weather Station for Butte-8S (MDT Hydraulics Manual, Appendix B) specifies precipitation depths and intensities at differing recurrence intervals and storm durations.

Existing and post-development conditions shall be analyzed to quantify stormwater runoff rates. Post-development conditions shall be analyzed for volumes and treatment needs for the following storms:

- MS4 Event (water quality design storm, on-site retention);
- Two-year, 24-hour storm (on-site detention, stream bank protection);
- Ten-year, 24-hour storm (on-site detention, on-site inlets, lateral piping and conveyances);
- 25-year, 24-hour storm (on-site detention, municipal trunk main piping and conveyances); and
- 100-year, 24-hour storm (on-site detention, floodplain delineations and regional ponds).

Table 9-1. MS4 Event and Butte-8S 24-Hour Precipitation Depths

Recurrence Interval	24-Hour Precipitation Depth (inches)
MS4 Event	0.50
2-year	1.26
10-year	1.70
25-year	1.92
50-year	2.08
100-year	2.24

Table 9-2. Butte-8S Precipitation Depths and Intensities

Station Information	Storm Duration	Depth at Selected Recurrence Intervals (inches)						Intensity at Selected Recurrence Intervals (inches/hour)					
		2-yr	5-yr	10-yr	25-yr	50-yr	100-yr	2-yr	5-yr	10-yr	25-yr	50-yr	100-yr
Butte-8S CDDP: 241309 Elev: 5,700 ft Modified PDR: 56 Type: 2nd Order	5-min	0.19	0.28	0.33	0.40	0.45	0.50	2.32	3.32	3.98	4.82	5.44	6.05
	10-min	0.28	0.40	0.49	0.59	0.66	0.74	1.70	2.43	2.91	3.52	3.98	4.43
	15-min	0.34	0.49	0.59	0.71	0.81	0.90	1.38	1.97	2.36	2.86	3.23	3.59
	20-min	0.37	0.53	0.63	0.76	0.86	0.96	1.10	1.58	1.89	2.29	2.59	2.88
	25-min	0.39	0.56	0.67	0.81	0.92	1.02	0.94	1.34	1.61	1.95	2.20	2.45
	30-min	0.41	0.59	0.71	0.86	0.97	1.08	0.83	1.19	1.42	1.72	1.94	2.17
	35-min	0.43	0.61	0.73	0.88	1.00	1.11	0.73	1.04	1.25	1.52	1.71	1.91
	40-min	0.44	0.62	0.75	0.91	1.02	1.14	0.65	0.94	1.12	1.36	1.54	1.71
	45-min	0.45	0.64	0.77	0.93	1.05	1.17	0.60	0.85	1.02	1.24	1.40	1.56
	50-min	0.46	0.65	0.78	0.95	1.07	1.19	0.55	0.78	0.94	1.14	1.28	1.43
	55-min	0.46	0.66	0.80	0.96	1.09	1.21	0.51	0.72	0.87	1.05	1.19	1.32
	1-hr	0.47	0.67	0.81	0.98	1.11	1.23	0.47	0.67	0.81	0.98	1.11	1.23
	2-hr	0.55	0.77	0.92	1.11	1.25	1.38	0.28	0.39	0.46	0.55	0.62	0.69
	3-hr	0.63	0.83	0.97	1.14	1.26	1.39	0.21	0.28	0.32	0.38	0.42	0.46
	6-hr	0.76	0.95	1.08	1.24	1.35	1.47	0.13	0.16	0.18	0.21	0.23	0.24
	12-hr	1.02	1.30	1.49	1.72	1.90	2.07	0.09	0.11	0.12	0.14	0.16	0.17
	24-hr	1.26	1.52	1.70	1.92	2.08	2.24	0.052	0.063	0.071	0.080	0.087	0.093

Source: MDT Hydraulics Manual, Appendix B

10.1.2 RATIONAL METHOD

The Rational Method may be used in predicting a conservative peak flow rate to determine the required capacity for storm water laterals, trunk mains and culverts for homogenous drainage areas. The calculated time of concentration with the Rational Method shall be between 5 minutes and 20 minutes and the appropriate intensity shall be used. Interpolation of the intensities in Table 9-2 may be necessary. The Rational Method may be used to calculate the peak discharge in conjunction with a hydrograph method to calculate the run-off volume (retention and detention); or, the hydrograph method may be used solely for all calculations.

10.1.2.1 PRECIPITATION INTENSITY VALUES TO MATCH TIME OF CONCENTRATION (TC)

Short duration precipitation intensity values which must match time of concentration values are in Table 9-2. The minimum time of concentration used to calculate intensity and peak flow is 5 minutes.

10.1.3 HYDROLOGIC MODELS

Storm drain systems may be designed using hydrograph-based computer modeling methods or the Rational Method as permitted in these standards.

Acceptable computer modeling packages:

- TR-20 (or any software that uses this program),
- TR-55 (or any software that uses this program),
- EPA Storm Water Management Model (SWMM),
- Autodesk Storm and Sanitary Analysis® Hydraflow, and/or
- HydroCAD®.

The list provided may not be all inclusive but serves as a general guideline. Other programs not included in this list may be acceptable and can be reviewed and approved for use on a case-by-case basis. It is incumbent on the licensed engineer to select the appropriate modeling program and apply it to the design situation. Input and output parameters from the selected model must be provided.

Time of Concentration Calculations - Use the procedures and methods outlined in Chapter 3.2.2.3 of the HEC-22 Manual or the calculations provided in TR-55.

Curve Numbers - Use curve numbers set forth in Table 3-6 of the HEC-22 Manual. For single-family residential plat developments, use Table 3-6 of the HEC-22 Manual as minimum values. Storm water system designs shall address future build-out of the proposed development. Impervious areas of future development may justify higher curve numbers and greater impervious area coverage. For commercial and multi-family residential developments, use actual project values.

Soil Types - Use site-specific geotechnical information (when available) or the Soil Survey – Butte Silver Bow County Area (MT670) – prepared by the Natural Resources Conservation Service (NRCS) to identify the hydrologic soil group.

10.2 RUN-ON/RUN-OFF CAPACITY ANALYSIS

Offsite capacity analysis is required when either the location of discharge or rate of discharge will be changed by a proposed development.

On a map (minimum USGS 1:24000 Quadrangle Topographic Map) delineate the upgradient drainage areas to the site and to the downstream system. Physically inspect the existing on- and off-site drainage systems and investigate any known problems. Contact BSBPWD and nearby property owners regarding historical on- and off-site drainage issues. To ensure that the development does not create downstream storm water issues, the analysis must extend from the proposed project discharge location (outfall) to the downstream location where the site runoff discharges into the existing municipal storm water structure or downgradient areas.

Describe the makeup and general condition of the existing and proposed drainage system. Include information such as pipe sizes, channel characteristics, and drainage structures. Address anticipated drainage problems in the storm water engineering report.

For any existing and/or predicted drainage problems identified in the analysis, develop hydrographs or peak flow rates for the 100-year, 24-hour design storm events for the (total

composite) drainage area tributary to that location for existing runoff conditions. Then evaluate impacts of adding the controlled peak runoff from the proposed project development to this existing peak runoff from the drainage area tributary to these problem drainage locations.

10.3 FLOODPLAIN/FLOODWAY ANALYSIS

As of this printing, the Flood Insurance Rate Maps (FIRM) and Flood Boundary Floodway Maps (from "The Flood Insurance Study for Butte-Silver Bow, Montana," dated January 2012, and the "Floodplain Management Study, Big Hole River, Silver Bow County Montana") are the existing floodplain references. Floodplain and floodway analyses require the most current official maps for determination of floodplain/floodway location and the ordinances in Title 18 for associated requirements.

11 INFRASTRUCTURE

11.1 HYDRAULIC ANALYSIS AND DESIGN

All structures shall be designed using proper materials, sizing and appurtenances to provide for a 75-year design life unless otherwise noted.

11.1.1 OPEN CHANNELS

Use the criteria set forth in Chapter 5 of the HEC-22 Manual for open channel flow capacity analysis.

11.1.2 STORM DRAIN OUTFALLS

Use methods set forth in Chapter 7.1.5 of the HEC-22 Manual as modified herein.

The orientation of the outfall should be pointed in the downstream flow direction and must include considerations for scour at the outlet.

11.1.3 CULVERTS & BRIDGES

Culvert and bridges shall be sized to accommodate the peak runoff from a 100-year, 24-hour storm event. Culvert and bridge designs shall be submitted and stamped by a Montana Professional Engineer. Cross-drain culverts outside of a designated floodplain area may use the 50-year, 24-hour storm event, provided that the roadway is not overtopped.

11.1.3.1 HYDRAULIC CRITERIA - CULVERTS

All applications requiring culverts larger than 24" shall be hydraulically designed. Use methods set forth in Chapter 9 of the MDT Drainage Manual as modified herein to design culverts. Determine capacity by analyzing inlet, outlet, and barrel controls.

When an abrasive bed load is anticipated or when velocities exceed ten feet per second, protective measures shall be implemented to minimize pipe damage and provide for a minimum 75-year design life.

11.1.3.2 HYDRAULIC CRITERIA - BRIDGES

Bridges shall conform to Montana Department of Transportation requirements.

11.1.4 STORM MAIN PIPING

A computer model that accounts for backwater impacts and pressure flow is recommended. Refer to HEC-22 Manual, Section 7 for design parameters for a basic storm drainpipe capacity analysis. Use Table 7-7 of HEC-22 for minimum pipe slopes based on pipe size and flow.

Storm drain piping infrastructure shall have non-pressurized (non-surcharged) flow during the 25-year design storm; except that the last pipe run upgradient of a detention facility or open outfall (into a stream or lake) may be inundated during the 100-year event to a maximum distance of 200 linear feet, so long as all the other conditions of these Engineering Standards are met. This applies for outfalls into a stream or lake where the outfall elevation is set at the approximate bankfull water surface elevation (two-year runoff event).

The flows computed at structures (manholes and catch basins) may be used to estimate the water surface profile along the pipe system.

When an abrasive bed load is anticipated or when velocities exceed ten feet per second, protective measures shall be implemented to minimize pipe damage and provide for a minimum 75-year design life.

11.1.5 DETENTION AND RETENTION FACILITIES

The design of storm water detention and retention facilities must consider both water quality and storm water routing for the entire parcel. Storm water shall be routed through a catch basin or pre-sediment basin prior to discharging to the pond to facilitate maintenance (i.e. removal of transported sediments and debris).

The 2-year, 10-year, 25-year, and 100-year design storms at a 24-hour duration shall be detained for runoff control for the entire parcel. The MS4 storm event (0.50 inches) shall be retained to address water quality concerns. Use a computer model that generates an inflow hydrograph and uses the outlet geometry, including the weir and/or orifice, and the discharge pipe to determine the outlet capacity.

When existing conditions make storm water detention impossible for some portion of a site, compensatory storage volume and reduction of the release rates may be allowed if the bypass area and detention system are tributary to the same drainage basin both prior to and after development. The peak rate of runoff (developed condition) from the bypass areas shall be subtracted from the allowable release rate to determine the detention system release rate. The runoff from the entire site must not exceed the pre-development release rate.

Runoff control systems shall be designed to maximize reliability, minimize maintenance needs, maximize the distance between the inlet and outlet to improve runoff quality, minimize hazards to persons or property (both on-site and off-site), minimize nuisance problems, and reduce the risk of failure.

In areas of high groundwater, groundwater collection system flows shall bypass the storm water detention system.

Runoff control facilities proposed to serve multiple sites are subject to all of the engineering and design requirements in the Storm Water Ordinance and these Standards. For phased

developments, conceptual site plans for the entire site to be served by the proposed storm water facilities shall be submitted to Butte-Silver Bow for review, in addition to a detailed engineering design for the first project phase. Detailed design plans will be submitted as appropriate for future project phases. Construction of storm water facilities must occur in conjunction with each project phase.

The 100-year water surface shall not surcharge roof, footing and yard drains, or under-drains. Runoff control facilities serving the public right-of-way shall be owned and operated by BSB and shall be separate from private on-site systems. If storm water facilities will be owned and operated by BSB, runoff from the right-of-way and private properties may be combined and controlled in a single facility. Private detention systems may accommodate public drainage (e.g., from a public right-of-way) if a hold harmless agreement is completed by the Owner and recorded against the property, and the proposal meets all the other design requirements of the Utility.

Drainage basins may be considered separate if tributary areas drain to different storm water conveyance networks via drainage routes that remain separate for a minimum of ¼-mile downstream.

11.1.6 PONDS AND WATER QUALITY BMPs

The following are the peak reduction and water quality BMPs permissible by the BSBPWD. Refer to Section 10 of the HEC-22 Manual for additional information regarding these BMPs.

- **Extended Detention Dry Ponds** are depressed basins that are designed to temporarily store storm water for a minimum of 24 hours and for a maximum of 48 hours following a storm event. These storm water facilities typically do not impound water or have a free water surface between storm events.
- **Wet Ponds / Retention Basins** are designed to store a permanent pool of water between storm events.
- **Constructed Wetlands** are similar to wet or dry ponds with the exception that they are planted with wetland and/or riparian vegetation to provide storm water treatment.
- **Water Quality Catch Basin Filters** are commercially available for specific pollutants, litter, or oil and grease.

11.1.7 INFILTRATION BMPs

The following are the infiltration BMPs that are permissible by the BSBPWD. Storm water infiltration by its nature typically resolves surface water quality impacts. However, consideration must be given to the potential for creating groundwater quality impacts with these types of BMPs. Section 10 of the HEC-22 Manual contains some additional information regarding these BMPs.

- **Infiltration Basin** is similar in appearance to dry ponds and consists of a shallow impoundment that detains and infiltrates runoff into permeable soils.
- **Underground Infiltration** is a temporary storage and infiltration of runoff in an infiltration chamber located beneath an engineered layer of soil and vegetation. Design dimensions should consider having the largest surface dimension of the underground infiltration greater than the depth. If the depth is greater than the largest surface

dimension all appropriate regulations must be followed regarding Class V Injection Wells. <https://www.epa.gov/uic/federal-requirements-class-v-wells>

- **Infiltration Trenches** are shallow trenches which have been backfilled with rock and have positive drainage. An infiltration trench may be used as part of a larger storm drain system (like a commercial parking lot), or it may be located at the outlet of a roof downspout.
- **Dry Well / Seepage Pit** is typically a smaller underground infiltration system designed to temporarily store and infiltrate runoff from a building or structure. Design dimensions should consider having the largest surface dimension of the well greater than the depth. If the depth is greater than the largest surface dimension all appropriate regulations must be followed regarding Class V Injection Wells. <https://www.epa.gov/uic/federal-requirements-class-v-wells>
- **Constructed Filters** are structures or excavated areas containing a layer of sand, compost, organic material, peat, or other filter media that reduce pollutant levels in storm water runoff by filtering sediments, metals, hydrocarbons, and other pollutants.
- **Vegetated Swales** are broad, shallow, trapezoidal or parabolic channels, with vegetation (trees, shrubs, and/or grasses). Swales attenuate and/or infiltrate runoff, allowing some pollutants to settle out in the process. In steeper slope situations, check dams may be used to enhance attenuation and infiltration.
- **Vegetated Filter Strips** are permanent, maintained strips of planted or indigenous vegetation located between nonpoint sources of pollution and receiving water bodies for the purpose of removing or mitigating the effects of nonpoint source pollutants such as nutrients, pesticides, suspended solids.
- **Infiltration Berm & Retentive Grading** is a mound of compacted earth with gently sloping sides to detain storm water runoff and promote infiltration. These structures can be used in conjunction with swales to allow for detention and infiltration during storm events.

11.2 NON-STRUCTURAL BMPS

Non-structural BMPs focus on preserving open space, protecting natural systems, and incorporating existing landscape features such as wetlands and stream corridors into a site plan to manage storm water at its source. Focus should be placed on clustering and concentrating development, minimizing disturbed areas, and reducing the size of impervious areas. The following lists common non-structural BMPs that should be implemented on all sites to the maximum extent practicable:

1. Preserving open spaces and utilizing existing natural features and systems;
2. Limit impervious area;
3. Managing storm water as close to the source as possible;
4. Sustaining the hydrologic balance of surface and ground water;
5. Disconnecting, decentralizing and distributing runoff sources and discharges;
6. Source control of potential pollutants;
7. Appropriate construction sequencing and planning;
8. Good housekeeping and pollution prevention strategies on construction sites;
9. Integrating storm water management into the initial site design process; and
10. Inspecting and maintaining all BMPs.

11.3 RUNOFF TREATMENT BMPS

11.3.1 GENERAL

Runoff treatment BMPS are designed as part of the on-site storm water system and must treat the MS4 water quality design storm (0.50 inches). As per MS4 permit, Section 5(b)(iii), page 29 of 63, post-construction storm water management controls must be designed to infiltrate, evapo-transpire, and/or capture for reuse.

Runoff treatment BMPS are categorized by the type of contaminants most effectively removed. These categories are:

- Conventional Pollutant Treatment designed to remove particulates and contaminants typically associated with particulates, such as heavy metals.
- Oil/Water Separation designed to remove and contain oil.
- Nutrient Treatment designed to remove suspended and dissolved nutrients.

Follow these steps to determine which treatments are required for a specific development or redevelopment proposal.

- Determine if the proposed project is subject to runoff treatment requirements.
- Determine if nutrient treatment or oil/water separation is required for the proposed project.
- Select the appropriate BMP(s) to treat contaminants anticipated from the proposed project. Documentation of treatment efficiencies must be provided.
- Incorporate runoff treatment BMPS into the design of the on-site storm water system. Note that several of the allowable BMPs can also be designed to meet runoff control requirements.
- The Montana Section 303(d) List (of impaired waterbodies) needs to be referenced when planning a proposed project. Any implications to a waterbody on the list should be noted in the drainage report.

There are a number of common and practical BMPS for runoff treatment depending on: the treatment area, depth to groundwater, slope, soil type, geometric constraints, etc. Table 10-1 in the HEC-22 manual provides a summary of runoff treatment BMPS summarized in this list:

- Biofiltration,
- Infiltration Trench,
- Infiltration Basin,
- Grassed Swales (with Check Dams),
- Filter Strips,
- Water Quality Inlets,
- Detention Ponds,
- Retention Ponds,
- Extended Detention/Retention Ponds, and
- Detention/Retention Ponds with Wetland Bottoms.

Runoff treatment facilities for the right-of-way shall be owned and operated by Butte-Silver Bow and shall be separate from private on-site systems. Maintenance agreements between Butte Silver Bow and other government agencies (such as MDT) may be necessary. In a development where the storm water facilities will be owned and operated by BSB, runoff from the right-of-way and private properties may be combined and treated in a single facility.

If "clean" runoff is routed to the water quality facility, those flows must be included in the sizing calculations for the facility. Drainage from landscaped and vegetated areas, especially areas in native vegetation, should not be mixed with untreated runoff from streets and driveways, if practical. Once runoff from non-contaminant generating areas is combined with runoff from contaminant-generating areas, it cannot be discharged without treatment.

Drainage basins may be considered as separate if tributary areas drain to different storm water conveyance networks via drainage routes that remain separate for a minimum of ¼-mile downstream.

Proprietary BMPs shall be evaluated on a case-by-case basis through the review of the engineering report.

11.3.2 CONVENTIONAL POLLUTANT TREATMENT

Runoff from all pollutant generating sources must be treated using appropriate treatment BMPs. Conventional pollution-generating surfaces typically include driving surfaces (streets and roads), uncovered parking areas, driveways, sidewalks, rooftops, landscaping, and uncovered storage areas for wastes, materials, equipment, etc.

11.3.2.1 OIL/WATER SEPARATION

There are three types of oil/water separation BMPs:

- Spill Control (SC) separators are effective at retaining small spills, coarse sediments and floating debris.
- American Petroleum Institute (API) separators remove and contain dispersed oil, floating debris, and spills.
- Coalescing plate (CP) separators remove dispersed oil, and floating debris, and contain spills.

It is incumbent on the design Engineer, in consultation with BSBPWD, to determine the appropriate type of oil water separator for the project.

Location Requirements for Oil/Water Separators

Locate the oil/water separator upstream from the detention system, or immediately before leaving the site if there is no detention system. If there are multiple outfalls into the detention system or water quality facilities (other than oil/water separators), then an oil/water separator must be included in the last catch basin in each tributary line draining a potential spill area.

11.3.2.2 NUTRIENT TREATMENT

Nutrient removal from storm water is difficult and can be very expensive. The best way to remove nutrients from storm water is to prevent them from entering the storm water system.

Therefore, source control is the best mechanism for addressing nutrients in storm water. Land uses with potentially nutrient-rich runoff include but are not limited to nurseries, gardening supplies, animal care and boarding facilities, golf courses, parks, sports fields, livestock stables, and pastures, etc.

Source control strategies may include:

- Design of new facilities and storm water structures to prevent comingling of nutrient rich water and storm water runoff,
- Proper timing and application rate of fertilizers,
- Proper watering (to prevent overwatering and runoff) of fertilizer/nutrient rich areas, and
- Buffer strips between nutrient rich areas and storm water channels/infrastructure.

11.4 DETENTION POND FACILITIES

11.4.1 DETENTION DESIGN CONSIDERATIONS

Upgradient, off-site runoff must bypass the proposed detention facilities, if possible. However, if the existing 100-year, 24-hour peak runoff rate from the upgradient, off-site area is less than 50 percent of the allowable release rate for the 100-year, 24-hour design storm event of the proposed project, then upgradient runoff will be allowed. Existing water quality treatment must also remain unchanged.

The detention pond outlet shall include debris barriers or trash racks to protect the outlet from blockage or plugging.

11.4.2 SITES WITH EXISTING STORM WATER DETENTION SYSTEMS

When runoff control is required on a site with an existing detention system, the design Engineer may choose one of the following options:

- Retain the existing detention system, modify the control structure and increase volume to meet the current requirements for runoff control and retention;
- Retain the existing detention system to control runoff from existing impervious surfaces and design a second system to meet current requirements to control runoff and meet retention requirements from new portions of the development; or
- Replace the existing detention with a system designed to meet current runoff control and retention requirements for both existing and proposed conditions.

When modifying existing detention systems, all other requirements for detention systems in these standards shall be met.

Existing storm water detention ponds may be used as interim sedimentation facilities during construction. They must be cleaned and restored to approved plan conditions following completion of all construction activities.

11.4.3 EMBANKMENTS

Embankment material for detention ponds shall conform to best engineering practices and guidelines. Pond vegetation should be established whenever practical for erosion control. Fill placed around structures in the pond embankment shall be placed in 12-inch maximum lifts and compacted to 95 percent of ASTM D- 1557.

The maximum embankment height is measured from the down-slope toe to the crest of the embankment.

All embankments for detention facilities six feet and higher shall be designed, inspected and certified by a licensed and qualified Professional Engineer who shall submit a letter certifying that all embankment design requirements have been met during embankment construction.

Appropriate design features shall be used on all conveyance pipes and trenches within the embankment to prevent embankment piping failures from seepage along the outlet pipe.

Ponds may be designed with retaining walls only as approved by Butte-Silver Bow Public Works on a case-by-case basis. Public safety shall be a primary design consideration.

11.4.4 DETENTION POND SETBACKS

Detention ponds shall not be located:

- within the 1:1 plane from the pond bottom to the finished grade at an adjacent building; and
- within the 1:1 plane from the pond bottom to the property line when an easement is not provided on the adjacent property; and
- where such facilities interfere with other underground utilities.

The top of a cut embankment and the toe of a fill embankment shall be setback at least five feet from property lines.

For ponds where the maximum design water depth is less than three feet deep, the minimum recommended bottom width is six feet.

For ponds where the maximum design water depth is three feet deep and greater, the minimum recommended bottom width should be 12 feet to allow maintenance.

The pond bottom should be sloped at recommended minimum of 0.5 percent towards the outlet for drainage to help facilitate maintenance.

11.4.5 VEGETATION & LANDSCAPING

Vegetation on pond embankments shall be limited to shallow rooted varieties as deep rooted vegetation can affect the integrity of a pond embankment. Deciduous shrubs and shrub/trees may be used in other areas to provide habitat and for aesthetic purposes.

All pond landscaping shall provide for slope stability, erosion control, and low maintenance. Landscape materials shall be fully compatible with storm water detention facility use, including runoff treatment.

Floatable or erodible material (i.e., wood chips, beauty bark, straw mulch, etc.) shall not be used in pond interiors. Vegetation shall be placed into topsoil above or adjacent to the engineered pond embankment.

If detention pond vegetation shall be maintained by the BSB Public Works, landscaping shall be non-irrigated, low maintenance and drought tolerant native plant species. Lawn or turf grass is not allowed. Utilize native plant species to the maximum extent practicable. A sample Butte Hill seed mix is included in **Appendix C**.

For Butte-Silver Bow maintained facilities, all plant material shall be guaranteed for a period of one year after acceptance. Defective materials shall be promptly replaced by similar species and size. The guarantee period may be extended for those defective materials which are replaced.

11.4.6 MULTI-PURPOSE USE

Detention facilities designed for multiple-use (neighborhood parks, open space, play areas, picnic areas, etc.) are allowed but must be approved by BSBPWD.

Storage for runoff from more frequent storms shall be stored separately from the multiple use areas. At a minimum, the detained volume for the two-year, 24-hour design storm shall be used to size the separate facilities.

All multi-use amenities shall be anchored to prevent floatation. Maintenance of multi-use amenities must be included in the Maintenance Agreement for the proposed development and approved by Butte-Silver Bow during the design process.

11.4.7 SAFETY

The design engineer must consider public safety for the design of swales, retention, and detention ponds. This includes but is not limited to fencing, barricades, and signage to protect the public from drowning, vehicle and property damage, and other public health and safety concerns.

11.4.8 EMERGENCY OVERFLOW & SPILLWAYS

Use the criteria set forth in Chapter 8.4.4.4 of the HEC-22 Manual as modified herein.

All detention storage facilities shall include a provision for non-erosive control of overflows. Overflow design must protect adjacent and downstream properties from damage. Calculations and data to support the design shall be provided in the engineering report.

Surface detention ponds shall provide a minimum of two controlled emergency overflows - the primary overflow in the control structure and the secondary overflow at the engineered embankment.

Each storage facility shall have at least one surface overflow structure unless the storage facility fully retains the 100-year, 24-hour design storm in which the retention facility must have at least one emergency overflow structure.

11.4.9 DETENTION STRUCTURE MAINTENANCE ACCESS

All storm water detention system control structures shall be accessible for maintenance and operation.

In new subdivisions, control structures, which are not abutting a roadway, shall be provided with dedicated tracts at least 15 feet wide to accommodate maintenance vehicles. The minimum clear driving width shall be 12 feet.

Maintenance access to the bottom of the detention pond is required when the bottom width is 15 feet or greater and/or when the height of the interior pond embankment/wall is greater than four feet. The grade of the access ramp shall be no steeper than 20 percent.

Maximum access road grades shall be 15 percent.

Gates and/or removable bollards are required to restrict access, as necessary, to drainage facilities. Cables and/or chains stretched across access roads are not acceptable.

11.5 OUTFALLS

11.5.1 DESIGN CONSIDERATIONS

Storm drain pipelines shall not be installed aboveground and shall be buried in accordance with the manufacturer's specifications and these Engineering Standards.

Conveyance systems downstream of detention facilities or water quality treatment facilities shall be designed to prevent backwater conditions.

The use of pumped systems or backflow preventers shall not be used to prevent flooding due to backwater conditions.

Each runoff control facility shall provide emergency storage of at least ten percent of the 100-year, 24-hour design storm volume or a minimum of 0.5 feet deep on the site prior to discharging runoff to a safe overflow route. The overflow route shall have the capacity for the 100-year, 24-hour flow in the event of overflow. Overflows shall be routed to the municipal storm drainage system, or an alternative overland flow discharge shall be identified and shown on the plan.

11.5.2 CONTROL STRUCTURES

Use the criteria and methods set forth in Chapter 8 of the HEC-22 Manual except as modified herein.

Precast concrete products for control structures shall comply with the MPWSS.

Ponds four feet deep or greater to be maintained by Butte-Silver Bow shall be equipped with a slide gate. Ponds less than four feet deep can utilize an orifice plate to control discharge.

The minimum clearance between the rim of the overflow standpipe and the bottom side of the structure's top slab shall be a minimum of 0.5 feet.

The minimum clearance between the flow restrictor (standpipe, orifices, shear gate, etc.) and the steps/ladder rungs shall be two feet.

11.5.3 ORIFICES

Orifices must be designed using best engineering practices in material use and construction. The design must consider screening to eliminate plugging and other maintenance issues. Orifices less than two inches in diameter are prone to plugging and should be avoided.

11.5.4 ENERGY DISSIPATION

Energy dissipation must be provided when exit velocities are in excess of ten feet per second. When discharging to an existing ditch, swale, or stream, energy dissipation is required to minimize erosion and scour. Energy dissipation measures shall be designed pursuant to FHWA HEC-14, "Hydraulic Design of Energy Dissipators for Culverts and Channels," as modified herein.

11.5.5 MATERIALS

Acceptable pipe materials for all outfall sections of storm water pipe shall include those listed in Section 11 of these Standards, except PVC pipe is not recommended due to ultraviolet light sensitivity and degradation.

11.6 RETENTION SYSTEMS

11.6.1 RETENTION PONDS

Retention ponds must have the capacity to fully detain the 100-year, 24-hour design storm and infiltrate within 72 hours. A routing diagram must show the discharge location for storm water flows that exceed the 100-year, 24-hour storm event. Provisions must be made so that storm water run-on is routed around the project.

Retention ponds shall have the same design considerations as detention ponds except they will not have an outlet structure. Retention ponds will have an emergency spillway and are subject to all other requirements within these Standards.

11.6.2 INFILTRATION SYSTEMS

Use the criteria and methods set forth in Chapter 10 of the HEC-22 Manual as modified herein.

All storm water shall be routed through a catch basin prior to discharging to detention vaults or pipes to facilitate the removal of sediments and debris. Soil capabilities must be evaluated by a geotechnical investigation or an infiltration test.

Infiltration Design Considerations

Infiltration systems for runoff control shall be designed to infiltrate the 100-year, 24-hour design storm volume in 24 hours or less, after the end of the storm.

The Engineer shall demonstrate through 1) infiltration testing; 2) soil logs; and 3) a written opinion of a licensed Professional Engineer, that the site is suitable for an infiltration system. Specifically, the soils are permeable, seasonal high groundwater levels or bedrock will not affect the performance of the infiltration system. The infiltration rate shall be evaluated at a depth equal to the proposed bottom grade of the system.

A detention system (storage) may be used in conjunction with the infiltration system to meter flows at a rate that can be infiltrated.

The seasonal high groundwater, bedrock, or other impermeable layer shall be a minimum of five feet below the bottom of all infiltration systems. Historical groundwater monitoring data can be used in lieu of on site groundwater monitoring.

A 1.75 safety factor shall be applied to the lowest measured infiltration rate.

Infiltration facilities shall not be located: 1) within 20 feet of any structure, property line, protected area or another infiltration system; or 2) within the 1:1 plane from the bottom edge of the excavation to the finished grade at the structure foundation, whichever is greater, except as stated herein.

Locations of wells and drainfields within 200 feet of the infiltration system that may be impacted must be identified in the engineering report and shown on the plan sheets.

Infiltration facilities shall be setback at least 50 feet from downhill slopes which are 15 percent or greater. Infiltration areas shall not be: 1) driven on or across by any vehicles or equipment, 2) used for material storage or stockpiles, or 3) used for vehicle or equipment parking, unless specifically designed for these purposes.

Approval of an infiltration system obligates the owner to repair, replace, or reconstruct the infiltration system if it fails to operate as designed. The operation and maintenance agreement for an infiltration system shall include such a provision. The Engineering Report will include inspection requirements and timing (i.e., semi-annual, annual) for infiltration systems.

Geotechnical Report Requirement

An adequate number of test holes shall be located over the proposed site to provide representative data for the final layout of the development. At a minimum, test holes shall be located in a grid of 50 feet by 50 feet in the infiltration area. Test hole locations shall be clearly identified in the geotechnical report and labeled on the drainage plan.

Soil logs must be submitted to describe soil type and depth and a site map shall be submitted showing the location of each test hole.

Borings or test pits shall extend at least three feet below the bottom of roof downspout systems and five feet below the bottom of all other infiltration facilities. Soil logs shall include the depth to the seasonally high ground water table and impervious strata. Seasonal water table elevation measurements shall be made bi-weekly during the period when the water table elevation is expected to be at its maximum (April 15 through July 30).

The geotechnical report shall address the potential impact of the infiltration system on both on-site and off-site downgradient areas.

During the course of construction, the design engineer shall conduct an inspection of the soil after the system is excavated and before the gravel backfill is placed to confirm that suitable soils are present.

Infiltration Test Requirement

The design infiltration rate shall be determined using the procedure outlined in DEQ Circular 4, Appendix A.

Infiltration Structure Setbacks

Underground detention or infiltration structures shall not be located:

- Underneath any surface building or structure (e.g. buildings, sheds, decks, carports, retaining walls, etc.);
- Within the 1:1 plane from the bottom edge of the vault or the bottom of the excavation at the outside diameter for tanks, to the finished grade at an adjacent structure foundation;
- Within the 1:1 plane from the bottom edge of the vault or the bottom of the excavation at the outside diameter for tanks, to the property line when an easement is not provided on the adjacent property; and
- Where such facilities interfere with other underground utilities.

If vaults are constructed aboveground, visual screening and landscaping must be provided.

Infiltration Maintenance Access

Infiltration system components shall be accessible for periodic inspection and routine maintenance.

For infiltration systems which are not abutting a roadway, the minimum clear driving width shall be 12 feet.

For roof downspout infiltration systems, access allowances for maintenance and construction equipment shall be made to facilitate routine maintenance and potential future reconstruction.

Underground detention facilities are subject to confined space entry regulations and shall be designed to meet all OSHA safety requirements for safe inspection and maintenance.

Access structures at each end of the facility shall be required. Spacing between access openings shall not exceed 50 feet. Covers, grates, and hatches shall be bolt locking. If the vault or pipe contains cells, a minimum of one access per cell is required.

Access openings shall be at least 24 inches (diameter) and centered over a ladder/steps. For control structures, accesses must be located so an eight-inch rigid Vactor[®] tube can reach the sump directly from the top, and so that a person entering the structure can step onto the ladder or step onto the floor. The opening shall allow visual inspection of the restrictor pipe (if used), while maintaining vertical Vactor[®] truck access to the sump area. To achieve both requirements, it may be necessary to increase the control structure size to provide two 24-inch (diameter) access openings or a hatched cover that conforms to the loading requirements given the proposed location.

Orifice elbows shall be located on the side of the standpipe nearest the ladder for clear visual inspection from above.

Gates and/or removable bollards may be required to restrict access to drainage facilities. Cables and/or chains stretched across access roads are not acceptable.

11.7 NON-GRAVITY SYSTEMS (PUMPS)

Pump systems (includes the pumps, force mains, electrical and power supply equipment, structures and appurtenances) are not generally an approved method of conveying, storing, or treating storm water. If this alternative is used, the engineer must demonstrate that a pump system is the only feasible drainage alternative. A deviation must be approved by BSBPWD in order to pump storm water.

12 MINIMUM DESIGN STANDARDS – PIPE, CURB AND GUTTER AND OPEN CHANNEL INFRASTRUCTURE

The engineer and contractor shall refer to MPWSS as modified by these minimum Engineering Standards promulgated by BSBPWD.

12.1 ROAD SECTION

Roads and streets shall be designed with adequate longitudinal and cross slopes (minimum 0.5 percent and two percent, respectively) and to ensure proper drainage. Roads should have a normal crown at the center of the road (or between opposing driving lanes).

12.2 CURB AND GUTTER

Curb and gutter shall be required for all new and redevelopment projects. For projects located with the Historic Uptown Butte Zoning District, a vertical curb and gutter section shall be constructed to maintain historical character. All other areas shall have an integral curb and gutter system conforming to the curb and gutter details provided in MPWSS (Standard Drawing 02528-1), unless written approval is granted by the BSBPWD.

12.3 OPEN CHANNELS

Minimum freeboard requirements for open channels shall be ½-foot below the top of bank for the design flow rate. Additional freeboard should be included for large conveyance channels.

Rock riprap for channel armoring shall conform to the Montana Department of Transportation for Road and Bridge Construction, Section 613, Rip-rap and Slope and Bank Protection.

Swales shall be located no closer than ten feet to any structure foundation measured horizontally from the edge of the swale at the freeboard elevation.

12.4 UNDERGROUND UTILITY SEPARATIONS AND MINIMUM CLEARANCES

Storm drain piping shall not be located:

- Within the 1:1 slope from the bottom edge of the pipe or structure to the finished grade at a building or structure;
- Within the 1:1 slope from the bottom edge of the pipe or structure to the property line at finished grade when an easement is not provided on the adjacent property;

- Underneath any structure (e.g. buildings, sheds, decks, or retaining walls which run parallel to the pipeline);
- Where such facilities interfere with other underground utilities; and
- Where allowable design loads would be exceeded.

At a minimum, the following utilities shall be shown on the plans: cable television, fiber optic cable, natural gas, power, sanitary sewer, telephone, and water. Check for crossing or parallel utilities. Maintain minimum vertical horizontal clearances. Avoid crossing at highly acute angles (the smallest angle measure between utilities should be between 45 and 90 degrees).

Where storm drainpipes cross over or below a water main, one full length of pipe shall be used with the pipes centered for maximum joint separation. All storm water piping crossing water mains must consider the potential effects of frost and measures should be considered by design engineer to prevent the freezing of water mains by providing insulation equivalent to 6½ feet of cover for water mains.

For storm drain crossings of water and sanitary sewer pipelines, the Montana Circulars DEQ 1 and 2 for water/wastewater systems and Montana Department of Environmental Quality criteria will apply.

Clearances in Table 12-1 are from edge-to-edge of each pipe.

Table 12-1 . Required Minimum Utility Clearances

<i>Utility</i>	Required Clearance	
	Vertical (inches)	Horizontal (feet)
<i>Water</i>	18	10
<i>Sanitary Sewer</i>	12	5

The engineer must check with local utility providers to verify site specific utility requirements for cable TV, gas transmission, gas distribution, overhead power, underground power, telephone, and fiber optic.

12.5 TRENCH DESIGN

Trenches shall be excavated to the width, depth, and grade as set forth in MPWSS. Material excavated that is unsuitable for backfill shall not be used for filling on or around storm water facilities. In paved areas within the public right-of-way, provide a neat vertical saw cut in existing pavement.

Trenches shall be backfilled in accordance with MPWSS as modified herein. All backfill within the pipe compaction zone shall be compacted to a minimum of 95 percent of maximum dry density per ASTM D 1557 (Modified Proctor).

Excavated material may be used as trench backfill when it has been demonstrated by the contractor to meet gradation and compaction requirements.

12.5.1 INSTALLATION OF STORM DRAINPIPE

Installation of storm drainpipe shall be in accordance with the MPWSS as modified.

Existing storm flows shall be diverted away from the pipe segment under construction by methods approved by BSBPWD.

12.5.2 PIPE BEDDING MATERIAL

Pipe bedding material shall be in accordance with MPWSS Section 02221 for Trench Excavation and Backfill for Pipelines & Appurtenant Structures and pipe and fitting manufacturer's specifications for bedding material.

Excavated material may be used as pipe bedding when it has been demonstrated by the contractor to meet gradation and compaction requirements.

12.6 CONNECTIONS/MODIFICATIONS TO PUBLIC DRAINAGE SYSTEM

When connecting existing metal storm pipe to new catch basins, the contractor shall treat the newly exposed end of the pipe per the following.

Provide enamel linings and coatings in accordance with the following:

- Provide minimum dry film of five mils of acceptable asphalt base material.
- Provide coating subject to following additional requirements.
 - Do not use enamel-lined or coated-steel pipe exposed to temperatures below ten degrees Fahrenheit.
 - Do not handle enamel-lined or coated-steel pipe when temperature of pipe is below 20 degrees Fahrenheit.
 - Galvanize surface in accordance with hot-dip method using a grade of zinc acceptable to ASTM B6.

Where new pipe is connected to existing, the Contractor shall verify the type of existing pipe and join in-kind with new. If the existing pipe is no longer an approved material, the Contractor shall connect the new to the existing with an appropriate coupling device. The appropriate coupling device shall be approved by BSBPWD prior to installation.

The following connections to a pipe system shall be made only at structures:

- When the inletting pipe is greater than eight inches in diameter; or
- When roadway, driveway or parking lot runoff is conveyed; or
- When commercial and multi-family storm water pipes connect to the municipal conveyance system; or
- When connecting to corrugated metal pipe (CMP) conveyance systems.

Roof/footing/yard drainpipes, eight inches or less in diameter, from single family residences, may be connected to the existing storm water conveyance system by core drilling the appropriate diameter hole. Protrusions into storm drain mains or laterals shall be contoured to match main inside wall if a Tee is not used.

When a connection is made without the benefit of a structure, a clean-out shall be provided upstream of each tee on the inletting private drainage system pipe.

When connecting pipes at structures, match crowns whenever possible.

12.7 STORM DRAIN PIPING

Off-site storm water flows passing through the site shall be conveyed by a hydraulically adequate conveyance system as set forth herein.

Catch basins or manholes are required when joining pipes of different materials (does not apply to "taps") and joining pipes of different slopes. Vertical bends are not permitted.

Minimum slope for storm drain mains shall be 0.5 percent, unless specified otherwise herein. Minimum diameter for storm drain mains within a road section or public right of way shall be 12 inches.

Only the pipe materials listed below are approved for use in storm drain systems and culverts. Pipe systems shall meet MPWSS, as modified herein, for the materials shown below. The minimum pipe diameter for all publicly owned and maintained storm pipe shall be eight inches; however, some pipe materials have higher minimum diameters.

Minimum and maximum fill depth shall meet manufacturer requirements for type and class of pipe.

Solid Wall Polyvinyl Chloride (PVC) Pipe

PVC pipe must be at least SDR 35 and meet the requirements of ASTM D 3034 for diameters up to 15 inches and ASTM F 679, Type I for sizes 18 to 27-inch diameter.

Profile Wall PVC Pipe

Profile wall PVC pipe shall conform to AASHTO M 304. Joints shall be an integral bell gasketed joint conforming to ASTM D 3212. Elastomeric gasket material shall conform to ASTM F 477. The minimum pipe diameter shall be 8 inches. The maximum pipe diameter shall be 15 inches or the diameter for which a supplier has a joint conforming to ASTM D 3212, whichever is less. Fittings for profile wall PVC pipe shall meet the requirements of AASHTO M 304 and shall be injection molded, factory welded, or factory solvent cemented.

Polypropylene (PP) Pipe

Polypropylene (PP) pipe shall have smooth interior and shall be joined with a gasketed integral bell and spigot joint providing a watertight seal. Fittings shall utilize welded or integral bell and spigot with gaskets meeting ASTM F 477. Fitting joints shall meet the watertight joint performance requirements of ASTM D 3212. Installation of PP pipe shall be in accordance with ASTM D 2321 and manufacturer's recommended guidelines. Gasketed joints shall be lubricated during installation as recommended by the manufacturer. The minimum pipe diameter shall be 12 inches.

Corrugated Polyethylene Pipe (CPEP)

Corrugated polyethylene pipe (CPEP), a type of HDPE, shall have a smooth interior wall and meet the requirements of AASHTO M294, Type S for 12-inch through 60-inch sizes (or AASHTO

M252, Type S for eight- and ten-inch sizes) and ASTM F2306. Joints for corrugated polyethylene pipe shall be watertight per ASTM D 3212. Installation of PE pipe shall be in accordance with ASTM D 2321 and manufacturer's recommended guidelines. Gasketed joints shall be lubricated during installation as recommended by the manufacturer. The minimum pipe diameter shall be 8 inches.

Reinforced Concrete Pipe (RCP)

RCP shall meet ASTM C-76 with a joint conformation to ASTM C-443, providing a watertight O-Ring gasket joint.

12.8 CULVERTS

Culvert crossings within the urban and suburban area of Butte are generally limited to driveway culverts. The minimum diameter of any driveway culvert shall be 12 inches. Where minimum cover requirements can be met, an 18-inch diameter culvert is required to minimize debris blockages.

Culverts outside of the urban boundary may be made of concrete, steel, aluminum, or corrugated polyethylene pipe (CPEP). Culverts within the urban boundary shall be made of concrete or CPEP only. Factors to be considered in material selection include bed load, structural strength, hydraulic roughness, in-place foundation conditions, abrasion and corrosion resistance and water tightness requirements.

Headwalls, cut-off walls, and/or anti-seep features shall be provided on culverts where the hydraulic piping of bedding and backfill materials is possible.

12.9 MANHOLES, CATCH BASINS, AND INLETS

12.9.1 DESIGN CONSIDERATIONS

Storm water inlets located in a roadway with a sloping grade shall be located in the curb line and shall be fitted with vaned grates.

A through-curb inlet frame shall be used where conditions limit the effectiveness of a flat grate inlet. Examples of such conditions are where a high likelihood of clogging from leaf fall or other debris exists, in sag vertical curves, intersection curb returns, and when the structure is a surface drainage end point, such as in a cul-de-sac.

Non-vaned grates or combination inlets shall be used in vertical sag locations (low spots).

12.9.2 SPACING REQUIREMENTS

Maximum spacing between inlet grates shall be based on the spread width calculations provided by the Design Engineer. The spread width for the design storm cannot exceed ½ the nearest travel lane. The inlet spacing may be adjusted based upon grate flow capacities and design conditions. Inlet spacing supporting calculations may be required if deviating from spacing requirements herein. Refer to HEC-22 Section 4.4.6 and Appendix B.

Maximum distance between manholes is 400 feet along storm mains. For storm mains greater than 13 feet in depth (as measured from the deepest pipe invert to the top of the grate or manhole), manholes shall be a minimum of 60 inches (diameter). For storm mains greater than 20 feet deep manholes shall be 72 inches (diameter).

The number and size of pipes that may be connected to any one structure (manhole or catch basin) shall be limited in order to maintain the integrity of the structure and must follow manufacturer's specifications for pipe spacing and structure sizing.

12.9.3 ADJUSTING MANHOLES AND CATCH BASINS TO GRADE

Where shown on the approved plans or as directed by Butte-Silver Bow, existing manholes, catch basins and inlets shall be adjusted to conform to finished grade in accordance with standard detail Adjusting Manholes and Catch Basins to Grade of the MPWSS as modified herein.

Where riser bricks (blocks) are used to bring the frame to grade, the maximum height of the brick shall be two rows. If more than two rows of bricks are required, a precast riser section shall be used along with no more than two rows of bricks to complete the adjustment.

12.9.4 MATERIALS

Precast concrete products for manholes, inlets, and catch basins shall comply with the MPWSS. Infrastructure within the Butte historic district may need to be adjusted to comply with integrated sidewalk and vertical curb.

Metal castings for frames, inlet grates, and rectangular covers shall conform to the MPWSS as modified herein. Rings and covers shall be designed per Butte-Silver Bow Utilities Division Standards. All grates must be bicycle safe when practicable. Circular grates must not be used in curve and gutter flow lines.

Acceptable inlet grates and manhole covers are listed in Table 11-2:

Table 12-1. Approved Inlet Grates

Manufacturer*	Grate #	Dimensions	Style	Application
D&L Foundry	I-3559	36" Dia	Vaned	Inlet on slope
	I-3559	36" Dia	Non-vaned	Inlet on sag
	I-3517	31"x43"	L	Combination manhole sloping, high traffic & bikes
	I-3519	31"x43"	DL, Directional	Combination manhole sag high water flow areas
	A-1174	24" Dia	Label as Storm Drain	Storm manhole cover

Note: *D&L Foundry provided for reference or approved equal

All catch basin grated covers in roadways shall be ductile iron grates with cast iron frames, per these engineering standards or approved equal. Vaned gates shall be used where $S > 0.4$ percent, or as required by BSBPWD.

Grated covers with wording similar to "Outfall to Stream, Dump No Pollutants" is recommended. Round and rectangular storm manhole covers with raised lettering "STORM DRAIN" is recommended.

Dipping, painting, welding, plugging or any repair of defects to castings shall not be permitted in accordance with AASHTO M 306.

All structure ladders, when used, shall be firmly attached using stainless steel hardware and extend to the bottom of the structure.

Vertical ladders or steps shall be installed immediately under the cover or grate opening to a walkable surface on all structures exceeding four feet deep to the pipe invert.

When connecting to a concrete structure, openings must be core-drilled unless an existing knockout is available. Connections shall be made with watertight rubber boots, sand collars, manhole adapters, or other approved watertight connectors except for 1) concrete; 2) ductile iron; 3) corrugated metal pipe. For 1, 2, and 3 above, connections shall be made with non-shrink Portland Cement Grout to make a watertight connection.

12.10 SERVICE CONNECTIONS

Private storm drainage systems shall comply with all criteria for storm water systems set forth herein unless specifically exempted.

All service connections shall connect to any existing storm water conveyance system within 100 feet and downgradient of the property line.

For driveways, parking lots and situations not listed above, the minimum diameter for conveyance pipes shall be eight inches.

Any storm line with a 20 percent slope or greater shall provide pipe anchors to provide stability on the slope.

12.11 RUNOFF CONTROL BEYOND THE PROPERTY LINE

12.11.1 DISCHARGE LOCATION

The Owner or Engineer shall show the location of storm water discharge from the project boundary to the nearest existing municipal storm water structure or natural water body.

Where a downstream drainage system does not exist adjacent to the property and the runoff from the project site was previously unconcentrated flow, the downstream drainage system shall be extended to the property line and the location and direction of all runoff from the property shall be documented. The Owner shall secure drainage easements from the downstream owners and record such easements prior to drainage design plan approval as necessary under State Law. Refer to Section 13 regarding easements.

12.11.2 ALTERNATE DISCHARGE

If the Owner finds that easements per Section 13 herein are not reasonably obtainable, then all additional runoff from development shall be conveyed to an infiltration system per these engineering standards.

12.11.3 TEMPORARY DISCHARGES TO THE SANITARY SEWER

Storm water runoff into the sanitary sewer system is prohibited. Temporary discharges into the sanitary sewer system may be permissible but must be approved by:

- BSBPWD,
- Wastewater Treatment Plant (WWTP) Supervisor, or
- Utilities Maintenance Supervisor.

Butte-Silver Bow WWTP Supervisor and the Metro Sewer Utility Maintenance Supervisor will determine the:

- Location of connection to the sanitary sewer,
- Method for the connection and pre-connection requirements (i.e., settling tanks, sump pump, etc.),
- Time of discharge,
- Duration, rate and volume of the discharge, and
- Other applicable discharge conditions.

13 MISCELLANEOUS DESIGN CONSIDERATIONS

13.1 TRENCH PLUGS

Trench plugs shall be installed in accordance with MPWSS as modified herein.

Where utility conduits may convey groundwater in the trench backfill material, trench plugs shall be installed in accordance with MPWSS, but at a frequency of no less than one per block or 500 feet, whichever is less.

Trench plugs may be constructed of low permeability clays (1×10^{-7} cm/s), or flowable fill as defined by MPWSS.

13.2 ENCASING REQUIREMENTS

Storm water pipelines shall be encased in casing pipe when crossing under the following structures, where the ability to remove and replace pipe without disturbance to the structure is needed:

- Crossing under retaining walls over five feet high (measured from the bottom of the base rock to top of wall);
- Crossing under retaining wall footings over five feet wide;
- Crossing under segmental block, crib, and reinforced earth-type retaining walls; or
- As required by MDT, Railroad, or other authorities.

Casings shall extend beyond the facing, footing and backfill reinforcement zone a minimum of five feet or a distance equal to the depth of the pipe whichever is greater. The carrier pipe shall be supported by casing spacers when the casing length exceeds ten feet where casing spacers are not used, the carrier pipe shall be more than ten feet in length (no pipe joints inside casing).

If the cover is less than three feet between the bottom of footing or base rock, a casing is required regardless of wall height.

For storm pipes greater than 24 inches in diameter, design exceptions for encasement pipe may be permitted on a case-by-case basis by BSBPWD. Design exceptions, if allowed, are only permitted on a pre-authorization basis, and only after fully considering other alignments, routing, and methods of conveyance.

13.3 LOCATORS

Installation of all non-linear plastic pipe, lot stubs and under-drains shall include a locator wire. The locator wire shall be installed on top of and secured to the pipe. The Contractor shall furnish and install a No. 12 AWG solid copper wire between drainage structures and extend the wire at least one foot into the structure.

Ends of each storm drain stub at the property line shall be capped and located with a two-inch by four-inch timber, embedded to the stub cap, with a copper locator wire attached, and marked permanently "STORM". The stub depth shall be indicated on the marker.

13.4 ABANDONING FACILITIES

Abandoning Pipe In-Place

The Contractor shall completely fill the pipeline to be abandoned with concrete, or controlled density fill; or remove it.

Abandoning Structures

Abandonment of ponds, infiltration basins or other detention/retention structures shall be completed only after conveyance systems have been properly abandoned. Structures within the public right-of-way, a public easement or which are part of the publicly owned and maintained system, must be removed completely or abandoned provided no conflicts with new utilities or improvements arise.

13.5 PROTECTION OF WETLANDS AND RIPARIAN AREAS

When storm water discharges to a wetland and there is no alternative downstream discharge location, runoff may be discharged to the wetland in accordance with the provisions in this section. To maintain and protect existing wetlands, storm water runoff from all storms larger than the two-year, 24-hour storm shall be limited to:

- 1) 50 percent of the existing two-year, 24-hour design storm peak runoff rate for the area tributary to the wetland;
- 2) A rate as determined by a qualified wetlands biologist; or
- 3) A rate specified by a resource agency having jurisdiction over wetlands. Runoff in excess of the specified rate can bypass the wetland.

Wetlands may not be filled in without prior approval from the US Army Corps of Engineers and local authorities, as appropriate. In situations where a wetland is allowed to be filled, the owner must provide runoff treatment and conveyance equivalent to that provided by the existing wetland to be filled, in addition to any other runoff treatment and/or wetland mitigation required by these standards and applicable codes.

13.6 EMERGENCY LAND MANAGEMENT PRACTICES

No prior notification is required for emergency land management practices necessitated by fire, flood, windstorm, earthquake, structural failure or other catastrophic events. Within five days after commencement of such activity, the Owner shall notify BSBPWD of the action with an explanation of why emergency action was necessary. Reasonable care must be taken to minimize soil disturbance and erosion during the conduct of emergency land management practices.

14 EASEMENTS

14.1 GENERAL

Drainage facilities that are constructed to serve predominantly public property or public right-of-way shall be publicly owned and shall be dedicated to Butte-Silver Bow.

Where possible, public storm water conveyance systems shall be constructed within the public right-of-way. When site conditions preclude this requirement, public utility easements or dedicated tracts shall be provided and included on the Certificate of Survey or recorded Right-of-Way / Utility Easement. Private drainage facilities shall be constructed on private property.

When vehicle access for maintenance is required, a dedicated tract or access easement shall be provided. The access easement conditions shall prohibit the property owner from installing any landscaping, improvements, retaining walls, etc., which would hinder access to the drainage facility or necessitate restoration of access easement area.

14.2 EASEMENT WIDTH

For pipes and vaults, the required utility easement width can be calculated using one of the following methods: 1) a minimum of 20 feet; or 2) determined by extending a line from the bottom edge of the structure or the bottom of the excavation at the outside diameter for pipes, at a 1 H: 4V slope until it intercepts the finished grade. Butte-Silver Bow Public Works shall select the required easement width based on site conditions.

For pipes/vaults 5 feet and greater in width, the minimum utility easement width shall be the outside dimension plus 15 feet, but not less than 20 feet total width.

For open channels to be maintained by the BSB the utility easement width shall include the entire width of the channel (top-of-bank to top-of-bank or width at freeboard elevation) plus maintenance access when deemed necessary by the BSB Public Works. For privately-maintained open channels, the private utility easement width shall be, at minimum, the width of the channel at freeboard elevation.

For maintenance access roads, the minimum access easement width shall be 15 feet.

Storm drainage facilities shall be located in the center of the easement unless approved by BSB Public Works.

14.3 EASEMENT DOCUMENTATION

All easements shall be shown on the project plans and shall be designated either "private" or "public".

All property documentation shall be properly executed. Easement/tract documents shall include a map, the Butte-Silver Bow Certificate of Survey, Subdivision Plat or recorded Deed of affected properties, property legal description, Geocode, and owners' names.

Easements shall be dedicated to and approved by BSB prior to acceptance of a public drainage system. Grantee shall be "BSB, a municipal corporation, its heirs, successors, or assignees."

Indemnification and hold-harmless agreements to hold BSB harmless shall be included in recorded documents where maintenance access across private property and/or pumping of storm drainage is deemed necessary by BSB.

Bills of sale for all drainage facilities appurtenant to public easements or tracts shall be given to BSB with the executed real property documents that transfer property rights to BSB. Grantor shall pay all title policy and recording fees necessary to transfer rights to BSB Maintenance Access. All storm water facilities shall have sufficient easement widths in order to be accessible for maintenance and operation.

When vehicle access is necessary, access roads shall be provided in dedicated tracts or dedicated access easements. The minimum clear driving lane width is 12 feet.

For culverts, provide maintenance access easements for inspection and debris removal of the upstream and downstream ends of the culvert.

Gates and/or bollards are required when necessary to restrict access to storm water facilities. Cables and/or chains stretched across access roads are not acceptable.

Where no direct vehicle access can be provided or when greater than 15 feet from a roadway, all structures shall be channelized and shall not have catchments. Provide an oversized catch basin to compensate for lost catchments at the first available access point for maintenance vehicles. An easement for to a vehicle access ramp shall be provided as necessary.

Roof, footing, and yard drainage systems, drainage systems on commercial and multi-family properties, drainage facilities within private easements, and drainage facilities otherwise denoted as private, shall be designed to provide access for maintenance and operation by the owners of such facilities.

Additional maintenance requirements specific to individual storm water facilities are included in Section 9.

15 REFERENCES

FHWA HEC-14, Hydraulic Design of Energy Dissipators for Culverts and Channels, 2006
FHWA HEC-22 Urban Drainage Design Manual 2009
Montana DEQ Circulars DEQ 1 August 2014
Montana DEQ Circular DEQ 2 2016
Montana DEQ Circular DEQ 4 2013
Montana DEQ Circular DEQ 8 2017
Montana DEQ, General Permit for Storm Water Discharge Associated with Small Municipal Separate Storm Sewers (MS4), Permit Number MTR04000, January 1, 2017
Montana Public Works Standards Specifications Sixth Ed. April 2010
Montana Department of Transportation Model Drainage Manual October 1995
Montana Department of Transportation for Road and Bridge Construction, Section 613, Rip-rap and Slope and Bank Protection
United States Department of Agriculture, Natural Resources Conservation Service. 2009. Soil Survey of Silver Bow County Area and Parts of Beaverhead and Jefferson Counties, Montana. Federal Register Volume No: 64, No: 235, Page Number: 68721-68851
CFR Title: 40, Part: 9, 122, 123, 124 Published: 12/08/1999
Water and Environmental Technologies, PC March 2003. Storm Water Management Program for the Butte MS4.

APPENDIX A
DEFINITIONS

For the purpose of these engineering standards, the following terms phrases and words, and their derivatives shall have the meaning given herein, except where the context clearly indicates a different meaning:

Accelerated erosion means erosion caused by development activities that exceeds the natural processes by which the surface of the land is worn away by the action of water, wind, or chemical action.

Applicant means a property owner or applicant of a property owner who has filed an application for a storm water management permit.

As-built plan means a set of engineering or site drawings that delineate the specific permitted storm water management features as actually constructed.

Appeals board shall be the Public Works Committee of the Council of Commissioners.

Authorized enforcement agency means the Director, employees or designees of the Butte-Silver Bow Public Works Department are designated to enforce this ordinance.

Best Management Practices (BMPs): schedules of activities, prohibitions of practices, general good housekeeping practices, pollution prevention and educational practices, maintenance procedures, and other management practices to prevent or reduce the discharge of pollutants directly or indirectly to storm water, receiving waters, or storm water conveyance systems. BMPs also include treatment requirements, operating procedures, and practices to control site runoff, spillage or leaks, sludge or water disposal, or drainage from raw materials storage.

Butte-Silver Bow (BSB) means the local government of the City and County of Butte-Silver Bow, Montana, including all officers, employees, agents, boards, departments, commissions and authorities and includes all of that area within its jurisdiction with authority to inspect or enforce storm water compliance.

Channel means a natural or artificial watercourse with a definite bed and banks that conveys flowing water continuously or periodically.

Clean Water Act means the federal Water Pollution Control Act (33 U.S.C. ' 1251 et seq.), and any subsequent amendments thereto.

Construction activity means activities subject to the requirements of this ordinance. These include construction projects resulting in land disturbance greater than or equal to one acre. Such activities include but are not limited to clearing and grubbing, grading, excavating, and demolition.

Construction Site BMP Manual means the most current Montana Department of Transportation Erosion and Sediment Control Best Management Practices (BMP) Reference Manual and Field Manual or EPA National Menu of Best management Practices (BMPs), as amended from time to time.

Dedication means the deliberate appropriation of property by its owner to general public use.

Drainage easement means a legal right granted by a landowner to a grantee allowing the use of private land for storm water management purposes.

Existing Conditions means the existing site condition if the development does not require Subdivision Review from the Montana Department of Environmental Quality and all phases of the project are considered. If the development requires Subdivision Review, Existing Conditions means the undeveloped or native condition.

Hazardous materials mans any material, including any substance, waste, or combination thereof, which because of its quantity, concentration, or physical, chemical, or infectious characteristics may cause, or significantly contribute to, a substantial present or potential hazard to human health,

safety, property, or the environment when improperly treated, stored, transported, disposed of, or otherwise managed.

Illegal discharge means any direct or indirect non-storm water discharge to the storm water system, except as exempted in Article III, Section 2 of the BSB Storm Water Ordinance.

Illicit connections mean either of the following:

- a. Any drain or conveyance, whether on the surface or subsurface, which allows an illegal discharge to enter the storm water system including but not limited to any conveyances which allow any non-storm water discharge including sewage, process wastewater, and wash water to enter the storm water system and any connections to the storm water system from indoor drains and sinks, regardless of whether said drain or connection had been previously allowed, permitted, or approved by an authorized enforcement agency.
- b. Any drain or conveyance connected from a commercial or industrial land use to the storm water system which has not been documented in plans, maps, or equivalent records and approved by an authorized enforcement agency.

Impervious surface means those surfaces that cannot effectively infiltrate rainfall (e.g., building rooftops, pavement, sidewalks, driveways, etc.).

Industrial activity means activities subject to NPDES Industrial Permits as defined in 40 CFR, Section 122.26 (b)(14).

Land disturbing activity means any activity which changes the volume or peak flow discharge rate of rainfall runoff from the land surface. This may include the grading, digging, cutting, scraping, or excavating of soil, placement of fill materials, paving, construction, substantial removal of vegetation, or any activity which bares soil or rock or involves the diversion or piping of any natural or artificial watercourse.

Landowner means the legal or beneficial owner of land, including those holding the right to purchase or lease the land, or any other person holding proprietary rights in the land.

Lateral means storm conveyance piping from the inlet to the municipal trunk main.

Maintenance agreement means a legally recorded document that acts as a property deed restriction, and which provides for long-term maintenance of storm water management practices.

MS4 means Municipal Separate Storm Sewer as defined by the Environmental Protection Agency.

National Pollutant Discharge Elimination System (NPDES) Storm Water Discharge Permit means a permit issued by EPA (or by a State under authority delegated pursuant to 33 USC ' 1342(b)) that authorizes the discharge of pollutants to waters of the United States, whether the permit is applicable on an individual, group, or general area-wide basis.

Non-point source pollution means pollution from non-discernable, unconfined, diffuse sources and shall include, but not be limited to, pollutants from agricultural, silvicultural, mining, construction, subsurface disposal, and urban runoff sources.

Non-storm water discharge means any discharge to the storm drain system that is not composed entirely of storm water.

Off-site facility means a storm water management measure located outside the subject property boundary described in the permit application for land development activity.

On-site facility means a storm water management measure located within the subject property boundary described in the permit application for land development activity.

Off-site sedimentation means the deposit of soil material beyond the limits of the property undergoing land disturbing activity or in city streets, alleys or drainage facilities in an amount sufficient to constitute a threat to public safety and comfort.

Outfall means the place where a sewer, drain, or channel discharges to surface waters.

Person means any individual, association, organization, partnership, firm, corporation or other entity recognized by law and acting as either the owner or as the owner's agent.

Pollutant means anything which causes or contributes to pollution. Pollutants may include, but are not limited to: paints, varnishes, and solvents; oil and other automotive fluids; non-hazardous liquid and solid wastes and yard wastes; refuse, rubbish, garbage, litter, or other discarded or abandoned objects, ordinances, and accumulations, so that same may cause or contribute to pollution; floatables; pesticides, herbicides, and fertilizers; hazardous substances and wastes; sewage, fecal coliform and pathogens; dissolved and particulate metals; animal wastes; wastes and residues that result from constructing a building or structure; and noxious or offensive matter of any kind.

Premises mean any building, lot, parcel of land, or portion of land whether improved or unimproved including adjacent sidewalks and parking areas.

Professional engineer means an engineer properly registered, licensed, and qualified to conduct storm water and erosion control design work within the State of Montana.

Project Area means the entire parcel for permanent storm water infrastructure. If the Professional Engineer describes why retention/detention is not possible for the entire parcel, and why compensatory retention/detention is not possible, then the project area may be reduced to the construction disturbance area at the discretion of the BSB Public Works Department.

Peak Flow After Development means the peak runoff rate from the Project Area for the proposed site development including all planned and/or future phases of the project or Proposed Development.

Peak Flow Before Development means the peak runoff rate from the Project Area for the existing site condition if the development does not require Subdivision Review from the Montana Department of Environmental Quality and all phases of the project are considered. If the development requires Subdivision Review, the Peak Flow Before Development means the peak runoff rate from the Project Area for the undeveloped or native condition.

Post-Project Conditions means the Project Area for the proposed site development including all planned and/or future phases of the project.

Regulated Area means the project is located within the 2010 Urban Limit Boundary. The map detailing the Urban Limit Boundary is located on the BSB Storm Water website (<https://bsbstormwater.org>).

Responsible party means a business entity, franchised utility company, developer, landowner, contractor or holder of a building permit who is required to comply with the terms of this ordinance.

Stop work order means an order issued which requires that all land disturbance activity on a site be stopped.

Storm water means any surface flow, runoff, and drainage consisting entirely of water from any form of natural precipitation and resulting from such precipitation.

Storm water system means publicly-owned facilities by which storm water is collected and/or conveyed, including but not limited to any roads with drainage systems, municipal streets, gutters, curbs, inlets, piped storm drains, pumping facilities, retention and detention basins, natural and human-made or altered drainage channels, reservoirs, and other drainage structures.

Storm water management means the use of structural or non-structural practices that are designed to reduce storm water runoff pollutant loads, discharge volumes, and/or peak flow rates.

Storm water management facilities mean those structures and facilities that are designed for the collection, conveyance, storage, treatment, and disposal of storm water runoff.

Storm water engineering report means a written document that details the Best Management Practices, use of structural or non-structural practices to be implemented by a person or business designed to reduce storm water runoff, pollutant loads, discharge volumes, and/or peak flow rates to the maximum extent practicable.

Storm Water Pollution Prevention Plan means a plan that is designed to minimize the accelerated erosion and sediment runoff at a site during construction activities.

Temporary erosion control devices mean devices installed or practices implemented and maintained during land disturbance activities to prevent, minimize, or control the erosion and deposit of soil materials.

Wastewater means any water or other liquid, other than uncontaminated storm water, discharged from a facility.


Watercourse: A natural or artificial channel through which water flows.

Water quality means those characteristics of storm water runoff from a land disturbing activity that relates to the physical, chemical, biological, or radiological integrity of water.

Water quantity means those characteristics of storm water runoff that relate to the rate and volume of the storm water runoff to downstream areas resulting from a land disturbance activity.

APPENDIX B

FORMS

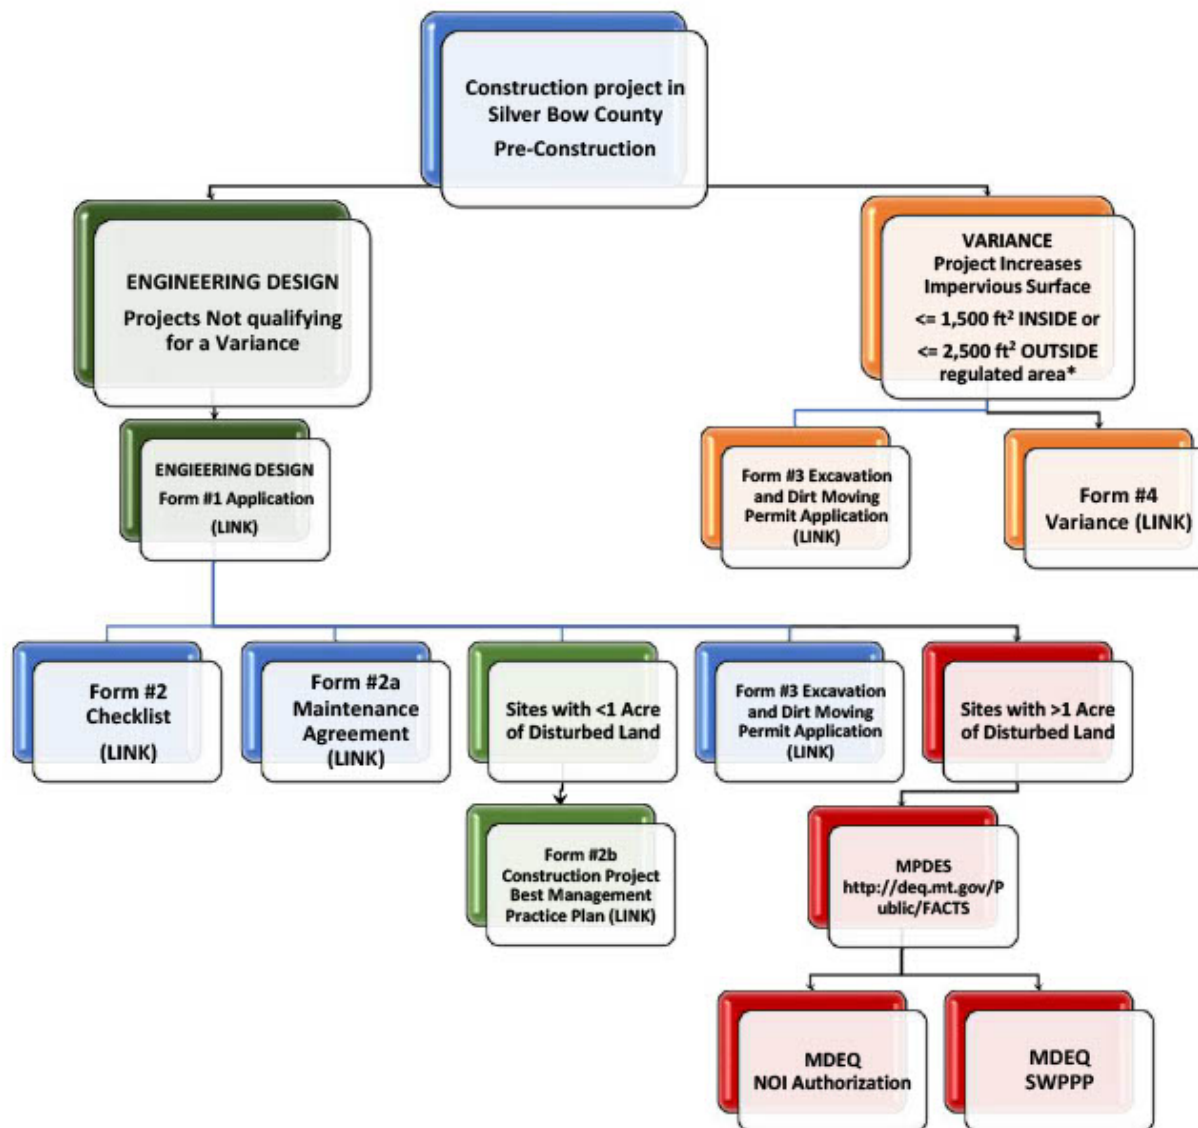

* Regulated Area is the Butte-Silver Bow Urban Limit Boundary - <https://bsbstormwater.org>



FORM #1—APPLICATION

STORM WATER MANAGEMENT PERMIT APPLICATION (PRE-CONSTRUCTION)

Instructions for Applicant:

Construction projects that do not qualify for a variance (Form #4), the following forms must be submitted to Butte-Silver Bow:

- *Form #2—Checklist*
- *Form #2a—Maintenance Agreement*
- *Form #2b—Construction Practice BMP Plan (for sites with <1-acre of disturbed land)*
- *MPDES NOI Authorization Letter (for sites with >1-acre of disturbed land)*

Land disturbance is not permitted on any project site without an approved Butte-Silver Bow Storm Water Management Permit.

Contact Information:

- **Project Owner** – This is the person who owns the construction project. All contact information (Name, Company, Address, Phone, and email) associated with this person is required.
- **Contractor** – This is person(s)/Company hired by the Project Owner to complete the project. All contact information (Name, Company, Address, Phone, and email) associated with this person is required.
- **Engineer** – This is the person(s)/Company hired to complete the design on the project. All contact information (Name, Company, Address, Phone, and email) associated with this person is required.

Project Information:

- **Project Address** – Include the address of the project.
- **Legal Description** – Include the Legal Description of the project. This can be obtained from Montana Cadastral - <http://svc.mt.gov/msl/mtcadastral>
- **Lot Number** – Include the Lot Number of the project. This can be obtained from Montana Cadastral - <http://svc.mt.gov/msl/mtcadastral>
- **Subdivision** - Include the Subdivision information. This can be obtained from Montana Cadastral - <http://svc.mt.gov/msl/mtcadastral>
- **Project Size** – Indicate the appropriate project size (less than/greater than or equal to one acre).

Nature of Construction:

- Check the appropriate box(es) and describe the construction activities.

Project Schedule:

- Complete the project anticipated start, completion, and final stabilization date.

Water Bodies and Storm Conveyance Systems:

- List water bodies within 200' of the project boundary. This information can be obtained from -
<http://svc.mt.gov/deq/wmaDST/default.aspx?requestor=DST&type=CWAIC&CycleYear=2018>
- Does the stormwater runoff from the project site discharge to an impaired water? Check Yes or No. This information can be obtained from -
<http://deq.mt.gov/Portals/112/Water/WQPB/CWAIC/Reports/IRs/2018/Appendix A.pdf>
 - If yes, list impairments.
- List any existing storm water conveyance systems within 100' of the project.
- Check if the project is in a floodplain. This information can be obtained from -
<https://msc.fema.gov/portal/home>
 - If yes, list the status of the permit.
 - If yes, check if the site will be Delineated, Staked and/or Perimeter BMP's installed.

Acknowledgment Certificate:

- The Owner of the project or their authorized agent must sign the document, certifying that the information on the application is true and correct and understand that the project will not start until the application is approved and that the project will comply with the laws of the State of Montana and the ordinance of Butte-Silver Bow.



Butte-Silver Bow Public Works Department

FORM #1—APPLICATION

STORM WATER MANAGEMENT PERMIT

APPLICATION (PRE-CONSTRUCTION)

BSB Permit No.: _____
MDEQ SWPPP No. MTR: _____
Excavation Permit ☐ Yes ☐ No

Instructions for Applicant:

Construction projects that do not qualify for variance (Form #4), the following forms must be submitted to Butte-Silver Bow:

- Form #2—Checklist
- Form #2a—Maintenance Agreement
- Form #2b—Construction Practice BMP Plan (for sites with <1-acre of disturbed land)
- MPDES NOI Authorization Letter (for sites with ≥1-acre of disturbed land)

Land disturbance is not permitted on any project site without an approved Butte-Silver Bow Storm Water Management Permit.

CONTACT INFORMATION

Project Owner

Contact Person: _____
Mailing Address: _____
Phone: _____

☐ Preferred Contact

Company: _____
State: _____ Zip: _____
Email: _____

Contractor

Contact Person: _____
Mailing Address: _____
Phone: _____

☐ Preferred Contact

Company: _____
State: _____ Zip: _____
Email: _____

Engineer

Contact Person: _____
Mailing Address: _____
Phone: _____

☐ Preferred Contact

Company: _____
State: _____ Zip: _____
Email: _____

PROJECT INFORMATION

Project Address: _____
Lot Number: _____

Legal Description: _____

Subdivision (If Applicable): _____

Project Disturbance Size: ☐ Less than one acre

☐ Greater or equal to one acre

Storm Water Engineering Plan (Form #1) BSB Review

Plus \$130/hour for review in excess of the complete-ness and 1 technical review will be invoiced at the completion of the review prior to issuing an approval.

Completeness/1 st Technical Review*	No Charge		
Additional Review	\$130/hour	If Required	To be Invoiced

NATURE OF CONSTRUCTION

Check the appropriate box(es) or provide a brief description that indicates the general nature of the construction activities.

☐ BSB Project ☐ Multi-Family Residential ☐ Highway/Road ☐ Commercial/Industrial
☐ Subdivision ☐ Single Family Residential ☐ Utility ☐ Other: _____

Description of Work: _____



Butte-Silver Bow Public Works Department

PROJECT SCHEDULE

Start Date: _____

Completion Date: _____

Final Stabilization Date: _____

WATER BODIES AND STORM CONVEYANCE SYSTEMS

List water bodies within 200' of project.

Stream: _____

Lakes: _____

Wetlands: _____

Rivers: _____

Sloughs: _____

Other: _____

Does storm water runoff from the project site discharge to an impaired water?

☐ Yes ☐ No Water Body: _____

If yes, what are the impairments?

☐ Sediment ☐ Nutrients ☐ Dissolved Oxygen ☐ Temperature ☐ Other: _____

List storm conveyance systems within 100' of project.

Ditches: _____

Swales: _____

Detention Facilities: _____

Storm Drain Inlets: _____

Pipe Inlets/Outlets: _____

Gutter: _____

Is the project in a floodplain?

☐ Yes ☐ No

If yes, is a permit...

☐ Required ☐ Pending ☐ Issued

If yes, is the site/will the site be...

☐ Delineated ☐ Staked ☐ Perimeter BMPs Installed

ACKNOWLEDGMENT CERTIFICATE

I certify that I am the Owner or Owner's authorized agent. If acting as an authorized agent, I further certify that I am authorized to act as the Owners agent regarding the property at the above-referenced address for the purpose of filing applications for decisions, permits, or review under the Butte-Silver Bow Storm Water Ordinance and have full power and authority to perform on behalf of the Owner all acts required to enable the City to process and review such applications.

I certify that the information on this application is true and correct and understand that I shall not start this project until this application is approved. I shall comply with the laws of the State of Montana and the ordinances of Butte-Silver Bow.

I acknowledge that reviews of this application in excess of the initial completeness and 1st technical review will be invoiced at the completion of the review prior to issuing an approval.

Signature of Legally Responsible Person: _____ Date: _____

(Submission must include original signature)

Name: _____ Title: _____

(Printed)



Butte-Silver Bow Public Works Department

FOR OFFICIAL USE ONLY

The remainder of this application is for official use only.

Greater or Equal to One Acre	Received?	
MPDES NOI Authorization Letter	Yes	No
MPDES SWPPP	Yes	No
Form #2—Checklist	Yes	No
Form #2a—Maintenance Agreement	Yes	No

Less Than One Acre	Received?	
Form #2—Checklist	Yes	No
Form #2a—Maintenance Agreement	Yes	No
Form #2b—Construction Project BMP Plan	Yes	No

REPORT OF TECHNICAL REVIEW

- ☐ After full review, the Storm Water Engineering Report, Plans, and Specifications **meet** the intent of the BSB Storm Water Engineering Standards as identified in the above checklist.
- ☐ After full review, the Storm Water Engineering Report, Plans, and Specifications **do not meet** the intent of the BSB Storm Water Engineering Standards as identified in the above checklist through failure to include the following (additional reviews will be invoiced at a rate of \$130/hour for every hour over 4hours/plan):

Reviewed By

Name: _____ Title: _____ Organization: _____
Signature: _____ Date: _____

STORM WATER ENGINEERING PLAN REVIEW HISTORY

Name of Project: _____ Total Project Acres: _____
Total Disturbed Acres: _____ Date Submitted to BSB: _____
Date Received by Reviewer: _____ Date of Completeness Review: _____
Comments: _____

First Review

Plan Received On: _____ Review Completed On: _____
Reviewed By: _____ ☐ Approved ☐ Denied
Comments: _____

Second Review

Plan Received On: _____ Review Completed On: _____
Reviewed By: _____ ☐ Approved ☐ Denied
Comments: _____

Third Review

Plan Received On: _____ Review Completed On: _____
Reviewed By: _____ ☐ Approved ☐ Denied
Comments: _____



Butte-Silver Bow Public Works Department

FORM #2—CHECKLIST STORM WATER MANAGEMENT PERMIT CHECKLIST (PRE-CONSTRUCTION)

BSB Permit No.: _____
MDEQ SWPPP No. MTR: _____
Excavation Permit ☐ Yes ☐ No

NOTE: This form must accompany Form #1—Storm Water Management Permit Application

Site Name/Address: _____

Please check the appropriate box: I=Included, N/A=Not Applicable (if N/A is checked, an explanation must be entered).

Storm Water Management Requirements	I	N/A	BSB Chk'd
1 Engineer Report Requirements			
A Cover Sheet			
B Table of Contents			
C General			
a Proposed Project Description			
b Physical Address of the Site Where the Work is Proposed (Legal Description, Subdivision Name)			
c Name and Address of Owner			
d Total Project Area			
e Total Disturbed Area			
D Extent of Storm Drainage			
a Location of Storm Water Conveyance System(s) Within 100' of Project (Ditch, Swale, Detention Facility, Storm Drain Inlet, Drywell, Gutter, and Pipe Inlet/Outlet)			
b Describe Existing Conditions Including Structures, Basins, Bypass Areas, Flow Type and Flow Paths, Pervious/Impervious Areas, Slopes, Vegetation/Surface, Soil Type(s), etc.			
c Describe Proposed Developed Conditions Including Structures, Basins, Bypass Areas, Compensatory Areas, Flow Type and Flow Paths, Pervious/Impervious Areas, Slopes, Vegetation/Surface, Source Control, BMPs Runoff Control, Runoff Treatment, etc.			
d Drainage Basin Maps are Provided Which Clearly Label the Following: - Existing Basin Boundaries - Existing Time of Concentration Flowpaths for Each Basin - Post-Development Basin Boundaries - Post-Development Time of Concentration Flowpaths for Each Basin - Discharge Location(s) - Receiving Waters Within 200' of Project are Identified			
e State Runoff Control/Treatment Design Assumptions			
f For Flows That Originate Outside the Project Area, Show That These Flows Will Not Flood Storm Water Facilities			
g For Flows That Originate Within the Project Area, Show Provisions for Detaining or Retaining These Flows			